st for your
TANDY
LOR COMPUTER

August 1986 Canada $4.95 U.S. $3.95

RAINBOW®

THE COLOR COMPUTER MONTHLY MAGAZINE

RECREATION SENSATION

A lineup of sure hits!

Sandworm, Starlord, NymMatch, Eye of the Tiger, Fortune Wheel, and Game Shorties

Improve your Joystick
An Adventure-writing Processor
Esch-A-Sketch Graphics
What's inside a Mouse?
A new Q & A column

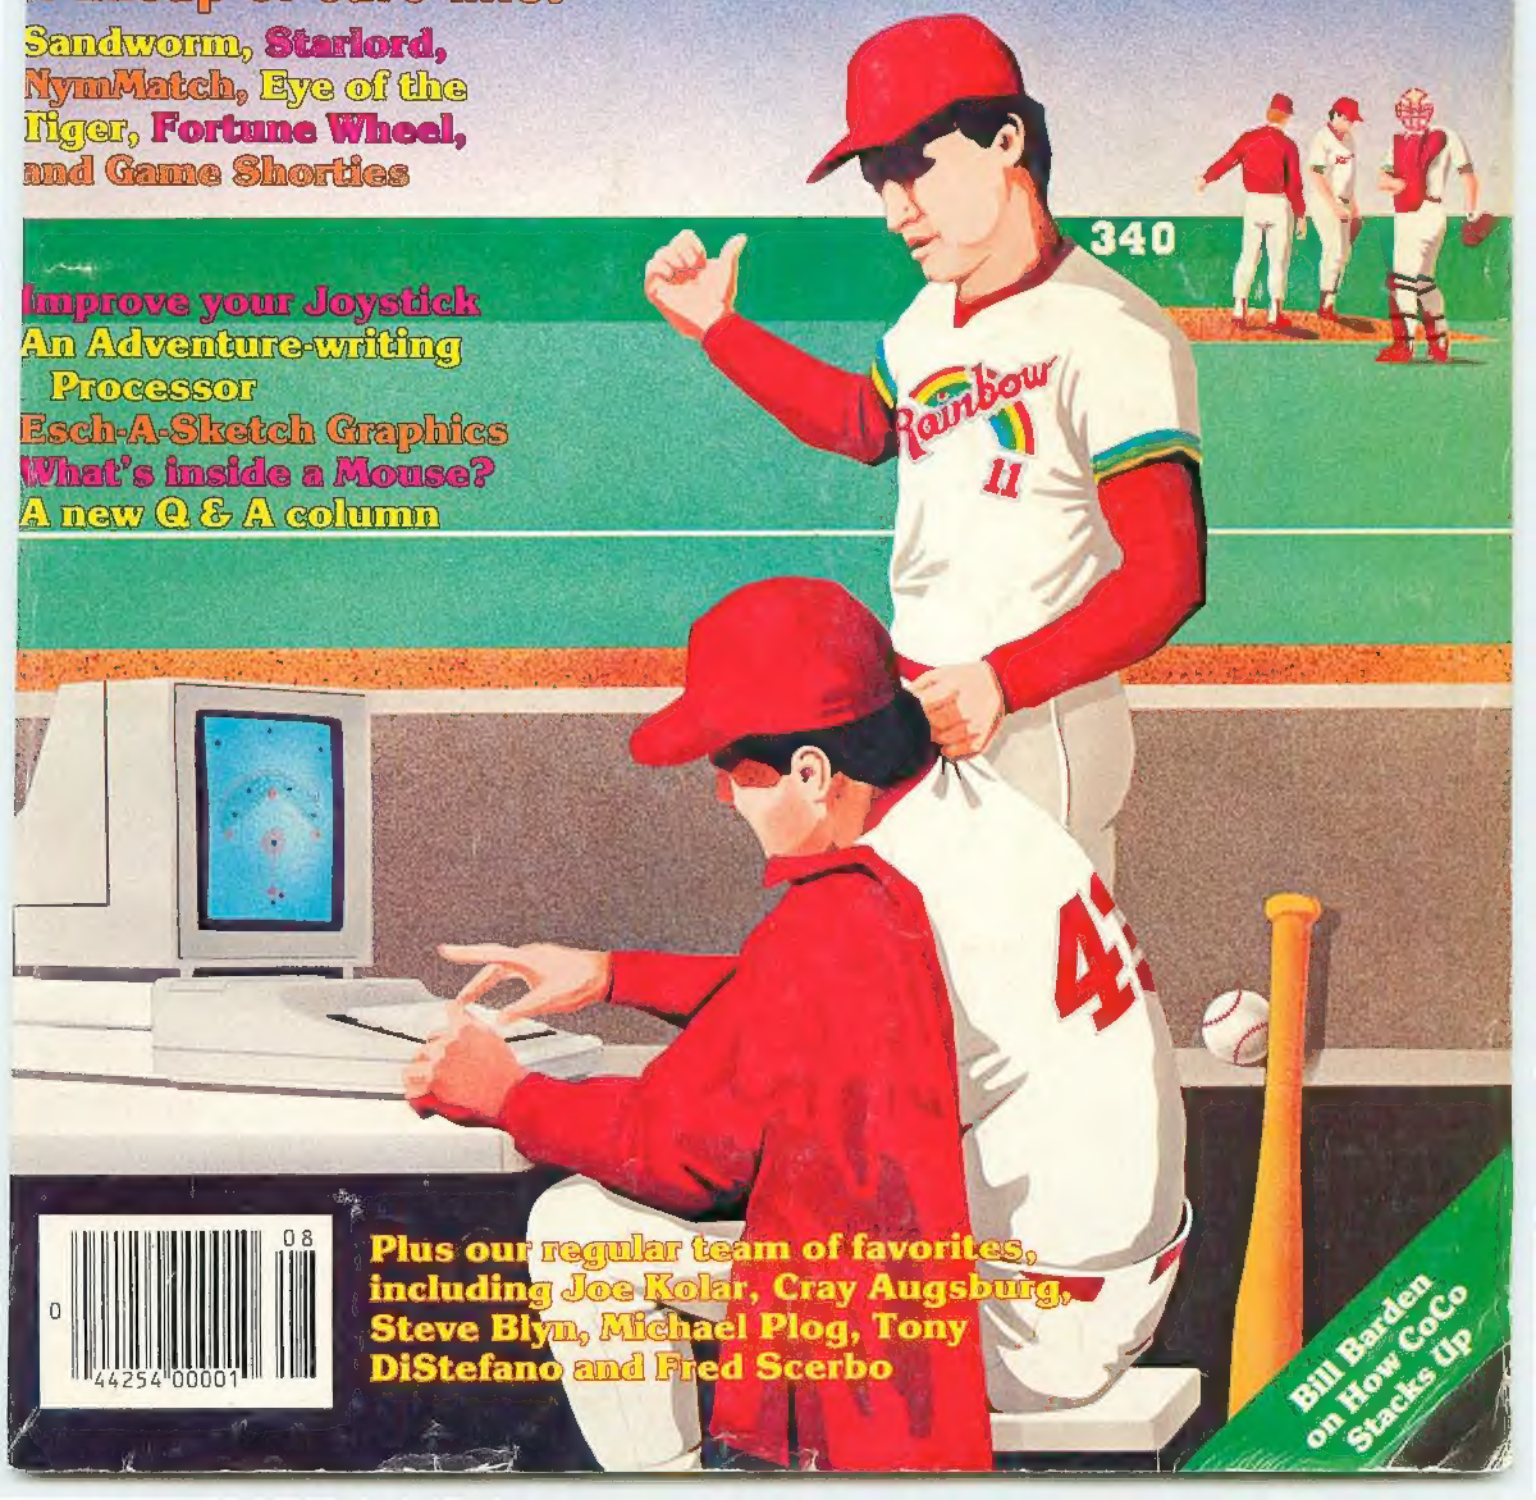

0 08
44254 00001

Plus our regular team of favorites, including Joe Kolar, Cray Augsburg, Steve Blyn, Michael Plog, Tony DiStefano and Fred Scerbo

Bill Barden on How CoCo Stacks Up

The Best Money Can Buy . . .
HDS Floppy Drive Controller Board

Features *
- Gold Plated Edge Cards
- Dual Selectable ROM Sockets
- Compatible with COCO I & II
- 120 Day Warranty
- Double and Single Density

DOUBLE SIDED

Drive 0 Complete	$199.
Drive 1 Complete	$129.
Drive 0 & 1 Dual Drive	$319.

Reduce your I/O errors with the Hard Drive Specialist Floppy Drive Controller for the Color Computer. Gold edge card connectors, advanced design, and the absence of potentiometers make it the best available. Our newest version controller allows the use of either (two 24 pin ROMS), or (one 24 pin and one 28 pin ROM). Using this board with the standard Radio Shack ROM gives you 100% compatibility with all Radio Shack software.

Completed and Tested Board with Radio Shack ROM . . . . . **$99.**
(Includes Case, and DOS Instructions)
Completed and Tested Board without ROM . . . **$79.**
(Includes Case)
Bare Board with Instruction manual . . . . . **$30.**
Parts Kit For Bare Board without ROM . . . . . **$30.**
Radio Shack ROM (current version) . . . . . **$20.**
Radio Shack ROM 1.0 . . . . . **$40.**

ADOS ROM (24 or 28 pin PROM) . . . . . **$40.**

ADOS is a product of SpectroSystems of Miami Florida and is fully supported by the author. The HDS version of ADOS supports 2 drives, 40 track, 6ms trk-to-trk drives only, either Single Sided or Double Sided.

TKBUG Monitor and DOS 1.0 on PROM (24 or 28) . . . . . **$40.**

New, unique CoCo software monitor in ROM designed for a minimum of key strokes and fully compatible with the 1.0 version of disk basic. Features 33 single key commands, allowing the user to quickly display and screen edit RAM in either hex or ASCII format. Also allows the user to dump screen or memory to printer, set break points, alter baud rate, set 64K RAM mode, and more. TKBUG by TOMMY KEETON.

HARD DRIVE SPECIALIST

Ordering Information

Use our WATS line to place your order via Visa, MasterCard, or Wire Transfer. Or mail your payment directly to us. Any non-certified funds will be held until proper clearance is made. COD orders are accepted as well as purchase orders from government agencies. Most items are shipped off the shelf with the exception of hard drive products that are custom built. UPS ground is our standard means of shipping unless otherwise specified. Shipping costs are available upon request.

1-713-480-6000
Order Line 1-800-231-6671
16208 Hickory Knoll
Houston, Texas 77059

From Computer Plus to YOU . . .

PLUS after PLUS after PLUS

Tandy 200 24K $649
Tandy 600 32K $1269
Model 100 24K $349

Color Computer II
w/64K Ext. Basic $145

Tandy 1000 $685
Tandy 1000HD $1539
Tandy 1200HD $1599



DMP-130 $269

Color Computer Disk Drive
Drive 0 $239 Drive 1 $189



DMP-105 $160

BIG SAVINGS ON A FULL COMPLEMENT OF RADIO SHACK COMPUTER PRODUCTS

COMPUTERS

Tandy 1000 1 Drive 128K	685.00
Tandy 1000 HD 10 Meg. 256K	1539.00
Tandy 3000 1 Drive 512K	1969.00
Model IVD 64K with Deskmate	889.00

PRINTERS

Radio Shack DMP-105	160.00
Radio Shack DMP-130	269.00
Radio Shack DMP-430	559.00
Radio Shack DWP-220 Daisy Wheel	469.00
Silver Reed EXP-500P Daisy Wheel	229.00
Star SG-10	245.00
Star SG-15	410.00
Panasonic P-1091	259.00
Panasonic P-1092	339.00
Toshiba 1340	439.00
Okidata 192	375.00
Epson LX-80	275.00
Epson FX-85	419.00

MODEMS

Radio Shack DCM-3 Modem	52.00
Radio Shack DCM-5 Modem	99.00
Radio Shack DC Modem Pac	79.00
Radio Shack DC Modem 2212	315.00

COLOR COMPUTER MISC.

Radio Shack Drive Controller	139.00
Extended Basic Rom Kit	39.95
64K Ram Upgrade Kit	39.00
Radio Shack Deluxe Keyboard Kit	24.95
HJL Keyboard Upgrade Kit	79.95
COCO Max Y Cable	27.95
Color Computer Mouse	44.00
Multi Pack Interface	89.00
Botek Serial to Parallel Conv.	69.95
Radio Shack CCR-81 Recorder	52.00
Radio Shack Deluxe Joystick	26.95
Amdek Color 300 Monitor	265.00
Amdek Video 300 Green Monitor	139.00
Amdek Video 300 Amber Monitor	149.00
Goldstar Amber Monitor	99.00
Radio Shack VM-2 Green Monitor	129.00
Mark Data Universal Video Driver	29.95

COLOR COMPUTER SOFTWARE

	TAPE	DISK
Approach Control Simul.	29.95	34.95
Worlds Of Flight	29.95	32.95
Mustang P-51 Flight Simul.	29.95	34.95
Spectral Typing Tutor	19.95	22.95
Dungeon Quest	24.95	27.95
Major Istar	24.95	27.95
Sam Slueth Private Eye	24.95	27.95
Mark Data Graphic Adven.	24.95	27.95
COCO Util by Mark Data		29.95
COCO Max by Colorware	69.95	
COCO Max II by Colorware		79.95
AutoTerm by PXE Computing	39.95	49.95
TelePatch by Spectrum		19.95
TeleWriter 64	49.95	59.95
Deft Pascal Workbench		89.95
Deft Extra		39.95
Pro Color File Enhanced 2.0		59.95
Max Edit by Derringer		19.95
Elite Calc	69.95	69.95
Elite Word	69.95	69.95
Elite File (disk only)		74.50
DynaCalc (disk only)		99.95
Word Pack II by PBJ		134.95
VIP Writer (tape & disk)		69.95
VIP Integrated Library (disk)		149.95

Order any 2 software pieces listed and take 10% off their listed price.
All Radio Shack software 10% off list.
Send for complete list.

CALL TOLL FREE
1-800-343-8124

- *LOWEST POSSIBLE PRICES*
- *BEST POSSIBLE WARRANTY*
- *KNOWLEDGEABLE SALES STAFF*
- *TIMELY DELIVERY*
- *SHOPPING CONVENIENCE*

VISA AMERICAN EXPRESS MasterCard

computer plus

P.O. Box 1094
480 King Street
Littleton, MA 01460

SINCE 1973

IN MASSACHUSETTS CALL (617) 486-3193

TRS-80 is a registered trademark of Tandy Corp.

Under The RAINBOW

18

26

122

FEATURES

Menace of the Sandworm/*Peter Meyers* ____ 18
GAME *Miners on Dune fight the vile sandworms*

CoCo Fried Chips/*Marty Goodman* ____ 24
HARDWARE PROJECT *Repair tips for burned-out controllers*

Adventure Processor/*Bill Cook* ____ 26
PROGRAMMING UTILITY *Take the tedium out of Adventure writing*

Tic Tac CoCo/*James W. Wood* ____ 36
GAME *Updating an old favorite with a twist*

NymMatch/*Brien Dick* ____ 40
GAME *Encouraging mastery of word concepts*

Starlord/*Raju Dash* ____ 58
GAME *Test your skill and daring by fighting the evil tyrant*

Esch-A-Sketch/*Eric White* ____ 75
GRAPHICS *An easy way to create self-perpetuating patterns*

Fun and Foolery/*CoCo Lovers* ____ 79
GAME SHORTIES *Five games to amuse plus two programming utilities*

How Does the CoCo Stack Up?/*William Barden, Jr.* ____ 90
COMMENTARY *Comparing the CoCo to other computers*

The Old Switcheroo/*Mark Haverstock* ____ 108
HARDWARE PROJECT *Three devices on one joystick port*

The Quick Joystick Fix/*Bruce W. Goshorn* ____ 116
HARDWARE PROJECT *Make joystick firebuttons electrically parallel*

Eye of the Tiger/*Tim Jones* ____ 122
GAME *Rocky beware — CoCo is here!*

Fortune Wheel/*Arron Branigan* ____ 156
GAME *A challenging game for the whole family*

What's Inside a Mouse?/*Steve Bjork* ____ 180
MOUSE UTILITY *Detailing the point-and-pick interface*

Cover illustration copyright © 1986 by Fred Crawford

The small cassette tape symbols beside features and regular columns indicate that the program listings with those articles are on this month's RAINBOW ON TAPE, ready to CLOAD and RUN. For full details, check our RAINBOW ON TAPE ad on Page 133.

NEXT MONTH: Sharpen your pencils and put on the old thinking cap because school days are just around the corner! Along with new shoes and lunch boxes, September also brings the RAINBOW Education issue. Keeping abreast of current thinking is important in today's fast-paced world and THE RAINBOW is here to help.

We'll have educational features for all ages — from preschoolers to graduate students and beyond. Even old pros will discover many things of interest in THE RAINBOW's regular columns, reviews and utilities. Technology never stops and neither should your education. Come to *the* premier information source for the Color Computer, THE RAINBOW, and be in the know.

COLUMNS

BASIC Training/*Joseph Kolar* — 48
Uncomplicating translating

Building August's Rainbow/*Jim Reed* — 16
Managing Editor's comments

CoCo Consultations/*Marty Goodman* — 178
Introducing a new Rainbow Column

Delphi Bureau/*Cray Augsburg* — 174
Using the CoCo SIG and Marty Goodman's database report

Education Notes/*Steve Blyn* — 94
Exploring the card catalog

Education Overview/*Michael Plog, Ph.D.* — 97
Looking at the 'hidden' computers

PRINT#-2,/*Lawrence C. Falk* — 12
Editor's notes

Turn of the Screw/*Tony DiStefano* — 101
Timing and the SAM chip

Wishing Well/*Fred B. Scerbo* — 167
Computer-paced learning

RAINBOWTECH

Accessible Applications/*Richard White* — 194
Getting in touch with PenPal

Barden's Buffer/*William Barden, Jr.* — 188
More interfacing tricks for assembly language and BASIC

Downloads/*Dan Downard* — 186
Answers to your technical questions

KISSable OS-9/*Dale L. Puckett* — 197
Experimenting with RAM disks

DEPARTMENTS

Advertiser Index — 208
Back Issue Information — 139
CoCo Cat — 134
CoCo Gallery — 114
Corrections — 98
The Crossword Creator Contest — 183
Letters to Rainbow — 6
The Pipeline — 104
One-Liner Contest Information — 156
Received & Certified — 131
Reviewing Reviews — 132
Scoreboard — 86
Scoreboard Pointers — 88
Submitting Material to Rainbow — 66
Subscription Information — 56
These Fine Stores — 206

PRODUCT REVIEWS

Product Review Contents — 129

The RAINBOW

August 1986 Vol. VI No. 1

Editor and Publisher
Lawrence C. Falk

Managing Editor James E. Reed
Senior Editor Tamara Renee Dunn
Submissions Editor Jutta Kapfhammer
Copy Editor Jo Anna Wittman Arnott
Reviews Editor Judi Hutchinson
Editorial Assistants Judy Brashear, Wendy Falk, Jody Gilbert, Angela Kapfhammer, Shirley Morgan
Technical Editor Dan Downard
Technical Assistants Cray Augsburg, Chris Wehner
Contributing Editors William Barden, Jr., Steve Blyn, Tony DiStefano, Joseph Kolar, Michael Plog, Dale Puckett, Fred Scerbo, Richard White
Consulting Editors Ed Ellers, Danny Humphress, Belinda C. Kirby, T. Kevin Nickols

Art Director Jerry McKiernan
Designers Tracey Jones, Heidi Maxedon, Kevin Quiggins, Sandra Underwood
Production Assistant Cynthia L. Jett

Chief of Typography Debbie Hartley
Typography Services Jody Doyle, Suzanne Benish Kurowsky

Falsoft, Inc.
President Lawrence C. Falk

General Manager Patricia H. Hirsch
Asst. General Mgr. for Finance Donna Shuck
Admin. Asst. to the Publisher Sue E. Rodgers

Editorial Director James E. Reed
Asst. Editorial Director Jutta Kapfhammer
Creative Director Jerry McKiernan

Chief Bookkeeper Diane Moore
Advertising Accounts Beverly Taylor
Dealer Accounts Judy Quashnock
Accounts Payable/ADP Lisa Ragan
Fulfillment Services Director Bonnie Frowenfeld
Fulfillment Services Asst. Dir. Sandy Apple
Asst. Customer Service Mgr. Beverly Bearden
Word Processor Manager Patricia Eaton
Coordinator of Development Ira Barsky
Chief of Printing Services Melba Smith
Pre-press Production John Pike
Dispatch Janice Eastburn
Asst. Dispatch Mark Herndon
Business Assistants Laurie Falk, Sharon Smith, Monica Wheat, Pam Workhoven

Advertising Coordinator Doris Taylor
Advertising Representative Kim Vincent
Advertising Assistant Debbie Baxter
(502) 228-4492

West Coast Advertising and Marketing Office
Director Cindy J. Shackleford
Advertising Representative Shirley Duranseau
For RAINBOW Advertising and Marketing Office Information, see Page 208

THE RAINBOW is published every month of the year by FALSOFT, Inc., The Falsoft Building, 9509 U.S. Highway 42, P.O. Box 385, Prospect, KY 40059, phone (502) 228-4492. **THE RAINBOW, RAINBOWfest** and **THE RAINBOW** and **RAINBOWfest** logotypes are registered ® trademarks of FALSOFT, Inc. • Second class postage paid P[rospect], KY and additional offices. USPS N. 705-050 (ISSN No. 0746-4797). POSTMASTER: Send address changes to **THE RAINBOW**, P.O. Box 385, Prospect, KY 400[59]. Postage Guaranteed. Authorized as second class postage paid from Hamilton, Ontario by Canada Post, Ottawa, Ontario, Canada. • Entire con[tents] FALSOFT, Inc., 1986. **THE RAINBOW** is intended for the private use and pleasure of its subscribers and purchasers and reproduction by any [means] of information herein is for the single end use of purchasers and any other use is expressly prohibited. All programs herein are distributed in[as is] warranty of any kind whatsoever. • Tandy, Color BASIC, Extended Color BASIC and Program Pak are registered ® trademarks of the Tandy Corp. Co[mpuServe] ® trademark of CompuServe Inc. • Subscriptions to **THE RAINBOW** are $31 per year in the United States. Canadian rates are U.S. $38. Surface is U.S. $68, air mail U.S. $103. All subscriptions begin with next available issue. • Limited back issues are available. Please see notice for issu[es] their costs. Payment accepted by VISA, MasterCard, American Express, cash, check or money order in U.S. currency only. Full refund after n[o] refund of 10/12ths the subscription amount after two issues are mailed. No refund after mailing of three or more magazines.

Software Thieves (Not Pirates)!

Editor:

This letter is to all the software thieves who are passing around a broken version of *CBASIC V1.01*. It was discovered some time ago that this version of *CBASIC* was available on BBSs around the country. When I downloaded a copy, I was quite upset. I spent over two years writing this program only to find some thieves had stolen it and were freely giving away copies. What gives you the right to take two years of my work and give it away or use it without my consent? Not only have you taken something that does not belong to you, you have also given *CBASIC* a bad name. The copies you are giving away are not even near the current version (V1.12) that has a large number of additional commands, functions and improvements. Not only that, but the stolen version has many commands and features that no longer work after it was broken.

Some of you even have the nerve to demonstrate it at computer club meetings and discourage people who are considering purchasing *CBASIC*. Then there are those who have acquired the stolen version and have the nerve to call us up and ask us why something doesn't work.

Through greed or the desire to be the center of attraction in the local CoCo Community, you have succeeded in killing the best Color BASIC compiler on the market. You have also succeeded in cutting our sales of *CBASIC* by over 50 percent. We can no longer afford to run our current advertisement since we no longer sell enough copies to pay for it. I have to wonder, is it worth it to continue to improve and enhance *CBASIC* if I can't afford to pay for the advertising? It also makes me realize that it is not worth the time or effort to even attempt to work on another program as complete or complex as *CBASIC* for the Color Computer.

Bill Vergona
Cer-Comp
Las Vegas, NV

BACK TALK

Editor:

May I offer some suggestions in response to Kyle Johnson's query in the June 1986 issue [Page 8] regarding genealogy programs for a 64K Color Computer 2.

Prickly-Pear regularly advertises a *Family-Tree* program in RAINBOW magazine. Another tape program I have found to be much more complete and usable on disk is *Lineages*, prepared and sold by Ervin A. Madera, P.O. Box 1746, Rohnert Park, CA 94928-1241 for $35.

Allen R. Streeter
Saginaw, MI

Incorporating Print Styles

Editor:

In response to the question from Jerry Dummer in the June 1986 issue [Page 9], he asked how to incorporate various styles of print (which his printer will print) within *Color Scripsit*. I substitute the codes for whatever character font I want to print in place of the codes Underline and Elongate in Option 7 on the main menu.

I hope this will be of help; your magazine has certainly been a great help to me.

Lloyd O. Billings
Seattle, WA

VIP Defended

Editor:

I take respectful difference with Richard White for his statement in your May 1986 issue that *VIP Writer* might qualify as user hostile compared with other offerings. *VIP* is a powerful, elegantly programmed, and very intuitive and logical word processing package, with programmed-in and programmable printer controls that are beyond belief. The kingdom of MS-DOS should have a package as powerful and practical! Neither *WordStar* or *PC WRITE* can touch *VIP* for convenience and transparency.

I am a registered owner of *Telewriter-64* as well as *VIP*, and I have a lot of respect for it. I don't doubt that you're right, Dan (May 1986, Page 217): *Telewriter-64* is probably the most widely used word processor for the CoCo; it's a fine package and it's been around a long time. But for my big writing projects I invariably reach for *VIP*. The recent patches for *Telewriter-64* have added a lot to the original, but they give it features that *VIP* has as standard equipment.

A *VIP* users' group was recently formed. Interested persons can write me at Box 194, 01463. Hints, brief articles, letters, *VIP* database formats and CALC templates are gratefully received. There are no set dues, but contributions to defray the cost of copying and mailing the quarterly newsletter are most welcome.

John Ogasapian
Pepperell, MA

Transformation Troubles

Editor:

In the June 1986 issue, Marty Goodman's article, "The Great Transformation" [Page 182] and associated programs are very good and fill a substantial need. It is indicative of the quality software available in THE RAINBOW.

One problem is the interface between *VIP Writer* and several MS-DOS word processors. *Display Writer 3* and *WordStar* are two MS-DOS word processors I have used and both insert a carriage return at the end of every line. On the other hand, *VIP Writer* inserts a carriage return only at the end of a paragraph (a forced line feed). Thus an ASCII file from *Display Writer 3* or *Word Star* used with *VIP Writer* produces a double-spaced output.

The problem becomes more serious when sending ASCII files from *VIP Writer* to *Display Writer 3* or *Word Star*. The MS-DOS software expects a carriage return after every line and without them treats the entire paragraph as one long sentence. It seems that these problems are eliminated if

TOP RATINGS
HOT COCO MAGAZINE
SEPTEMBER 1984 AND MAY 1985

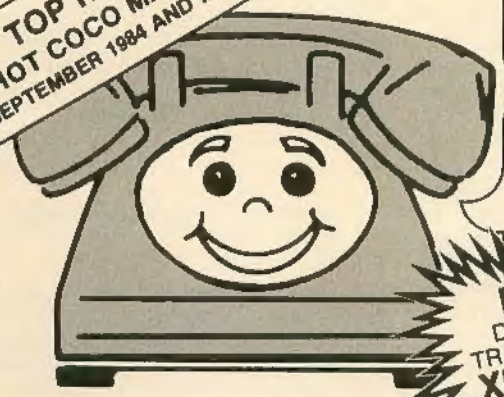

YOU COULD FALL IN LOVE WITH

AUTOTERM!

IT TURNS YOUR COLOR COMPUTER INTO THE

WORLD'S SMARTEST TERMINAL

NEW DISK FILE TRANSFER VIA XMODEM

AND MOST LOVABLE

GOOD LOOKIN'

AUTOTERM shows true upper/lower case in screen widths of 32, 40, 42, 51, or 64 characters with no split words. The width of 32 has extra large letters. Scrolling is forward, backward, and fast. Block graphics pictures are displayed automatically and can be scrolled.

The screen's top line shows operating mode, unused memory size, memory on/off, and caps-lock on/off. It also gives helpful prompts.

SWEET TALKIN'

KEY-BEEP can be on/off. Unacceptable keystrokes cause a lower pitched BOP! This ERROR-BEEBOP can be on/off.

Talks to other computers with Full or Half Duplex; Baud Rate of 110, 150, 300, 600, 1200; Parity as even, odd, mark, space, none; 7 or 8 bit Word; any Stop Bits; all 128 ASCII characters; true line Break; XON/XOFF protocol; and optional line-at-a-time transmission. Able to send and receive text, block graphics, BASIC and ML programs. A 64K machine holds up to 45,000 characters (33,300 in HI-RES).

DUAL PROCESSING lets you review & edit while more data is coming in.

XMODEM for disk file transfer. Fully supports D.C. Hayes and other intelligent modems.

Talks to your printer with any page size, margins, line spacing, split word avoidance. Embed your printer's control sequences for boldface, underlining, etc. Narrow text can be automatically spread out.

You'll also use Autoterm for simple word processing and record keeping

You can display directories, delete files, transmit directly from disk, and work with files larger than memory. Easily maintain a disk copy of an entire session.

Compatible with TELEWRITER (ASCII) & other word processors.

SMOOTH WALKIN'

AUTOTERM moves smoothly and quickly between word processing and intelligent terminal action. Create text, correct your typing errors; then connect to the other computer, upload your text, download information, file it, and sign-off; then edit the received data, print it in an attractive format, and/or save it on file.

Editing is super simple with the cursor. Find strings instantly, too! Any operating parameter, such as screen width, can be altered at any time. Uncompleted commands can be cancelled.

PUTTY IN YOUR HANDS

The word processor can be used to create, print, and/or save on file your personal KSMs. They let AUTOTERM act like you. For example, it can dial through your modem, sign-on, interact, perform file operations, & sign-off; an entire session without your help. KSMs can answer the *phone*, prompt the caller, take messages, save them, hang-up, and wait for the next call. The KSM potential is unbelievable!

NO OTHER COMPUTER IN THE WORLD CAN MATCH YOUR COCO'S AUTOMATIC TERMINAL CAPABILITIES!!!

WHAT THE REVIEWERS SAY

"AUTOTERM is the Best of Class."
Graham, *RAINBOW*, 6/83

"The AUTOTERM buffer system is the most sophisticated — and one of the easiest to use..."
Banta, *HOT CoCo*, 9/84

"Almost a full featured word processor..."
Ellers, *RAINBOW*, 11/84

"AUTOTERM's excellent error-handling routines, thorough documentation, and logical, easy-to-use command structure make it stand out."
Parker, *HOT CoCo*, 5/85

AVAILABLE IN CANADA
from
Kelly Software Distributors
Edmonton, Alberta

CASSETTE $39.95
DISKETTE $49.95
Add $3 shipping and handling
MC/VISA/C.O.D.

PXE Computing
11 Vicksburg Lane
Richardson, Texas 75080
214/699-7273

Please hire the mentally retarded. They are sincere, hard working and appreciative. *Thanks!* *Phyllis.*

Telewriter-64 is used since it inserts carriage returns at the end of each line.

If anyone has a simple solution to this problem, I'm sure it would be appreciated by the many *VIP Writer* users.

Ronald Pettus
St. Charles, MO

Assessing the Assessment

Editor:

I must take exception to the article by Harry Hallstrom entitled "Assessing the Market Value of Your Home," April 1986 [Page 79]. While Mr. Hallstrom's program seems well-written and well-intentioned, it *does not* assess the fair market value. I can understand his bewilderment after talking with three real estate agents who were obviously lacking in training. Without facts to back up their "market value," it is no wonder they came up with a $20,000 range.

On the other hand, Mr. Hallstrom's method neglects changes in the buying market, availability and type of financing, changes in the neighborhood, conformity within the neighborhood, condition, area amenities and more. In addition, improvements rarely increase the value as much as they cost.

Your readers would be best advised to base their asking price on information from comparable sales and competitive properties. If you live in a small town with no multiple listing service and only local real estate companies, go ahead and order a FNMA appraisal. The cost of the appraisal is small when compared to the frustration of an extended marketing time and false expectations.

Roger A. Knauff
Montgomery, AL

HINTS AND TIPS

Editor:

Users of "Name That Tune" (June 1986, Page 66) will experience problems with the firebuttons regardless of the computer they use. PEEK(65280) gives a number in the 100s or 200s depending on JOYSTK(0). To correct this problem, make the following changes in the program:

```
5100 P=PEEK(65280) AND 3
```

In lines 5110, 5120 and 5135, substitute 2 for 254 and 1 for 253.

Bruce Lewis
Maryville, MO

The substitution will work — and it will work on both CoCos regardless of what set of numbers your firebuttons produce. However, it also involves one more function to be performed (computing the logical AND on P) in a spot where there is really no time to spare. Hence, the joysticks become a little less sensitive and the music moves a little slower.

Marge Rutter
Program Author

Ring Quest Reincarnation

Editor:

I enjoy your magazine and the Second Adventures tape and would like to pass along a hint for the Adventures tape. In *Ring Quest*, to make it so you cannot die, make 340 GOTO 354. This reincarnates you with a loss of hit points totaling the number the monster killed you with, but at least you get to finish the game. This is great for searching rooms.

Mike Farmer
Ellensburg, WA

REQUEST HOTLINE

Editor:

I own a grain crop farming operation and would like to know what companies have farming business software available for the CoCo. Write me at RR 1, Box 301A, 46176.

Scott Newkirk
Shelbyville, IN

And the Beat Goes On

Editor:

I am looking for a program to allow the CoCo to perform as a metronome. I run a recording studio in Nashville and would like to use it for my studio work. Can anyone help me? My address is 300 Rural Hill Ct., 37217.

Michael Bridges
Nashville, TN

Mailing List Merger

Editor:

Is there any way to merge a mailing list created by a BASIC program to *Telewriter-64*? My address is 133-01 Sanford Avenue, 11355.

Tho Luong
Flushing, NY

Data Sheet Dearth

Editor:

I would like to know if anyone knows where I can obtain the 1793 FDC data sheet (Floppy Disk Controller) by Western Digital Corporation. I need an address and telephone number please. Write to me at 834 Third Street, G8P 1P6.

Claude Gosselin
Chibougamau, Quebec

Domestic Requests

Editor:

Kudos to Scott Halfman for his *Castle of Doom* program (June 1986 issue, Page 26). This is by far one of the best BASIC game programs for the CoCo I have ever seen.

I need help finding a couple of programs. First, I am looking for a program to help my wife lay out cross stitch patterns on all sizes of material. Second, I am looking for a program that will teach shorthand. Any help would be appreciated. I can be reached at RR 2, Box 85-A, 47882.

Scott Lampton
Sullivan, IN

Brother, Can You Spare a Program?

Editor:

I am secretary of a bowling league and need a program that will enable me to keep up-to-date records of individual averages, etc. Does anyone know of one? Write to me at 195 Lynnfield Street, 01960.

John C. Groz
Peabody, MA

Knitting Calculations Needed

Editor:

My wife has a knitting machine and I have a 64K Color Computer, Radio Shack disk drive and a printer. I would appreciate any information on programs available concerning knitting machine calculations. Any information can be sent to me at 2341 Floyd Drive, 53404.

James E. Johnson
Racine, WI

See the Sugar Software ad on Page 80 in the May 1986 issue. They have a program called CoCo Knitter. *It was also reviewed in the same issue (Page 195).*

Diet Diagnostic

Editor:

Do you know of a nutrition and disease program for the Color Computer 64K for use with organic diseases, diet, vitamins, symptoms, dates, hours, etc. My address is 4617 Girard Avenue No., 55412.

Wilma Bisted
Minneapolis, MN

The October 1985 issue, Page 213, has a review of a program by Homesoft called Nutriguide. *This may be what you are looking for.*

Rabbit Relations

Editor:

I was recently approached by several friends who are involved with rabbit breeding. We are looking for a program to compile information on rabbits for ease of record-keeping. It would be similar to a genealogy program. Has anyone seen or heard of such a program? I would appreciate hearing from anyone on this subject. I can be reached at P.O. Box 775, 70664-0775.

Morgan J. Maynard
Sulphur, LA

DELPHI LINE

Editor:

OS-9, to me, means incompatability with all of my files that are in Extended Disk BASIC format. What would I need OS-9 for? Everything I ever use is in the normal format. Why are there only hard drive drivers for OS-9? It would be a great idea to use a hard drive in place of a floppy! Then I would have faster data I/O and lots more space.

I could put *CoCo Max II* and *VIP Writer*

on it, etc. I know this would be possible if I could get a software driver that would drive a hard drive from Disk BASIC just like a floppy but with the plusses of a hard drive. More people would use hard drives because they wouldn't have to learn another operating system and wouldn't have incompatability with their existing programs. Does anyone know where I can get a hard drive driver for Extended Disk BASIC? If so, please write to me at 125 Kelmar Avenue, 19355.

Ted Matthews
Frazer, PA

You might check our advertisers such as Owl-Ware.

INFORMATION PLEASE

Editor:

Does anyone have a device driver and a device descriptor for using the Radio Shack X-pad under OS-9, or a program to use and define the four special function keys on most CoCo replacement keyboards for use under OS-9, or an OS-9 sound program, or an OS-9 key click program? My address is P.O. Box 506, 83221.

Robert Parsons
Blackfoot, ID

Game Quest

Editor:

I am looking for a jet combat simulator for the TRS-80. There are two available for the Commodore 64 right now.

Also, I would like to know where I could get the game *P-51*. My address is 3447 Dempsey Road, 43081.

Kevin Burton
Westerville, OH

You can purchase the game from Tom Mix Software.

In Search of Rainboard

Editor:

Can you please tell me in which issues of RAINBOW the "Rainboard BBS" appeared. I also want to thank all the people who make THE RAINBOW what it is.

Nick Barnes
Waterbury, CT

"Rainboard" by Lane Lester appeared on Page 44 of the November 1984 issue. Also see "Supreme SysOp and Magnificent Modem Master" on Page 20 of the November 1983 issue.

Speechless

Editor:

I have purchased the *Super Voice Cartridge* along with the *Translator* from Speech Systems. After reading instructions and running sample programs it works fine, but when I try it with other programs that ask if I have a speech cartridge and I say yes, it doesn't work. I have tried it with several Radio Shack programs and on *Gold Runner* from Tom Mix and it won't work with any of these programs. I would like to know if there is a program or a way to get the *Super Voice Cartridge* to work with these programs. If anyone can help, please write me at P.O. Box 8522 LRS, 77711.

Thank you for Delphi, it is:

D elightful
E ntertaining
L ovable
P owerful
H elpful
I nspiring

Gene Darby
Lumberton, TX

The other programs you are using are designed for the Radio Shack Speech/Sound Cartridge.

CoCo Confusion

Editor:

I have a 64K CoCo. I received my May 1986 RAINBOW and looked through it. In the "Received & Certified" column I saw the Infocom games. I noticed it said the games were for the CoCo 2. I know that the CoCo 2's POKE locations are different. Can I use it on my CoCo? If not, are they going to come out with one for the CoCo 1?

Ryan Smith
Placerville, CA

The Infocom routines require the DOS command to boot. They have, however, loaded on our older CoCos when we used the OS-9 boot routine to run them.

Take It All Off?

Editor:

Is it OK to turn off all the computer equipment at the power strip, or should I continue to turn off everything individually?

RAINBOWfest at Palo Alto was great. Not only were there great bargains at the booths, the seminars we attended were good — especially the Steve Bjork seminar. We also attended Dale Puckett's OS-9 seminar and bought his book. Keep up the good work, and please come back out our way soon.

Sonya J. Hurst
Richmond, CA

Although it is not recommended by Radio Shack, it has worked without detriment to the equipment.

Documentation Dilemma

Editor:

I recently purchased a Centronics Model 308 printer for $50. I knew it was used when I got it and expected it would not be in good shape, but I was wrong. The problem is I have no documentation on it. If anyone has documentation please send me a copy of it or tell me where I could get it. My address is P.O. Box 56, 67103.

Brian Daily
Mayfield, KS

Packet BBS

Editor:

Have any radio amateurs found or constructed a packet bulletin board program or message recorder/transmittal program for the CoCo in conjunction with two-meter packet radio? I have experimented with the *Autoterm* program (building keystroke multipliers section), but the AEA PK=80 packet controller will not access these commands when a station calls my station. Any suggestions would be appreciated. My address is 19 New York Avenue, 08735.

Harry Warren W2SAD
Lavallette, NJ

BOUQUETS

Editor:

I was pleasantly surprised to receive a software update disk from one of your advertisers, Micro Works. I had purchased the DS69A Digitizer and C-See software, and had found it to be a good product. Apparently Micro Works found a bug, and without any complaint from me, sent a new version of their software. Your readers should know that they are concerned for their customers.

Terry A. Jackson
Lombard, IL

Editor:

I would like to publicly thank the people at Frank Hogg Laboratory for the courteous and prompt service I received. I recently ordered some merchandise and am very pleased. The person who took my order explained what each piece would need to work properly on my system and answered all my questions. Half of the order arrived in two days. One piece had to be back ordered and it came in just four days. All of this, plus fair prices, make FHL a company for the CoCo Community.

Jim Martin
Indianapolis, IN

Editor:

I enjoy getting THE RAINBOW and the main reason is because of your great range of advertisements and great departments, like "CoCo Gallery." It was in THE RAINBOW that I came across Dayton Associates; they have given me good, fast service and I haven't had a problem yet.

Mike Jovanovic
Chicago, IL

Editor:

I would like to thank Bob Rosen of Spectrum Projects for his assistance in getting my Mark Data Products Universal Video Driver to work. I contacted Bob Rosen and explained my problem. He immediately resolved it.

Bill Stephan
Massapequa, NY

KUDOS

Editor:

I feel highly honored to have a piece of

The Ultimate Color Computer

Enhancements for Productivity from HJL Products

To achieve maximum productivity with your Color Computer, you have to make it as easy as possible to get information into and out of the system.

This is why we developed the HJL family of high-performance enhancements for ALL MODELS of the Color Computer.

The Keyboard - $79.95
The overwhelming favorite of serious Color Computer users worldwide, the HJL-57 keyboard has the smooth, consistent feel and reliability you need for maximum speed with minimum input errors. Includes 4 Function Keys and sample function key program. Installs in just a few minutes with no soldering.

The Numeric Keypad - $89.95
The NumberJack is a self-contained, cable-connected keypad for heavy-duty number-crunchers. Besides the number keys, it has all the cursors, symbols and math keys, including autoshifted (one-touch) ADD and MULTIPLY. Comes complete with 3-foot cable and all necessary connectors for quick and easy installation without soldering.

The Monitor Adapter - $25.95
This universal driver works with all monochrome monitors, and is easily installed without clips, jumpers or soldering (except in some later CoCo 2s with soldered-in video chips). Here's crisp, clear, flicker-free monitor output with all the reliability you've come to expect from HJL Products.

The Monitor - $89.95
The GoldStar high-resolution amber monitor brings you the monochrome display that's preferred by most computer professionals today. Once you've used it you'll never connect your computer to a TV set again. The 12-inch diagonal CRT has an etched non-glare faceplate. (Requires adapter sold below)

The BASIC Utility - $25.95
Quick Basic Plus, a high-performance programming utility, can be used with any color computer that has four function keys. 26 pre-defined BASIC statements, 10 user-defined macros at a time (you can save as many sets of macros as you like), automatic line-numbering, word wrap, global search, and instant screen dump to printer, make this software the BASIC programmer's dream come true. Comes with re-legendable 3-way reference chart. Specify disk or cassette.

The HJL Warranty
Every HJL product comes with a full, one-year warranty and the exclusive HJL 15-day unconditional guarantee (except software).

Pick a Pair & Save 15%
Now, for a limited time, we'll give you 15% off the price of any two or more products shown here. Just mention this ad when you order.

Call Now, Toll Free

1-800-828-6968

In New York 1-800-462-4891
International calls: 716-235-8358

HJL PRODUCTS
Div. of Touchstone Technology Inc.

955 Buffalo Road • P.O. Box 24954
Rochester, New York 14624

Ordering Information: Specify model (Original, F-version, or CoCo 2 Model Number). Payment by C.O.D., check, MasterCard, or Visa. Credit card customers include complete card number and expiration date. Add $2.00 for shipping, 3.50 to Canada; except monitors (call for shipping charges before ordering monitors). New York state residents add 7% sales tax. **Dealer inquiries invited**

my work published in "CoCo Gallery." I consider THE RAINBOW to be the finest computer magazine published today. Your interesting and intelligently edited magazine has had a lot to do with the success of our beloved CoCo.

Merwyn Bly
Vienna, VA

Missing Address

Editor:

A gentleman phoned me with a question about my *IRA Estimator* (April 1986, Page 70). I promised to send him a cassette to compare with his typed-in listing, but I lost his name and address. He is from either Maryland or Virginia. Please send me your address again. Your tape is ready.

Bruce W. Ronald
Dayton, OH

How about a 'Wishing Well'

Editor:

I would like to see in RAINBOW a section entitled "Programs I Wish Somebody Would Write." Readers could write in about a program of their particular interest that might be of interest to many others with the same need. I personally have use for more business and science software rather than games. It would be great if someone could write a program for CoCo on linear programming or a graphics break-even analysis program. I would purchase these kinds of programs, but nowhere are they written for the Color Computer.

Ron F. Pfeiffer
Cuyahoga Falls, OH

Where have you been? Fred B. Scerbo, a contributing editor, has been writing the "Wishing Well" column since March 1984. He is receptive to all readers' requests and ideas — you should drop him a line.

BULLETIN BOARD SYSTEMS

Editor:

The Pub BBS of Chandler has moved to Mesa and has a new telephone number: (602) 844-7840. The system is running 24 hours a day under OS-9 with PBBS 4.0 software using a 64K CoCo with multipack, 80-column card, hardware clock and three 80-track, double-sided drives. We support 300 and 1200 Baud. No password is required. There are six download subdirectories for text, OS-9, Model 100, CoCo and graphics. The Pub has been running for nearly two years. Please stop by and see us sometime.

Steve Roberson
Mesa, AZ

• I would like to announce the new L.A. Color Users Board BBS system. It is running the Colorama software at 300 Baud and has five download sections, magazine, gallery, message base and much more. We are up 24 hours a day. The number is (213) 773-3024. To be guaranteed full access after the first call, send a post card to 4740 E. Florence, #1, 90201.

Bill Gordon
Bell, CA

• I am pleased to announce that the Star Trek BBS is online 24 hours a day, seven days a week. This system runs on a CoCo 2 with two DSDD (disk) drives. The board has online games, downloading (XMODEM), chat with Capt. Kirk and more. Phone (203) 822-8176.

Bruce Bouley
Norwick, CT

• I have a 64K CoCo 2 with one disk drive, printer and 300 Baud modem. My number is (315) 549-2501 or if anyone knows of a BBS in my area please call or write. My address is 5418 Rt. 89, 14541.

Drew Hammond
Romulus, NY

• For the benefit of the CoCo Community, I have listed some local BBSs in the Yonkers and Bronxville area that support the Color Computer:

Westchester #1, 300-1200 Baud, 24 hours a day, seven days a week, TBBS system. Phone (914) 965-2355, Bill Graspo, SysOp.

Lexicon BBS (formerly WCHR BBS), 300-2400 Baud, 24 hours a day, seven days a week, TBBS system. Phone (914) 776-2424.

System 80, 300-1200 Baud, 24 hours a day, seven days a week. Phone (914) 793-5408, Steve Brundale, SysOp.

Capraselli, 300-1200 Baud, 24 hours a day, seven days a week, TBBS system. Phone (914) 699-8186.

M&M Public BBS, 300-1200 Baud, 24 hours a day, seven days a week, TBBS system. Phone (914) 738-6857.

TBBS of Yonkers (formerly the Undersea Kingdom of Golden Bridges), 300-1200 Baud, 24 hours a day, seven days a week, TBBS system. Phone (914) 964-8845, Mike Sebar, SysOp.

I hope this encourages more CoCo nuts to participate in the growing world of telecommunications!

S.A. Borbas
Yonkers, NY

• The Peninsula CoCo Board, which has been online since May 1984, now supports up/downloads, mail section, public messages, a D&D section, private messages and SIGs for Commodore, Atari, CoCo, Apple and MS-DOS machines. The BBS is operated on a 64K CoCo with 1.8 megs of online storage program in CoBBS and supports 300 or 1200 Baud. Parameters are 8, 1 & N only. Phone (804) 868-0922. Passwords are usually approved within 24 hours. Security is strict and only public domain programs are allowed. Runs 24 hours daily, seven days a week, except when SysOp is playing.

Bill Satterwhite
Tabb, VA

• I would like to announce the formation of CoCo Beach. It runs on a Colorama BBS system with multilevel access, online games and more. Call (206) 432-2512. Jeff Gill, SysOp.

Brian Wright
Seattle, WA

LATE NIGHT RATES ON DELPHI

If all goes as planned, by the time you read this, Delphi will have instituted summer Late Night Rates!

The way it works is that, during the late night/early morning hours, users will receive one free minute for every 10 minutes used, amounting to a 10% discount

The Late Night Rates are to be in effect during July and August and apply to connect time between 2 a.m. system time (Eastern Daylight Time) and 7 a.m. local node time (the time at your end). For Eastern U.S. users this is a five-hour period but for those on Pacific Time, this is an eight-hour period since Late Night Rates apply from 2 a.m. *system* time to 7 a.m. *local* time.

An added bonus to Late Night Rates is that many of THE RAINBOW authors and editors choose to be on our CoCo SIG during this period anyway!

THE RAINBOW welcomes letters to the editors. Mail should be addressed to: Letters to Rainbow, The Falsoft Building, P.O. Box 385, Prospect, KY 40059. Letters should include the writer's full name and address. Letters may be edited for purposes of clarity or space.

Letters to the editors may also be sent to us through the MAIL section of our Delphi CoCo SIG. From the CoCo SIG> prompt, pick MAIL, then type SEND and address to: EDITORS. Be sure to include your complete name and address.

ARTS AND LETTERS

Sonya and Ken Hurst
Richmond, CA

A Down Home Invitation

Our Anniversary Issue is history now and we've already received more notes, letters and cards about it than anything we've done in a long time. As things work through the editorial department, we'll print a representative number of your comments in our letters column.

Just about everyone had nice things to say, and all I can say is "thank you!" We're glad you consider THE RAINBOW to be "your" magazine just as you consider the CoCo to be "your" computer. It makes it a whole lot more fun to be a part of the CoCo Community when you know everyone is so positive about it.

Maybe the special section on the people who do THE RAINBOW whetted a few appetites, or maybe it is just because summer is coming and it's time to "hit the road" for vacation. Whatever the reason, we're getting a whole lot of requests for tours of the Falsoft Building for this summer.

If you've already written to us about that, you know who to contact. But if you happen to be near Prospect and would like to stop by, you can arrange for a tour by writing or calling Ira Barsky, who is in charge of our development program. Call or write Ira at our regular address and, if at all possible, we'll be happy to have you. I'm sorry, but we can only do this Monday through Friday during regular office hours (9 a.m. - 5 p.m.).

* * *

Speaking of Ira, our newest employee, reminds me to talk about RAINBOWfest, which is also under his aegis.

The Chicago show this year was a resounding success, but proved to me that I should let well enough alone.

One of the biggest complaints we've always heard about RAINBOWfest is that the aisles are too small and there is not enough room to walk around easily. In Chicago this year we took some extra space to make the aisles wider. And what happened? The main response I got was that "the show seems smaller than last year."

Actually, the Chicago RAINBOWfest had a slight increase in attendance from last year (and were there some bargains to be had!), but it *did* seem smaller because there was so much extra room.

Don't expect that to happen again. After telling several hundred people that the show was running the same, attendance-wise, I decided that we'll forgo the bigger aisles from now on.

The California show, right now, is in doubt.

The California show has always been our smallest — at least 2,000 less than the other two — and has always been the most expensive to produce. Part of that is because of the great distance we have to travel, but the other aspect is that hotels in the California area (northern *and* southern) charge far more for use of their facilities than anywhere else in the country.

We have not made a final decision yet and hate not to go to the West Coast, but we believe we might be forced into dropping this one show because of a combination of cost and attendance.

We are trying to find a way to cut costs and boost attendance in California but we are not sure if those efforts will be successful. If not, be certain that the shows in Princeton and Chicago will be held as planned.

* * *

My August column is traditionally a pretty short one — I usually get "written out" for the July anniversary issue. But I did want to keep you up to date on what's going on here and will close by saying I hope we'll see you in Prospect this summer!

— Lonnie Falk

"We're glad you consider THE RAINBOW to be 'your' magazine just as you consider the CoCo to be 'your' computer. It makes it a whole lot more fun to be a part of the CoCo Community when you know everyone is so positive about it."

And, we anticipate there will be another major change for RAINBOWfest next year — two shows rather than three. We will be in Princeton, New Jersey, and Chicago, but the future of

AVAILABLE NOW

DRAGON USER

To make the most of your new Dragon microcomputer from Dragon-Tano, you need *Dragon User* — the international, independent magazine for Dragon owners.

Each issue of *Dragon User* contains:
- reviews of the latest software
- programming advice for beginners
- hardware projects
- program listings covering games and utilities
- reviews of Dragon peripherals and add-ons
- technical advisory service
- programming articles for users

The Dragon microcomputer was launched in the UK last year. Since then we have developed a knowledge and mastery of the machine's abilities. You can benefit from our experience by subscribing to *Dragon User*, which is expanding its coverage to include all US developments.

To make sure that you receive a copy of *Dragon User* regularly, subscribe direct to us. This costs only $29.95 for 12 issues airspeeded to you — or take advantage of our special offer to long term subscribers. Individual copies of the magazine can be obtained from your Dragon dealer.

Subscription order form Receive a free book and save money by taking out a long term subscription. A two year subscription saves 10%, a three year subscription saves 20%. In addition, long-term subscribers will receive a free copy of either ☐ *The Working Dragon* or ☐ *Dragon Games Master*. Please send a cheque made payable to *Dragon User* with this form.
Start my subscription from the following issue

Name

Address

Signed Date

Subscription rates US and Canada airspeeded ☐ US$29.95 for 12 issues/1 year ☐ US$54.90 for 24 issues ☐ US$71.90 for 36 issues. Send this form to *Dragon User*, % Business Press International, 205 E. 42nd St., New York, NY 10017

NEW

OWL-WARE
WINCHESTER BASIC

ANNOUNCING... the Development of a Major Breakthrough in HARD DRIVE SYSTEMS for the COLOR COMPUTER!!!

Several months ago OWL-WARE introduced the Finest OS9 Hard Drive System for the Color Computer. Now we are about to introduce the only RSDOS interface System worthy of our computer, OWL-WARE Winchester Basic. For the first time you have available a true Winchester System, although there are 10 directories made available to BASIC, the only limit to size of any file is the size of your drive. On a 10 meg drive you could have a 8 meg file on directory 5 and a 1 meg file on directory 8 and small files everywhere. You turn the computer on and you can immediately access your drive from BASIC or any language using commands you already know. You do not have to know or use OS9 to use OWL-WARE WINCHESTER BASIC, but if you do, all files saved from RSDOS are available to OS9. All files generated from OS9 can be made available to RSDOS by copying to the WINCHESTER BASIC directories. There are no partitions to wall you into, only one operating system, but nothing forces you to use an operating system you don't like.

Call for further details and availability on this breakthrough product!!!

Prices WITH DRIVE BELOW

ONLY... **$50.** WITHOUT DRIVE **$75.**

CREATE BEAUTIFUL PICTURES WITH

MASTER ARTIST

vers 2.0

- Convenient, on-screen menu
- Accepts input from X-PAD, TOUCH-PAD, MOUSE or JOYSTICK
- Magnification mode
- Draw with custom paintbrushes
- Easy free-hand sketching
- "Paint" command
- 10 colors at a time
- Pictures are ready for use in BASIC programs
- Lettering in any size
- Screen dump to Color Ink-Jet or other Tandy printers

64K DISK $29.95

OS-9 HARD DRIVE SYSTEMS

Disk Access is at Least... ***8 Times Faster than Floppy Drives.***

Control up to 2 Drives. EACH with Continuous Massive Memory!!! Complete OS-9 Hard Drive System Includes... Software, Hard Drive, Controller and L.R. Tech Interface.

FLASH: OS-9 and RSDOS... "This may prove to be the perfect mating of both systems." RAINBOW (MAY 86)

$525. 5MEG $659. 10MEG

$799. 20MEG

OWL-WARE is pleased to announce an exclusive arrangement to Distribute the L.R. TECH Hard Drive Interface and Software.

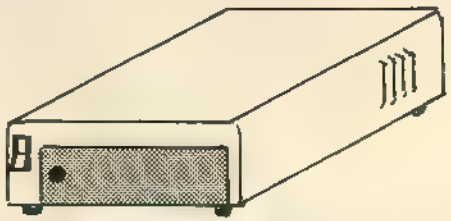

Interface & Software Only $99.

NOTE: Interface is not Interrupt Driven Like Our Competition. Therefore, the System Clock does not Lose Time During Hard Drive Access.

INSTALL IN ANY SLOT OF MULTI-PAK OR USE Y CABLE.

DEALERS INQUIRES INVITED

VIEW 3-DIMENSIONAL OBJECTS FROM ANY ANGLE WITH

3D DESIGNER

- Convenient, on screen menu
- Supports input from X-PAD, TOUCH-PAD, MOUSE or JOYSTICK
- Built-in screen dump to Tandy printers
- Calculates dimensions for you from just a rough sketch
- Plots or calculates lines and arcs
- On-screen sketching mode

64K DISK $29.95

OWL-WARE'S TOLL FREE ORDER LINE (800) 245-6228

DISK DRIVES

TECHNICAL ADVICE
(215) 682-6855

All Prices Include Case and Power Supply

SHhhh... Ask about the WISPER DRIVE!!!

DRIVE 0 $179. to $239.

...Call for SPECIAL PRICES on Drive 0,1,2,3 Combos.

DRIVE 1 $99. to $145.

Single
Double
Quad

All drives are new and fully assembled. We ship *FULLY TESTED and CERTIFIED DRIVES at NO ADDED CHARGE!*

CHINON and Other Brands known as the highest quality made.

STATE-OF-THE-ART TECHNOLOGY

See Special Bundled Software with Disk Drive Purchase!

We have RSDOS, JDOS, OWL DOS, ADOS available on ROM. Call about Double Sided or Special Needs.

WARRANTIES
90 day - 1 YEAR

TOLL FREE ORDER LINE (800) 245-6228

Call for LATEST PRICES!!!

M.C. & VISA Accepted

OWL-WARE
P O Box 116-D
Mertztown PA
19539

PA Res Include 6% Tax
PA (215) 682-6855

NOW AVAILABLE !!!

SUPER-TROLL

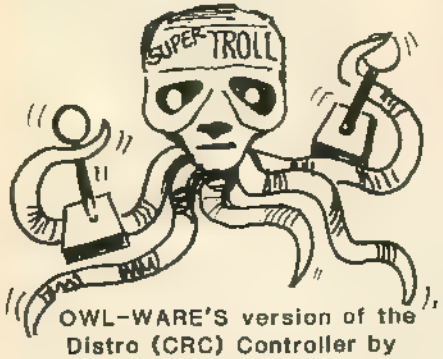

OWL-WARE'S version of the Distro (CRC) Controller by Tony DiStefano. This has sockets for 4 ROM Chips. ...only $15.00 additional with a Drive 0 System.

ADD ON OPTIONS:

CDOS	$6.
Parallel Printer Port	$25.
Real Time Clock	$10.
80 Column Card	$49.

Just Controller $99. with CDOS to $195. with ALL options

OWL TIP:

We stock Single Sided Drives, but at the Current Prices why not BUY Double Sided???

OWL-WARE SOFTWARE BUNDLE:

DISK TUTORIAL
2 UTILITIES
2 GAMES

DISK TUTOR

LEARN EVERYTHING ABOUT DISK BASIC FROM THIS MACHINE LANGUAGE PROGRAM. THE TUTOR TAKES YOU STEP BY STEP THROUGH THE LESSONS AND CORRECTS YOUR MISTAKES A MULTI-LESSON TUTORIAL THAT WILL GIVE YOU QUICK, PAINLESS KNOWLEDGE OF DISK BASIC (THIS PROFESSIONALLY WRITTEN TUTOR IS EASILY WORTH THE BUNDLE'S TOTAL PRICE).

OWL DOS

AN OPERATING SYSTEM THAT GIVES 25% FASTER DISK ACCESS AND ALLOWS USE OF DOUBLE SIDED DRIVES . CORRECTS FLOATING POINT NUMBER ERROR.

COPY-IT

QUICKLY COPIES SELECTED PROGRAMS FROM DISK. USE WILD CARD OPTION SEARCH TO SELECT GROUPS OF PROGRAMS FOR COPY (NOT FOR PROTECTED PROGRAMS)

2 GAMES

2 GAMES FROM OUR STOCK.
BOTH HAVE SOLD FOR OVER $17. EACH.

IF SOLD SEPARATELY OVER $125.00 WORTH OF SOFTWARE!!!

only $24.95!!!
(or even better)
$4.95 with
DISK DRIVE PURCHASE!!!

That plastic look . . .
A doctor in the house . . .
And, assorted CoCo commentary

A grab bag of sorts. Yes, the cover of last month's anniversary issue "feels funny," or, as one reader says, "appears to be waterproof." Well, it was *laminated*; that is, a "photopolymer," a thin plastic coating that dries upon exposure to ultraviolet light, was added to give it a spiffier look. We figured, with our mugs on the cover, we could use all the help we could get.

Perhaps "water resistant" would be more appropriate than "waterproof," to borrow terms more associated with watches and raincoats than magazines. Laminating a cover is much like waxing your car: it brings out the color to make it look prettier and it helps protect the surface, too. For instance, if you use a Magic Marker to draw mustaches on our caricatures, you can wipe them right off again. At any rate, the lamination process was an extra feature of our anniversary issue and, because it is quite expensive, it'll likely be a while before we do it again. We hope you liked it.

Something brand new this month is "CoCo Consultations," a technical Q&A column by Martin H. Goodman, M.D. Marty is a hard-core hacker if ever there was one and, I believe, his knowledge of the CoCo and its associated hardware and software is unexcelled. Our challenge here at THE RAINBOW will be to keep Marty's voluminous replies in "CoCo Consultations" from spilling over into the next dozen pages.

An added extra for RAINBOW readers is that Marty can be reached almost every evening on our CoCo SIG on Delphi. Thus, you can receive quick replies to your questions, even though, due to our "lead time," it may be months before your question is published in his (or Dan Downard's) column.

I was recently treated to several hundred words of "clarification" from Marty in response to a few dozen words in a letter to the editor in July's issue. It appears one of our readers was somewhat overzealous in his comparison of the CoCo, the Amiga, the Macintosh and the Atari 520ST.

No, the CoCo's Motorola MC6809E, most certainly, *is not* a 16-bit CPU, as was claimed, but rather an eight-bit device, albeit with 16-bit internal registers. Secondly, while 512K add-ons are available for the CoCo, only 64K is directly addressable. There were some other inaccuracies, too, but, for Marty's full response, you'll need to check our CoCo SIG database.

Professor Art Flexser was one of the first to chide us for not contesting the letter when we ran it, an editorial oversight. We've also received letters from several others, including George Henry of Glendale Heights, Illinois; Lake Smith of Mt. Juliet, Tennessee; Troy Rothwell of Battle Creek, Michigan; and Alan Blount of Grand Junction, Colorado. The sum and crux of everyone's remarks is that, yes, the CoCo is a wonderful machine, but let's keep the facts straight.

Toward that end, we asked Bill Barden to do a piece on "How Does the CoCo Stack Up?" Bill is a recognized authority on personal computers and his commentary begins on Page 90. Perhaps this will make up for letting that July letter slip through.

And, what else is new? Well, RAINBOW's technical editor, Dan Downard, is about ready for us to introduce the long-awaited RAINBOW ON DISK service, which will include OS-9 programs, too. Stay tuned.

Lastly, we'll soon be mailing THE RAINBOW in Kraft paper — the infamous plain brown wrapper — in order to provide extra protection during mailing. So, if you've been putting off subscribing because you don't like the label being stuck on the cover, now's your chance to join the ranks of those who save money, and time, by signing up for home delivery. For this month, that's "a wrap" for me, too.

— Jim Reed

500 POKEs, PEEKs, 'N EXECs

FOR THE TRS-80 COCO

NEVER BEFORE has this information of vital significance to a programmer been so readily available to everyone. This book will help you 'GET UNDERNEATH THE COVER' of the Color Computer and develop your own HI-QUALITY Basic and ML programs. SO WHY WAIT??
This 80-page book includes POKEs, PEEKs and EXECs to:

- ★ Autostart your basic programs
- ★ Disable Color Basic/ECB/Disk Basic commands like LIST, LLIST, POKE, EXEC, CSAVE(M), DEL, EDIT, TRON, TROFF, PCLEAR, DLOAD, RENUM, PRINT USING, DIR, KILL, SAVE, LOAD, MERGE, RENAME, DSKINI, BACKUP, DSKI$, and DSKO$.
- ★ Disable BREAK KEY, CLEAR KEY and RESET BUTTON.
- ★ Generate a Repeat-key.
- ★ Transfer ROMPAKS to tape (For 64K only).
- ★ Speed Up your programs.
- ★ Reset, MOTOR ON/OFF from keyboard.
- ★ Recover Basic programs lost by NEW.
- ★ Set 23 different GRAPHIC/SEMIGRAPHIC modes
- ★ Merge two Basic programs.
- ★ AND MUCH MUCH MORE!!!

COMMANDS COMPATIBLE WITH 16K/32K/64K/COLOR BASIC/ECB/DISK BASIC SYSTEMS and CoCo I and CoCo II.

ONLY $16.95

ORDER TODAY! VISA, MC, Am Ex, Check or MO. COD add $2.50. Please add $3.00 S & H. USA & Canada, foreign add $5.00. NYS residents p add sales tax. All orders shipped WITHIN 24 HOURS!

MICROCOM SOFTWARE
P.O. Box 214 Fairport, N.Y. 14450
Phone (716) 223-1477

UTILITIES/BOOKS

UTILITY ROUTINES for the TANDY & TRS-80 COCO (Vol 1)

This powerful book for Basic and ML Programmers, includes program explanation, memory requirements and an annotated source listing for the utility routines given below. These routines if bought individually will cost you HUNDREDS OF DOLLARS.

These are 100% Position Independent ML Utilities and require no ML programming knowledge.

COMMAND KEYS: Access commands with 2 keystrokes.
CURSOR STYLES: Over 65000 cursor styles.
ERROR SKIP: 'ONERR GOTO' for Basic Programs.
FULL LENGTH ERRORS: Get real word error messages.
KEY CLICKER: Ensure key input accuracy
REPEAT KEY: Repeat ANY key
REVERSE VIDEO (Green & Red) Eliminate eye-strain.
SPOOLER: Don't wait for those long printouts.
SUPER SCROLLER: Save/view scrolled lines.
TAPE-TO-DISK: Copy Basic and ML programs.
AND MUCH MUCH MORE!!!

For 16K/32K/64K Cassette or Disk Systems, CoCo I & CoCo II.

BOOK $19.95

THESE ROUTINES (READY-TO-RUN) ON CAS/DISK:

$24.95

BOTH BOOK AND CASSETTE or D.SK.

$36.95

OTHER "MUST" BOOKS

UNRAVELLED SERIES: These 3 books provide a complete annotated listing of the BASIC/ECB and DISK ROMs.

COLOR BASIC UNRAVELLED: $19.95
EXTENDED BASIC UNRAVELLED: $19.95
DISK BASIC UNRAVELLED: $19.95
ALL 3 UNRAVELLED BOOKS: $49.95
RAINBOW GUIDE TO OS-9 (Book) $18.95
RAINBOW GUIDE TO OS-9 (2 Disks) $29.00
BASIC PROGRAMMING TRICKS: Tips and tricks for Basic Programmers. Only $14.95

WE HAVE ALL THAT YOU NEED TO SUCCEED

SUPER TAPE/DISK TRANSFER

- Disk-to-Disk Copy (1 – 3 passes)
- Tape-to-Disk Copy
- Tape-to-Disk Automatic Relocate
- Disk-to-Tape Copy
- Tape-to-Tape Copy

Copies Basic/ML programs and DATA files.
32K Disk System
(Disk to Disk Copy requires 64K)

DISK ONLY **$24.95**

BEST OF COCO TIME '85

(UTILITIES)

18 best selected utilities from COCO-TIME 1985 like:

- In Memory Disk Drive for 64K Cassette Users
- CoCo Disk Zap
- Basic Program Packer
- Tape Encryption (Basic)
- Disk Encryption (Basic)
- Graphics Screen Dump for OMP Printers
- Basic Search
- EZ Disk Master
- Function Keys
- Graphics Zoom
- Tape Index System
- 40K Basic (for 64K Cassette Users)
- Alpha Directory • Banner Creator
- LIST/DIR Pause • Disk Mailing List
- Super INPUT/LINE INPUT
- Tape-to-Tape Copy

Disk or Cassette Only For **$26.95**

UTILITY BONANZA I

Includes 20 best-selected utilities:

- 40K Disk Basic • Disk Cataloger
- Super Tape-to-Disk Copy (with Automatic Relocate)
- Disk-to-Tape Copy
- LList Enhancer (with page numbering!)
- Graphics Typesetter (two text sizes!)
- LARGE OMP Graphics Dump
- X-Ref for Basic Programs
- Hidden 32K (Use the "hidden" 32K from your 64K CoCo)
- Basic Stepper (Super Debugger!)
- RAM Disk (for Cassette & Disk Users)
- Single Key Printer Text Screen Dump

AND MUCH, MUCH MORE!!!

DISK (64K Req.) ONLY **$29.95**

OTHER SOFTWARE . . .

Telewriter-64	(Cas) **$47.95**	(Dsk) **57.95**
Telepatch (Dsk)		**19.95**
CoCo Max (Cas)		**67.95**
CoCo Max II (Dsk)		**77.95**
CoCo Max Upgrade (Dsk)		**18.95**
Pro Color File (Dsk) (includes SIMON)		**54.95**
Dynacalc (Dsk)		**79.95**
Autoterm (Cas)		**36.95**
(Latest Version) (Dsk)		**46.95**

COCO UTIL II (Latest Version): Transfer CoCo Disk files to IBM compatible computer. Transfer MS-DOS files to CoCo. ONLY **$36.95**

DISK ANTI-PIRATE: Best copy-protection program for disk Basic and ML programs. ONLY **$59.95.**

HIDE-A-BASIC 1.1: Best copy-protection program for Cassette Basic programs. ONLY **$24.95.**

(Both Disk Anti-Pirate & Hide-A-Basic 1.1 for ONLY **$79.95**)

CABLES/HARDWARE

UNIVERSAL VIDEO DRIVER: Use your monochrome or color monitor with your CoCo (ALL CoCos). Includes audio connection. Easy installation – no soldering. ONLY **$29.95**

INTRONICS EPROM PROGRAMMER: Best EPROM Programmer for the CoCo. Lowest Price Anywhere – **$137.95.**

RS232 Y CABLE: Hook 2 devices to the serial port. ONLY **$18.95.**

MICROCOM 2 POSITION SWITCHER: Select any one of two RS232 devices (printers/modems) from the serial port. ONLY **$29.95.**

MICROCOM 3 POSITION SWITCHER: Select any one of three RS232 devices (printers/modems) from the serial port. ONLY **$34.95.**

Y CABLE: Use your Rompak with your Disk System. ONLY **$24.95.**

DISKETTES (10): BONUS Brand SS/DD diskettes for the CoCo. 100% Guaranteed. **$12/box.**

MICROCOM SOFTWARE
P.O. Box 214
Fairport, N.Y. 14450
Phone (716) 223-1477

Our software/books are available at all leading dealers in USA, Canada and Australia. To Order: Order by phone & get a $2 refund for your phone call. VISA, MC, Am Ex, Check, MO. Please add $3.00 shipping and handling (USA & CANADA, other countries $5.00). COD add $2.50 extra. NYS residents please add Sales Tax. Immediate shipment. Dealer inquiries invited.

24-HOUR ORDER HOT LINE (7 DAYS A WEEK): (716) 223-1477

Mining on the Planet Dune becomes a dangerous job when faced with . . .

The Menace of the SandWorm

By Peter Meyers

I had just seen the movie *Dune* for the third time and had retired to my CoCo to think of some great new program to work on. I eventually gave up that ridiculous notion and began playing a game of *Colorpede*. As I played, I thought about all the people with 4K CoCos who are missing out on the fun. So with the ideas of *Dune* still fresh in my head, I began work on my program, *SandWorm*.

SandWorm is a Low-Res Centipede-type game in which you are an underground mining vehicle that must burrow through the sand, destroy boulders, and (most importantly) avoid the treacherous Sandworm.

After the title page appears, just press ENTER and the game screen is produced. Use the right joystick to control the red mining vehicle at the bottom of the screen. As you move, you burrow a path through the sand, but you must move around boulders or destroy them to clear the way for more burrowing. The firebutton triggers the Ultrasonic Devastator, a sheet of sound that breaks rocks (for three points) and petrifies any portion of the Sandworm (for 10 points) turning it to solid stone. Your score appears in the upper left-hand corner, and the computer keeps track of both the present and high scores.

The Sandworm also must maneuver around the rocks, and when it hits one, it changes direction, eventually moving downward to

Peter James Meyers is a 15-year-old sophomore at Thomas Jefferson High School in Rockford, Illinois. He enjoys experimenting with graphics and has owned his CoCo for six years and a CoCo 2 for the past two.

VCR

THE HOME VIDEO MONTHLY

A funny thing has happened in the home video market. As it gets easier and easier to watch what you want, it gets harder and harder to decide what that might be.

Dozens of new tapes are released into the stores every week, along with hundreds of hours of programming on the network and cable channels. It has reached a point where even the most devoted videophile can use a little help sorting through it all.

Now that help is available.

Inside **VCR** you will find clear, easy-to-read reviews of all the best new releases. You'll find out about little-known videos — what they're about and where to get them. And in the feature articles, you'll find some very entertaining reading about the entertainment business.

Now that you've discovered **VCR**, you won't want to risk missing a single issue. You can save yourself the trouble of walking to the newsstand each month, and save yourself some money at the same time.

Just fill out the attached card and drop it in the mail. Or even easier, call (502) 228-4492 and ask for Sandy. She'll see to it that **VCR** is delivered right to your door each and every month of the year.

Yes, enter my subscription for the next 12 issues of VCR.

At only $15, that's 36 percent off the regular newsstand price.

Name _____

Address _____

City _____ State _____ ZIP _____

☐ My check in the amount of _____ is enclosed.
(In order to hold down costs, we do not bill.)

Charge to: ☐ VISA ☐ MasterCard ☐ American Express

Acct. Number _____ Exp. Date _____

Signature _____

*Subscriptions to VCR are $15 a year in the United States. Canadian rates are U.S. $22. Air mail rate elsewhere is U.S. $60. All subscriptions begin with the current issue. Please allow 6 to 8 weeks for first copy. Kentucky residents add 5% sales tax. **U.S. currency only, please.** In order to hold down non-editorial costs, we do not bill.

To order by phone (*credit card orders only*) call 800-847-0309, 8 a.m. to 5 p.m. EST. For other inquiries call 502-228-4492.

Mail to: VCR, The Falsoft Building, P.O. Box 385, Prospect, KY 40059

destroy your miner. If any part of the worm collides with you, you are instantly smashed to pieces. The worm also possesses a natural burrowing beam that breaks up rocks as well as destroys you. When you are destroyed, the worm restarts at the upper left-hand corner of the screen, a few more rocks are added to the screen and you continue until all three of your miners are destroyed.

When the game ends, the high score is displayed and you are asked if you want to play again. As long as you do not end the program, the high score remains updated throughout the games.

The best thing about *SandWorm* is it only uses 2.083K of memory and will run on the smallest of CoCos. I have not included the famous speedup POKE because my system will not accept it, but those who want to should add it to give more excitement to the game. The game itself is pretty self-explanatory and you should have no trouble mining the rich soil of the desert planet with a little practice (and a lot of luck). □

The listing: SANDWORM

```
1Ø CLEAR1Ø:CLSØ:PRINT@1Ø7," SAND
WORM ";:PRINT@164," BY: PETER ME
YERS, 1985 ";:PRINT@23Ø," FOR TH
E TRS-8Ø COCO ";:PRINT@42Ø," PRE
SS <ANY KEY> TO PLAY ";
2Ø A$=INKEY$:IFA$=""THEN2Ø
3Ø LC=7:LV=3:B=Ø:S=Ø
4Ø CLS3:FORX=1TO6Ø:PRINT@RND(447
),"o";:NEXT:FORX=6TO13:CP(X-5)=X
:DM(X-5)=1:NEXTX
5Ø PRINT@1,STR$(S)+" ";:H=JOYSTK
(Ø):V=JOYSTK(1)
6Ø A=A+1:IFA=1THENSC=464
7Ø PRINT@SC,CHR$(128);
8Ø IFH>45THENSC=SC+1 ELSEIFH<15T
HENSC=SC-1
9Ø IFV>45THENSC=SC+32 ELSEIFV<15
THENSC=SC-32
1ØØ IFSC>511THENSC=SC-32 ELSEIFS
C<354 THENSC=SC+32
11Ø IFSC>51ØTHENSC=SC-1 ELSEIFSC
<352THENSC=SC+1
12Ø IF PEEK(SC+1Ø24)=15 THENMU=1
13Ø IFMU=1ANDH>45THENSC=SC-1 ELS
EIFMU=1ANDH<15THENSC=SC+1
14Ø IFMU=1ANDV>45THENSC=SC-32 EL
SEIFMU=1ANDV<15THENSC=SC+32
15Ø MU=Ø
16Ø PRINT@SC,CHR$(183);
17Ø P=PEEK(6528Ø):IFP=126ORP=254
THENGOSUB33Ø
18Ø B=B+1:IFB>1THENNEXTX
19Ø FORX=LC TO1 STEP-1
2ØØ PRINT@CP(X),CHR$(128);
21Ø CP(X)=CP(X)+DM(X)
22Ø IF(CP(X)+1)/32=INT((CP(X)+1)
/32) THENCP(X)=CP(X)+32:DM(X)=-1
23Ø IFCP(X)/32=INT(CP(X)/32) THE
NCP(X)=CP(X)+32:DM(X)=1
24Ø IFPEEK(CP(X)+1Ø24)=15 THENCM
=1
25Ø IFCM=1 ANDDM(X)=1 OR CM=1 AN
DDM(X)=-1 THENDM(X)=32:CP(X)=CP(
X)+31:CM=Ø
26Ø IFCM=1 ANDDM(X)=32 THEN DM(X
)=1:CP(X)=CP(X)-31
27Ø IF CP(X)>448 THENTB=TB+1:IFT
B=1 THENDM(X)=-1
28Ø IFCP(X)>51Ø THENCP(X)=CP(X)-
64:DM(X)=-1
29Ø IF PEEK(CP(X)+1Ø24)=183 THEN
GOSUB45Ø
3ØØ PRINT@CP(X),CHR$(153);:CM=Ø
31Ø CL=RND(3):IFCL=1THEN39Ø
32Ø GOTO5Ø
33Ø SOUND255,1:FORLP=SC-32 TO1ST
EP-32
34Ø IFPEEK(LP+1Ø24)=15 THENS=S+3
:PRINT@LP,CHR$(175);:SOUND1ØØ,1:
RETURN
35Ø IFPEEK(LP+1Ø24)=153 THENS=S+
1Ø:PRINT@CP(LC),"o";:LC=LC-1:IFL
C=ØTHENFORX=6TO13:CP(X-5)=X:DM(X
-5)=1:NEXTX:LC=7:X=7:TB=Ø:SOUND1
,2:SOUND8,1:RETURN:ELSESOUND1,2:
SOUND8,1:RETURN
36Ø PRINT@LP,CHR$(2Ø7);:PRINT@LP
,CHR$(128);:PRINT@LP,CHR$(175);
37Ø NEXTLP
38Ø RETURN
39Ø IFCP(LC)>478 THEN5ØELSEFORPL
=CP(LC)+32TO51ØSTEP32
4ØØ IFPEEK(PL+1Ø24)=15 THENSOUND
2ØØ,1:GOTO43Ø
41Ø IFPEEK(PL+1Ø24)=183 THENDS=1
:GOTO44Ø
42Ø PRINT@PL,CHR$(17Ø);:NEXTPL:S
OUND2ØØ,1
43Ø IFPL>51Ø THENPL=51Ø
44Ø FOREL=CP(LC)+32TOPL STEP32:P
RINT@EL,CHR$(175);:NEXTEL:IFDS=1
 THENDS=Ø:GOSUB45Ø:GOTO5Ø ELSEGO
TO5Ø
45Ø LV=LV-1:IFLV=ØTHEN46ØELSEFOR
Y=6TO13:PRINT@CP(Y-5),CHR$(175);
:CP(Y-5)=Y:DM(Y-5)=1:NEXTY:TB=Ø:
SOUND2Ø,7:SOUND1,9:FORMM=1TO2Ø:P
RINT@RND(479),"o";:NEXTMM:RETURN
46Ø IFS>HS THENHS=S
47Ø PRINT@1,STR$(S)+" ";:PRINT@7
1," HIGH SCORE:"HS" ";:PRINT@234
," GAME OVER ";:PRINT@421," ANOT
HER GAME ? (Y/N) ";
48Ø A$=INKEY$:IFA$=""THEN48Ø ELS
EIFA$="Y"THENGOTO3Ø ELSEEND
```

CoCo Max™ II

You'll use it all the time and love using it.

What is CoCo Max ?

Simply the most incredible graphic and text creation "system" you have ever seen. A Hi-Res Input Pack (more on the pack later) is combined with high speed machine language software. The result will dazzle you.

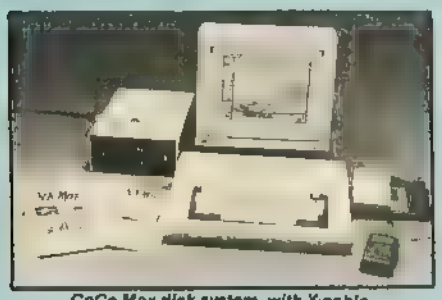

CoCo Max disk system, with Y-cable.

Is CoCo Max for you ?

Anyone who has ever held a pencil or a crayon for fun, school or business will love it. A 4 year-old will have fun doodling, a 15 year-old will do class projects and adults will play with it for hours before starting useful applications (illustrations, cards, artwork, business graphics, flyers, charts, memos, etc.) This is one of the rare packages that will be enjoyed by the whole family.

What made CoCo Max an instant success ?

First there's nothing to learn, no syntax to worry about Even a child who can't read will enjoy CoCo Max. Its power can be unleashed by simply ***pointing*** and ***clicking*** with your mouse or joystick. With ***icons*** and ***pull down menus,*** you control CoCo Max intu tively; it works the same way you think.

Don't be misled by this apparent simplicity. CoCo Max has more power than you thought possible. Its blinding speed will astound you.

It lets you work on an area 3.5 times the size of the window on the screen. It's so friendly that you will easily recover from mistakes: The ***undo*** feature lets you revert to your image prior to the mistake. As usual, it only takes a single click.

Later, we will tell you about the "typesetting" capabilities of CoCo Max II, but first let's glance at a few of its graphic creation tools

With the ***pencil*** you can draw free hand lines, then use the ***eraser*** to make corrections or changes. For straight lines, the convenient ***rubber-banding*** lets you preview your lines before they are fixed on your picture. It's fun and accurate. Lines can be of any width and made of any color or texture.

The ***paint brush,*** with its 32 selectable brush shapes, will adapt to any job, and make complicated graphics or calligraphy simple.

For special effects, the ***spray can*** is really fun: 86 standard colors and textures, all available at a click. It's like the real thing except the paint doesn't drip.

CoCo Max will instantly create many shapes: circles, squares, rectangles (with or without rounded corners), ellipses, etc. Shapes can be filled with any pattern. You can also add hundreds of custom patterns to the 86 which are included.

The ***Glyphics*** are 58 small drawings (symbols, faces, etc.) that can be used as rubber stamps. They're really great for enhancing your work without effort.

Pull down menus

Zoom in !

Control Over Your Work

CoCo Max's advanced "tools" let you take any part of the screen, (text or picture) and perform many feats:

• You can move it around • Copy it • Shrink or enlarge it in both directions • Save it on the electronic ***Clipbook*** • Flip it vertically or horizontally • Rotate it • Invert it • Clear it, etc. etc.

All this is done instantly, and you can always ***undo*** it if you don't like the results.

For detail work, the ***fat bits*** (zoom) feature is great, giving you easy control over each pixel.

To top it all, CoCo Max II works in color. Imagine the pictures in this ad in color. If you own a Radio Shack CGP-220 or CGP-115, you can even print your work in full color !

There is so much more to say, such as the capability to use CoCo Max images with your BASIC programs, the possibility to use CoCo Max's magic on any standard binary image file. There are also many advanced features such as the incredible ***lasso***.

Inside the Hi-Res Input Pack

Why a Hi-Res Input Pack ?

Did you know that the CoCo joystick input port can only access 4096 positions (64x64)? That's less than 10% of the Hi-Res screen, which has 49152 points! (256x192). You lose 90% of the potential. The Hi-Res Input Pack distinguishes each of the 49152 distinct joystick or mouse positions. That's the key to CoCo Max's power. The pack plugs into the rom slot (like a rom cartridge). Inside the pack is a high speed multichannel analog to digital converter. Your existing joystick or mouse simply plugs into the back of the Hi-Res Pack.

Electronic Typesetting...

You'll be impressed with CoCo Max's capability. Text can be added and moved around anywhere on the picture. (You can also rotate, invert and flip it...) At a click, you can choose from 14 built in ***fonts*** each with 16 variations. That's over 200 typestyles!

Examples of printouts

Printing Your Creations

There are a dozen ways to print your work. All are available with a click of your joystick (or mouse) without exiting CoCo Max. Your CoCo Max disk includes drivers for over 30 printers !

All the CoCo Max pictures are **unretouched** screen shots or printouts (Epson RX-80).

CoCo Max II™

The whole family will enjoy CoCo Max. Here are a few examples of the possibilities.

All these pictures are **unretouched** screen photos or printouts (on an Epson RX-80).

1 *Publish a newsletter or bulletin*

2 *Fun for children while stimulating creativity.*



3 *Business graphs, charts, diagrams. Also memos*



4 *Junior's homework and science projects. Term papers too!*

7 *Video portrait (with optional digitizer).*



8 *This is a cartoon.*

5 *Over 200 typestyles to choose from! generate flyers.*

6 *A new way to express your imagination.*



9 *schematics and floor plans.*



10 *Logos and letterheads.*

System Requirements:

Any 64K CoCo and a standard joystick or mouse. (The koala pad and the track ball work, but are not recommended.)
Disk systems need a Multi-Pak or our Y-Cable. CoCo Max is compatible with any Radio Shack DOS and ADOS.
Note: the tape version of CoCo Max includes almost all the features of CoCo Max II except *Shrink*, *Stretch*, *Rotate*, and *Glyphics*. Also, it has 5 fonts instead of 14.
CoCo Max is not compatible with JDOS, DoubleDOS, MDOS, OS-9, the X-pad, and Daisy Wheel Printers.

Printers Supported:

Epson MX, RX, FX and LX series, Gemini, Star, Micronix, Delta 10, 10X, 15, 15X, SG-10,Okidata 82A, 92, 93, C. Itoh Pro-writer, Apple Image-writer, Hewlett-Packard Thinkjet, Radio Shack DMP 100, 105, 110, 120, 200 400, 500, Line Printer 7, Line Printer 8, TRP-100, CGP-220, (DMP-130 use Line Printer 8), PMC printers, Gorilla Banana.
Color printing: CGP-200, CGP-115

Pricing

CoCo Max on tape $69.95
with Hi-Res Pack and manual.
CoCo Max II (disk only) $79.95
with Hi-Res Pack and manual.
Upgrade: CoCo Max to CoCo Max II
New disk and manual $19 95
New features of CoCo Max II: 14 fonts and g yphic font, dynamic shrink and stretch, rotate, multiple drive capability 66 page scrapbook. point and click file load, color printer drivers, full error reporting
Upgrade: CoCo Max tape to disk
manuals, disk and binder $24.95
Y-Cable: *Special Price* $19.95
Super Picture Disks #1, #2, and #3
each: $14.95
All three picture disks $29.95

Guaranteed Satisfaction
Use CoCo Max for a full month. If you are not delighted with it, we will refund every penny.

Font Editor Option

A font is a set of characters of a particular style. CoCo Max includes 15 fonts. You can create new fonts of letters, or even symbols or graphics with the font editor. Examples: set of symbols for electronics, foreign alphabets, etc. $19.95

Video Digitizer DS-69

This new Low Cost Digitizer is the next step in sophistication for your CoCo Max system. With the DS-69 you will be able to digitize and bring into CoCo Max a frame from any video source: VCR, tuner, or video camera. Comes complete with detailed manual and C-SEE software on disk. Multi-Pak is required.
New Low Price Save $50..... $99.95
New: faster DS-69A..... $149.95

COLORWARE

Colorware Incorporated
79-04A Jamaica Avenue
Woodhaven, NY 11421

800 221-0916
Orders only.
NY & info: (718) 296-5916
Hours: 9-5 Eastern time.

Add $3.00 per order for shipping.
We accept Visa, MC checks, M.O.
C.O.D. add $3.00 extra.
NY and CT: add sales tax.
Shipping to Canada is $5.00
Overseas FPO, APO add 10%

A Recipe to Fix CoCo Fried Chips

By Marty Goodman

It is very rare that controllers just spontaneously cease to work. In nearly all cases the reason is because the user has plugged, unplugged, or wiggled the controller in the computer or Multipak port socket while the power was on. What usually happens is the positive and negative 12-volt lines (on old CoCo 1s and on Multipaks) contact the adjacent NMI and Halt line pins. Often this also burns out the CPU (the 6809) and/or the SAM (6883, also given as 74LS783 or 74LS785) in the computer itself. Had Tandy bothered, for about $1.50 worth of zener diodes and SCRs it could have fully protected the computer from such abuse. But in all revisions of the CoCo circuit board so far, it has not introduced such protective circuitry.

Fixing the burned out disk controller usually entails replacing the burned out chips. This is facilitated by knowing what chips are likely to get burned out and by having a full set of spares.

Martin H. Goodman, M.D., a physician trained in anesthesiology, is a longtime electronics tinkerer and outspoken commentator — sort of the Howard Cosell of the CoCo world. Marty is the database manager of RAINBOW's CoCo SIG on Delphi. His noncomputer passions include running, mountaineering and outdoor photography. Marty lives in San Pablo, California.

Usually, on the newer controllers only the main disk controller chip (1793-002, MB8877a, or 1773), the disk ROM and the write precompensation chip (if any) is socketted. Most of the small scale logic chips are soldered directly to the board. You should be reasonably adept in desoldering integrated circuits. You should have on hand a full assortment of all chips found in your particular controller. A spare controller of the same make and model will give you access to the bigger socketted chips and the smaller chips are usually available at general IC supply houses.

On most models of CoCo disk controller, the 7416 (open collector buffer) is quite vulnerable to damage from the −12-volt supply. In three CoCo 2 controllers I have fixed, both 7416s had to be replaced. These are U3 and U8 on the older type CoCo 2 controller with a 40-pin controller chip, and U8 and U6 on the newer Tandy controller that uses the 28-pin 1773 disk controller chip. The 74LS221 (one shot delay timer) seems to often burn out as well. Occasionally the main disk controller chip does, too.

On the old CoCo 1 controller from Tandy, the 74LS02 and the 74LS04 chips (U9 and U5 on that card) have a track record of blowing — sometimes spontaneously. Be sure to look for blown 7416s and 74LS221s on that model. You should also have the associated Tandy technical service manual and a frequency counter. The potentiometers may need adjustment so you'll need the frequency counter to check for proper setting.

On third-party model controllers, the circuitry is often similar to Tandy's, and thus the vulnerable chips are likely to be the same. In the case of the old J&M controller, the disk controller chip is available only from J&M itself.

Oddly enough, the ROM chip on these controllers seldom seems to be affected. Indeed, once in the course of repairing a controller I plugged in a ROM upside down and turned on the power. After realizing my blunder, I turned off the power, inverted the ROM and tried it again. Much to my amazement, the ROM functioned just fine.

In addition to these general tips, the serious trouble-shooter will want schematic diagrams of the unit to be repaired. Tandy and HDS both supply such technical information on request and for a reasonable sum. J&M in the past was reluctant to release schematics, but may be changing its policies. DISTO agrees with the idea of releasing schematics of its products to the public, but to date has not made such information available. It is my impression that if enough customers insist on such information before buying any product from J&M or DISTO, both of these companies will quickly supply it.

The Amazing A-BUS

NEW

What will you do with it?

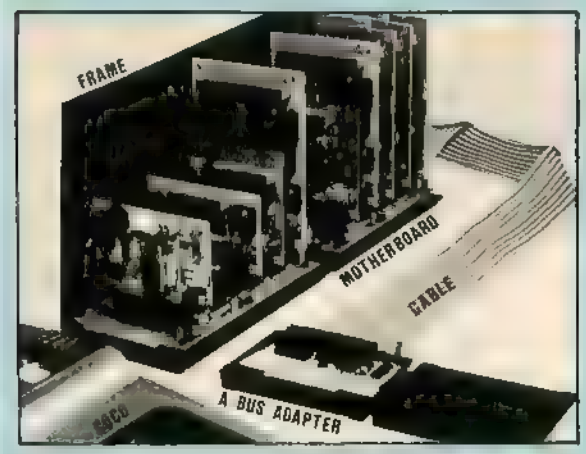

An A-BUS system with 2 Motherboards and 9 Cards.

SHEILA wanted to set up a variety of experiments in her lab. With an A-BUS, the computer can watch the mice instead of Sheila.
HARRY has a model railroad layout that he wished to automate. Now his home computer controls the engines, gates, signals, etc. through the A-BUS.
BOB tests electrical fixtures as they leave the assembly line. He develops test equipment quickly with inexpensive, off-the-shelf, and easy to use A-BUS cards.

But what's an A-BUS? It's the easiest way to connect a variety of cards that sense and control anything outs de the computer. With the A-BUS, your CoCo becomes an incred ble machine.
What would I need? First, an *A-BUS Adapter* to convert your computer bus to the A-BUS standard. Then a *Cable* (with one or two slots) to connect one or two A-BUS Cards. If you need more than two cards, the cable will be connected instead to the *A-BUS Motherboard*, which has five slots. Up to five motherboards can be chained. Finally, add you choice of *A-BUS Cards* to fit your project.
I'm not an engineer. Can I use the A-BUS? If you can wire a switch, you can use the A-BUS. No computer hardware knowledge is needed! A screwdriver is all you need for many projects.
What about software? Simple PEEK and POKE commands control the whole system, whether you read the time on the clock, switch the relays, take a temperature reading, or turn a motor.
What if I change computers? Incredibly, this is as simple as replacing the inexpensive adapter card.



A-BUS Adapters

Special: Complete set of all user's manuals. Typeset, illustrated with schematics. Only $10

CoCo to A-BUS Adapter AR-138: $49
Works with all CoCo's. Plugs into rom s ot or Multipak.
Disk systems without Multipak need Y-cable $19.95!

A-BUS adapter for: AApple II, II+, IIe.	AR-134. .$49
IBM PC, XT, AT and all compatibles.	AR-133 $69
TRS-80 Models 100, 200.	AR-135.. $69
TRS-80 Mod 3,4 4D Fits 50 pin I/O bus.	AR-132 $49
TRS-80 Model 4P. Includes extra cable	AR-137...$62
TRS-80 Model I. Plugs into 40 pin I/O bus.	AR-131...$39

A-BUS Motherboard MB-120: $99
Will accomodate five A-BUS cards. A sixth connector allows a second motherboard to be added to the first (with connecting cable CA-161.. $12). Up to five motherboards can be joined this way to a single adapter. The motherboard is mounted on a sturdy aluminum frame with card guides.

A-BUS Cable (3 ft.) CA-163: $29
Connects Adapter to 1 A-BUS card or Motherboard.
Special Cable for two A-BUS cards **CA-162...$39**

Relay Card RE-140: $129
8 industrial relays on board. Contacts are rated at 3 amps. You can control up to 64 cards (512 relays) using several motherboards. Jumpers are used to simply select the card address. The card is easily controlled in BASIC with "OUT" or "POKE". For example, OUT 1,0 turns all the relays off on card #1. Eight LED's show which relays are on.

Digital Input Card IN-141: $49
It's safe and easy to connect and read switches, keypads, thermostats, alarm loops, etc. The eight inputs can monitor the presence of voltage or switch position. Simple INP or PEEK commands read the status (On or Off) of the inputs. Each input is optically isolated for convenience and safety.

Analog Input Card AD-142:$119
With this 8 bit, 8 channel A/D converter your computer can read voltages, temperatures, pressures, light levels, etc. Take over 100 readings per second in BASIC (several thousand with machine language). It's simple to use: for example: OUT 1,3 selects channel #3, then A=INP(1) reads the voltage on that channel. Input range: 0 to 5.1V. Resolution: 20mV. Conversion time 120us.

Prototyping Card PR-152: $15
Protocard is 3½ by 4½ in. and accepts up to 10 IC's.

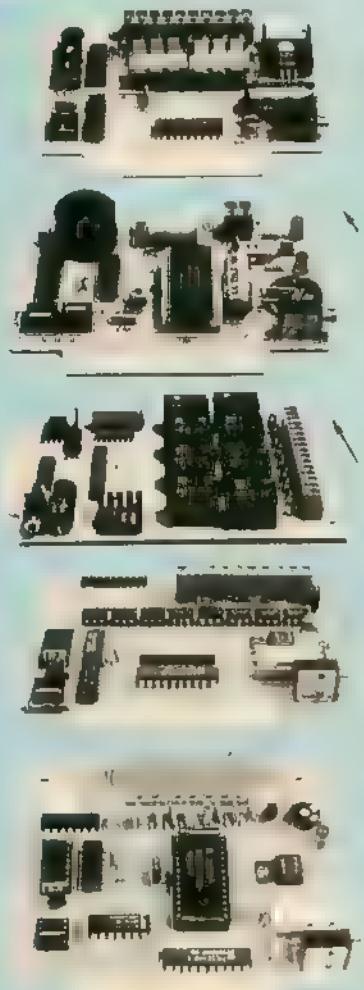

12 Bit A/D Converter AN-146:$109
This high performance analog to digital converter features accuracy to 0.025%, 130ms conversion time, sign and over range indication. The basic input range is −5 to +5 volts, with 1.2mV resolution, but the gain of the on-board amplifier can be set to measure microvolts. Ideal for a strain gauge thermocouple, pH meter, etc.

Motor Controller ST-143:$69
Stepper Motors are the ultimate in motion control. The special package (below) includes everything you need to get familiar with stepper motors: Each controller card drives **two** stepper motors (12V bidirectional, 4 phase).
Motor: 48 steps/revolution, 300 steps/second, ¼" shaft. MO-103.. $15. Power supply: PS-126 $10
Special Package: the controller card, *two* stepper motors, and power supply: **PA-181...$99**

Clock with Alarm CL-144:$89
It's the most powerful clock/calendar available. The features: • 5 second/month accuracy. • Keeps time, date, and alarm for 5 years (even with computer off). • Can time events down to 1/100 second. • Periodic "chime". • Full time and date alarm. • Four alarm outputs: Computer, LED, Buzzer, and Reed Relay. • Easy to use: for example H=INP(1) reads the hours, Y=INP(6) reads the year, etc.

Latest Developments

Voice Synthesizer	VS-153
15 Bit Analog to Digital Converter	AD-155
Intelligent Stepper Motor Controller	ST-154
Digital to Analog Converter	DA-147
LCD Display (one and two line)	LD-151
Touch Tone® Decoder	PH-145
Counter Timer	CT-154
24 Line TTL Input/Output	DT-148

Order Line (Except in NY) **800 221-0916**
Info and NY orders: (718) 296-5916
Technical Info: (203) 656-1806
All lines open weekdays 9 to 5 NY time.

Add $3.00 per order for shipping.
We accept Visa, MC, checks, M.O.
C.O.D. add $3.00 extra.
N.Y. residents add sales tax.
Shipping to Canada is $5.00
Overseas, FPO, APO add 10%

COLORWARE

Colorware Inc
79-04 Jamaica Ave
Woodhaven, NY 11421

Let CoCo take the tedium out of Adventure writing and leave the creativity to you

The Adventure Processor

By Bill Cook

Developing an Adventure game is not as difficult as one might imagine. Adventures are simply a collection of data and a series of true and false tests comparing the player's inputs to a list of data stored in memory of the computer.

The simplest way to store long lists of data in a computer's memory is through the use of arrays. Writing an Adventure game generally requires that information such as room descriptions, object lists, authorized user inputs and key responses be read into arrays so that they may be called upon quickly.

Arranging the data, formatting the text screen and processing of standard commands is required in all Adventures. Some programmers accomplish it differently. I prefer to keep it simple and easy to follow, since BASIC programs should be a learning experience.

Bill Cook is a manager for the Navy Exchange in Whidbey Island, Washington. He is the author of The Adventure Generator *and wrote his first Adventure in 1982. He uses the CoCo extensively for business applications and as a management aide.*

About the Program

Imagine a program that could actually write most of the code for you, automatically! A program that could save you hours of tedious writing, testing and debugging — a program that would function error-free, and in a matter of minutes save you more than 50 percent of the work in putting together your dream program.

ADV-PRO, or Adventure Processor, is a utility to save you hours of tedious typing of repetitive code. It simply writes a "shell" of an Adventure for you. It provides the following possibilities:

Up to 100 rooms, 60 objects and 30 commands.

A separate help message for every location in the game.

Individual score values for each object found.

Customized responses for each object "examined."

Randomized object placement, if desired, to make your game play differently every time.

Scroll-protected split screens.

Save game in progress/load previous unfinished game capability.

Operates with memory-stretching PCLEAR ZERO.

Outputs to tape or disk.

The first step in writing an Adventure is mapping it out on paper. On your map you should indicate the major compass points at the top, bottom and sides of the sheet. N, S, E, W, Up, Down, should all be indicated for ease in laying out the Adventure.

Each location should have a number as should each object you plan to place in the game. Have a good idea of the vocabulary (verbs and nouns) you want the program to recognize; two word sentences are the standard. Once you have completed this, jot down how many rooms you'll have, the number of objects and the number of commands (verbs).

Using the Program

ADV-PRO asks you for the number of items and limits you to 100 rooms, 60 objects and 30 commands. You are also asked for the room number in which you want the game to begin and for a filename. You are then asked whether to direct the output to tape or disk. After answering these questions *ADV-PRO* goes to work and creates an Adventure "shell."

Within a few minutes, you will be

over half done with creating an efficient and versatile Adventure game. *ADVPRO* writes to disk or tape, an ASCII file that is a loadable BASIC program. The pre-written coding sets up a machine language anti-scroll routine, frees the maximum available memory, initializes and reserves line numbers for all of your room descriptions, legal movement directions, help messages, object descriptions, noun lists, object score values, initial locations and verb lists. You simply modify the program with your customized data.

Here's a sample room description DATA line as generated: `10 DATA ROOM # 1 DESCRIPTION,0,0,0,0,0,0,HELP MESSAGE HERE.`

If you want room one to be described to the user: YOU ARE IN THE LIVING ROOM, simply change the line as follows. `10 DATA IN THE LIVING ROOM ,0,0,0,0,0,0,0,HELP MESSAGE HERE.` Notice that the "you are" is not necessary. The program automatically precedes each room description with "you are."

Next you decide in which directions the player will be able to move from this room. Let's assume that moving north takes you to room three, south to room four, east to room six, west to room 10, up and down lead nowhere. These locations should replace the series of zeroes that come next in the above data statement. Rooms that lead nowhere remain at zero. The line would now read like this:

```
10 DATA IN THE LIVING ROOM,3,4,
6,10,0,0,HELP MESSAGE HERE
```

Now for the help message. Assume that the player is in room one and he enters the command HELP. The remainder of the DATA statement should contain whatever response you would like the player to receive. For example, YOU SENSE A PRESENCE HERE. This phrase becomes the final part of the DATA statement:

```
10 DATA IN THE LIVING ROOM
,3,4,6,10,0,0,YOU SENSE A PRES
ENCE HERE
```

If you would like no help to be given to the user, simply leave off the phrase with the comma preceding it. This causes an automatic response of NO HELP HERE. Here's how the line would look:

```
10 DATA IN THE LIVING ROOM
,3,4,6,10,0,0
```

The standard format for object data looks like this:

```
152 DATA OBJECT # 1 DESCRIPTION,
KEYWORD,0,0,RESPONSE WHEN
EXAMINED
```

As with the room descriptions, modify the line to enter your object description. Let's assume your first object is a small rusty knife, you want it located in room six, it is worth 10 points if carried and if the player says EXAMINE KNIFE you want the game to respond with IT HAS A PEARL HANDLE. Here's how your modified line should look:

```
152 DATA A SMALL RUSTY KNIFE,
KNIFE,6,10,IT HAS A PEARL
HANDLE.
```

If you would like an object to be placed in the player's inventory initially, use location –1. If you would like an object to be placed in a randomized location (unknown), use location –2. Use of randomized object locations will make your game play differently every time.

Commands

The first seven commands the game recognizes are already built in to the game. They are: EXAMINE, INVENTORY, QUIT, SCORE, HELP, SAVE and LOAD. All the necessary coding for these commands to function is already written into your program. You can, of course, modify the code, but it will function as is. The remaining commands (if you specified more than seven) are represented in the program as null strings. The line would look like this:

```
508 V$( 8)=""
```

If you want the eighth command to be GET, simply change the line as follows:

```
508 V$( 8)="GET"
```

After making the changes to include the entire verb list, you are finished with the data portion of the Adventure.

Verb processing and conditional statements are the toughest parts of Adventure programming, and the most time-consuming. Let's still assume verb eight is GET. Processing for verb eight is accomplished between lines 7500 and 7990. This is the area where you process the different possibilities of reactions to the player's use of the verb GET. This is where you exercise your own programming talent and creativity. Here is a brief sample of what could be done:

```
7510 IF LO(N)=-1 THEN PRINT"YOU
ALREADY HAVE IT.":GOTO 60000
7520 IF LO(N)<>L THEN PRINT"I
DON'T SEE IT.":GOTO 60000
7530 IF CA=5 THEN PRINT"YOUR
ARMS ARE FULL.":GOTO 60000
7540 LO(N)=-1:CA=CA+1:PRINT
"OKAY. YOU HAVE IT.":GOTO 60000
```

Line 7510 checks to see if the object is already in the player's inventory and, if so, responds. Line 7520 checks to see if the object is in the current room and, if not, responds. Line 7540 places th object in inventory, increments th number of objects carried by one, an responds that you have the object.

Significant Variables
(In order of appearance)

R	Total number of rooms in the game
R$(n)	Description of room n
D(n,nn)	Authorized directions from room n
H$(n)	Help messages when in room n
O	Total number of objects
O$(n,1)	Description of object n
O$(n,2)	Keyword in description for object n
LO(n)	Room location of object n
SC(n)	Score value of object n
O$(n,3)	Response when object n is examined
V$(n)	Command (verb) n
NV	Total number of verbs
V1$	String containing first four characters of each verb
N1$	String containing first four characters of each object
C$(d)	Labels for directions
L	Player's current location
L5	Temporary location storage flag
LN	Line counter
Z	Temporary flag for inventory test
P	Test location for anti-scrolling
TURNS	Turn counter
I$	User's input
V2$	User's command (verb)
N2$	User's object (noun)
V$	Truncated verb
N$	Truncated noun
V	Verb number
N	Noun number
SC	Score counter
MX	Possible score
DV	Device number for loading/saving –1=tape 1=disk
F$	Filename for saving/loading

With a little experimentation and patience, you will be writing professional quality Adventures in no time. I look forward to seeing your contributions in future issues of this magazine and wish you happy Adventuring.

(You may direct questions about this program to Mr. Cook at 4346 Rhododendron Drive, Oak Harbor, WA 98277, 206-679-5220. Please enclose an SASE when writing.) □

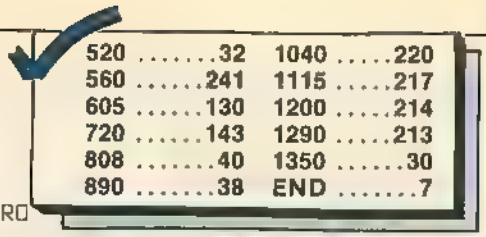

520	32	1040	220
560	241	1115	217
605	130	1200	214
720	143	1290	213
808	40	1350	30
890	38	END	7

The listing: ADV-PRO

```
1 'ADV-PRO
2 '(C) 1986 ALL RIGHTS RESERVED
3 'PROGRAM BY BILL COOK
4 'ISLAND SOFTWARE
5 '
6 'AN ADVENTURE PROCESSOR
7 '
1Ø GOTO6395Ø
2Ø 'initialize
1ØØ CLEAR15ØØ:CS$=CHR$(142):EL$=
STRING$(32,32):SG$=STRING$(32,21
7):X=Ø
11Ø DIMV(31),V$(3Ø):V$(1)="EXAMI
NE":V$(2)="INVENTORY":V$(3)="QUI
T":V$(4)="SCORE":V$(5)="HELP":V$
(6)="LOAD":V$(7)="SAVE"
17Ø GOTO5ØØ
172 A$=STR$(LN)+A$:PRINT#DV,A$:P
RINT@128,A$:PRINTEL$;EL$;EL$:LN=
LN+G:RETURN
32Ø 'centering routine
33Ø T=LEN(T$):PRINTTAB(INT(32-T)
/2);T$:RETURN
47Ø 'title routine
48Ø CLS:T$="ADVENTURE PROCESSOR"
:GOSUB33Ø:T$="(C) 1986 BY BILL C
OOK":GOSUB33Ø:PRINTSG$:RETURN
5ØØ GOSUB48Ø
51Ø INPUT"NUMBER OF ROOMS (1-1ØØ
)";RM:IFRM=Ø OR RM>1ØØ THEN51Ø
52Ø INPUT"NUMBER OF OBJECTS (1-6
Ø)";NO:IFNO=Ø OR NO>6Ø THEN 52Ø
53Ø INPUT"NUMBER OF VERBS INCLUD
ING THE   7 BUILT-IN (1-3Ø)";NV:
IFNV=Ø OR NV>3Ø THEN 53Ø
531 GOSUB48Ø:INPUT"ADVENTURE TO
START IN WHICH ROOMNUMBER";L:IFL
<1 OR L>RM THEN 531
532 GOSUB48Ø:LINEINPUT"FILENAME
(8 CHARS.MAX.):";F1$:IFLEN(F1$)>
8 THEN532 ELSE IFINSTR(F1$,".")>
Ø OR INSTR(F1$,"/")>Ø THEN532
534 LINEINPUT"OUTPUT TO DISK OR
TAPE (D/T)?";DT$:IFDT$="D"THENDV
=1:F1$=F1$+"/BAS": ELSE IFDT$="T
"THENDV=-1 ELSE 534
535 IFDV=-1THENLINEINPUT"PRESS E
NTER WHEN TAPE READY";Z$
536 OPEN"O",#DV,F1$
54Ø LN=Ø:G=1
541 REM process initialization
546 A$="GOTO6395Ø":GOSUB172
55Ø A$="CLEAR6ØØ,&H7FB5:IFPEEK(&
H7FB6)=57THEN4":GOSUB172
56Ø A$="Y=Ø:DX$="+CHR$(34)+"BEØ1
68AF8CØC3Ø8CØCBFØ1688639A78CEF39
5555Ø23417ØD6F261Ø9E888CØ5EØ2DØ9
81ØD27ØA8CØ5FF27Ø535176E9CE2A68C
E1C62Ø3DC3Ø4ØØ3Ø8CØ9341Ø1FØ13416
7EA34EØA892ØE2"+CHR$(34):GOSUB17
2
57Ø A$="FORP=1TOLEN(DX$) STEP2:A
$="+CHR$(34)+"&H"+CHR$(34)+"+MID
$(DX$,P,2):A=VAL(A$):POKE&H7FB6+
Y,A:Y=Y+1:NEXT:EXEC&H7FB6":GOSUB
172
58Ø A$="POKE&H7FCA,8":GOSUB172
59Ø A$="DIMR$(1ØØ),RM(1ØØ),D(1ØØ
,6),H$(1ØØ),V$(3Ø),O$(6Ø,3),LO(6
Ø),SC(6Ø),C$(6)":GOSUB172
591 A$="REM FORMAT FOR ROOM DATA
=DESCRITION,DESTINATIONS(N,S,E,W
,U,D),HELP RESPONSE":GOSUB172
592 LN=1Ø:G=1:FORQP=1TORM:A$="DA
TA ROOM #"+STR$(QP)+" DESCRIPTIO
N,Ø,Ø,Ø,Ø,Ø,Ø,HELP MESSAGE HERE"
:GOSUB172:NEXT
595 LN=15Ø:G=1
6ØØ A$="R="+STR$(RM)+":FORI=1TOR
:READR$(I):FORA=1TO6:READD(I,A):
NEXT:READH$(I):NEXT":GOSUB172
6Ø1 A$="REM FORMAT FOR OBJECT DA
TA=DESCRIPTION,KEYWORD,ROOM #LOC
ATION,POINT #VALUE,RESPONSE WHEN
 EXAMINED":GOSUB172
6Ø2 FORQP=1TONO:A$="DATA OBJECT
#"+STR$(QP)+" DESCRIPTION,KEYWOR
D,Ø,Ø,RESPONSE WHEN EXAMINED":GO
SUB172:NEXT
6Ø5 LN=5ØØ:G=1
61Ø A$="O="+STR$(NO)+":FORI=1TOO
:READO$(I,1),O$(I,2),LO(I),SC(I)
,O$(I,3):NEXT:T=RND(-TIMER):FORI
=1TOO:IFLO(I)=-2 THENLO(I)=RND(O
):NEXT:ELSENEXT":GOSUB172
612 FORQP=1TONV:A$="V$("+STR$(QP
)+")="+CHR$(34)+V$(QP)+CHR$(34):
GOSUB172:NEXT
62Ø LN=1ØØØ:G=1Ø
63Ø A$="NV="+STR$(NV)+":FORI=1TO
NV:V1$=V1$+LEFT$(V$(I),4):NEXT":
GOSUB172
64Ø A$="FORI=1TOO:N1$=N1$+LEFT$(
O$(I,2),4):NEXT":GOSUB172
65Ø LN=3Ø5Ø
66Ø A$="DATANORTH,SOUTH,EAST,WES
T,UP,DOWN:FORDD=1TO6:READC$(DD):
NEXTDD":GOSUB172
67Ø LN=31ØØ:G=1Ø
69Ø A$="L="+STR$(L)+":L5="+STR$(
L)+":T=Ø:SG$=STRING$(32,217):EL$
=STRING$(32,32):CLS:LN=Ø":GOSUB1
```

SUMMER SIZZLERS

NEW! Max Fonts
New for CoCo Max

Now you can have up to 72 fonts for creating dazzling type-set titles and special displays!

3 SETS OF 24 FONTS
WHICH ARE OUT OF THIS WORLD!

$24.95 each 3/$64.95

Written by Wally Bayer and Mike Shawaluk

Max Edit

© 1985 Snard Enterprises

A FONT EDITOR FOR COCO MAX

- *Edit current fonts*
- *Create new fonts*
- *Design symbol fonts*
- *Comes with pre-defined fonts*
- *CoCo Max I & II compatible*

$19.95
(Disk Only)

Written by Michael W. Shawaluk
CoCo Max™ is a registered trademark of Colorware

SET ONE

Digital Small
Digital Medium
Digital Large
Futura
Grid Small
GRID LARGE
HAIFA
MIGHT TIME
Victory
Baby Teeth Small
BABY TEETH LG.
BOBO BOLD
Cartwheel
Normande Small
Normande Medium
NORMANDE LG.
Piano
SINALOA

SET TWO

BLOCK UP
dtarlow
Koloss
maharajah
MUSKEGO
Peignot Small
Peignot Large
PROGRAM SMALL
PROGRAM MEDIUM
PROGRAM LARGE
Futura Black Small
FUTURA BLK. LG
LIQUID CRYSTAL
Moscow Small
Москоя Ларге
ORBIT
POINT OUT
Printout Small
PRINTOUT LARGE
STOP

SET THREE

Bocklin
Broadway
BROADWAY ENGR.
Old English
PIONEER
URBAN
Xerxes Small
XERXES MEDIUM
XERXES LARGE
celtic
HARTLAND
Script
SKYLINE
STENCIL
Tron Man
Tip Top
WOLT-AR

FROM DERRINGER

PRO-COLOR-FILE
© 1984 by Derringer Software, Inc

ENHANCED 2.0

- 60 Data Fields for each record
- 1020 spaces available per record if needed
- Max mizes multiple drive operation
- 28 equation lines (+−*/)
- IF-THEN-ELSE logic test in equations
- Full Screen editing on up to 4 data entry screens
- Key click and auto key repeat
- Stores custom designed report formats
- Obtains totals, averages, or summaries for any field
- Output reports to printer, screen, or disk file
- Send data out to a DYNACALC compatible file
- Separate label generator for up to 10 across labels
- Pre-define up to 16 indexes for searching/reporting file
- Sorts 750 records in under 5 minutes
- User defined selection menus
- Repeated tasks performed with one keystroke
- Comes with 75 pages of documentation in a 3 ring binder
- Supported by a national users group
- Full time programmer support
- Supplied on an unprotected disk

~~$59.95~~ $49.95

PRO-COLOR-FORMS 2.0
© 1984 by Derringer Software, Inc

PRO-COLOR-FORMS will access data files created with PRO-COLOR-FILE and merge them with a letter or place them on pre-printed forms.

• STORE UP TO 6 FORMATS • USER DEFINED PAGE SIZE • SUPPORTS SPECIAL PRINTER CONTROL CODES • RIGHT JUSTIFICATION • PASSWORD PROTECTION • MERGES WITH GRAPHICS FROM MASTER DESIGN OR TELEGRAPHICS •

PRO-COLOR-DIR
© 1984 by Derringer Software, Inc

PRO-COLOR-DIR will read your directories and create a master data file that can be accessed by PRO-COLOR-FILE for sorting and reporting. 1000 + records can be stored on one diskette with valuable information about each program.

You can obtain hard copies of the information and create labels of the filenames for placing on the diskette itself.

• DISK ID NAME • FILENAME/EXT • TYPE OF FILE • DATE CREATED • DATE UPDATED • NUMBER OF GRANS ALLOCATED • NUMBER OF SECTORS ALLOCATED AND USED • MACHINE LANGUAGE ADDRESSES •

~~$29.95~~ $19.95
FOR BOTH

DYNACALC©
SPREAD SHEET FLEXIBILITY
(Includes Dynagraph, Sidewise)

$79.95 INCLUDES @SUMMARY!

Telewriter-64™
WORD PROCESSOR POWER

$59.95 INCLUDES MASTER DESIGN

CoCo Max II
GRAPHICS SUPERIOR

$79.95 INCLUDES TELEGRAPHICS!

@ SUMMARY
© 1985 Derringer Software, Inc

If you use your spreadsheet program to keep track of your expenses then @SUMMARY can help you analyze those expenses. For example, if you indicate a "Category" for each expense then @SUMMARY will produce a report that shows a total for each category, the highest amount, the lowest amount and the average amount. In addition, @SUMMARY can produce a hi-res line graph or bar graph of the analysis and allow you to place titles on the graph. A hardcopy of the graph can also be generated as well as saved to disk.

The analysis can be saved in a "data file" which can be loaded into DYNACALC or read in by @SUMMARY for future additions to the analysis. If you use other Spreadsheets such as ELITE*CALC then you have added a graphing feature to your spreadsheet applications. The analysis can also be saved in an ASCII text file of worksheets.

*Specify RS-DOS or OS9**

(disk only) $19.95

*OS9 version does not have Hi-Res graphing and requires BasicO9

DYNACALC© is a registered trademark of Computer Systems Center
ELITE*CALC is a trademark of Elite Software
OS9 is a registered trademark of MICROWARE and MOTOROLA

SIDEWISE
© 1984 by Derringer Software, Inc

Add a new "twist" to your printer's capabilities!

SIDEWISE makes your printer do something you never thought possible—print side ways!

SIDEWISE will read in any ASCII text file and print it out side ways using a Radio Shack, Epson, Okidata, C-Itoh or Gemini printers having dot-graphics ability.

SIDEWISE OS9 is compatible with DYNACALC OS9 and requires BasicO9

SIDEWISE OS9 (Disk only) ~~$39.95~~ $29.95

SIDEWISE RS-DOS ~~$24.95~~* $19.95

* RS-DOS version included FREE with DYNACALC*

OS9 is a registered trademark of MICROWARE and MOTOROLA

TELEGRAPHICS
© 1984 by Derringer Software, Inc

PRINT HI-RES GRAPHICS USING TELEWRITER-64!

Use CoCo Max, Graphicom or other graphics programs to create letter heads and print them while using Telewriter-64.

Telegraphics interfaces with Radio Shack, Epson, Gemini, C-Itoh and Okidata printers having dot-addressable graphics. A simple modification to Telewriter-64 will allow you to exit Telewriter via the DISK I/O MENU and print out the graphic without affecting any of your text in the buffer.

This is the same feature that is included in our MASTER DESIGN program. Since we felt you don't need to buy two graphics editing programs, we have made this feature available at a reduced price.

~~$24.95~~ $19.95
(Available On Ly On Disk)

NO OTHER DISCOUNTS APPLICABLE

MASTER DESIGN
© 1984 by Derringer Software, Inc

Generates lettering in hi-res graphics that can be different sizes, skinny, bold, textured, drop shadowed, raise shadowed or tall. Also interfaces with the Telewriter-64 word processor for printing hi-res displays with your letters.

Take full advantage of all the extended BASIC hi-res graphic commands including boxes, circles, lines, copy displays and utilize GET and PUT features. Added commands include mirror reflection, turn displays backwards or upside down. Squish displays, create dot patterns for shading or diagonal lines.

The Letterhead Utility allows you to access hi-res graphics from Telewriter-64, your own BASIC programs or PRO-COLOR-FORMS.

Interfaces with dot matrix printers having dot addressable graphics.

~~$29.95~~ $24.95

See reviews in July '84 Rainbow, Oct '84 Hot CoCo

Derringer Software, Inc.
PO Box 5300, Florence, SC 29502-5300
To place an order by phone, call: ***(803) 665-5676***
10 AM and 5 PM EDT

Check, Money Order, VISA or MasterCard

South Carolina residents add sales tax

Include $3.00 for UPS Shipping - $5.00 U.S. Mail - $9.00 Air Mail

Canadian Distributor-Kelly Software
Australian Distributor-Computer Hut Software

This SUMMER SIZZLER SALE may end without notice.

```
72
7ØØ REM process adv screen
71Ø L1=LN:A$="PRINT@Ø,"+CHR$(34)
+"YOU ARE "+CHR$(34)+"R$(L)"+CHR
$(34)+"."+CHR$(34):GOSUB172
72Ø A$="PRINT"+CHR$(34)+"YOU SEE
:"+CHR$(34)+";":GOSUB172
73Ø A$="Z=Ø:FORA=1TOO":GOSUB172
74Ø A$="IFLO(A)=L AND POS(Ø)+LEN
(O$(A,1))>32 THENPRINT":GOSUB172
75Ø A$="IFLO(A)=L THENPRINTO$(A,
1)+CHR$(44);:Z=1":GOSUB172
76Ø A$="NEXT:PRINTCHR$(8);"+CHR$
(34)+"."+CHR$(34)+";":GOSUB172
77Ø A$="IFZ=ØTHENPRINTCHR$(8)+"+
CHR$(34)+":NOTHING OF INTEREST."
+CHR$(34):GOSUB172
78Ø A$="PRINT:PRINT:PRINT"+CHR$(
34)+"OBVIOUS EXITS LEAD: "+CHR$(
34):GOSUB172
79Ø A$="FORG=1TO6:IFD(L,G)<>ØTHE
NPRINTC$(G)+CHR$(32);":GOSUB172
8ØØ A$="NEXT:PRINT:PRINTSG$;:P=P
EEK(136)*256+PEEK(137)-1Ø24:POKE
&H7FCA,INT(P/32)":GOSUB172
8Ø2 A$="FORI=P+1Ø24 TO 15Ø4 STEP
32:IFPEEK(I)=217THEN LN=I:ELSE N
EXTI":GOSUB172
8Ø3 A$="IFLN>Ø THENFORJ=P TO LN-
1Ø24 STEP32:PRINT@J,EL$;:NEXTJ:L
N=Ø":GOSUB172
8Ø4 REM welcome
8Ø5 MG$="WELCOME TO THE WONDERFU
L WORLD  OF ADVENTURE. GOOD LUCK
!"
8Ø7 A$="IFTURNS=ØTHENPRINT@48Ø,"
+CHR$(34)+MG$+CHR$(34):GOSUB172
8Ø8 REM player input
81Ø L2=LN:A$="PRINT@48Ø,;:TURNS=
TURNS+1:I$="+CHR$(34)+CHR$(34)+"
:LINEINPUT"+CHR$(34)+"WHAT NOW?
"+CHR$(34)+";I$":GOSUB172
82Ø A$="IFI$="+CHR$(34)+CHR$(34)
+"THENPRINT"+CHR$(34)+"WHAT?"+CH
R$(34)+":GOTO"+STR$(L2):GOSUB172
83Ø A$="IFI$="+CHR$(34)+"LOOK"+C
HR$(34)+"THEN"+STR$(L1):GOSUB172
84Ø A$="IFLEN(I$)>1THEN"+STR$(LN
+4Ø):GOSUB172
85Ø A$="L5=L":GOSUB172
86Ø A$="G=INSTR("+CHR$(34)+"NSEW
UD"+CHR$(34)+",I$):IFG=ØTHENPRIN
T"+CHR$(34)+"I DON'T UNDERSTAND.
"+CHR$(34)+":GOTO"+STR$(L2):GOSU
B172
87Ø A$="IFD(L,G)>ØTHEN L5=D(L,G)
:L=L5:GOTO"+STR$(L1)+":ELSEPRINT
"+CHR$(34)+"YOU CAN'T GO THAT WA
Y."+CHR$(34)+":GOTO"+STR$(L2):GO
SUB172
88Ø A$="I$=I$+"+CHR$(34)+" "+CHR
$(34)+":SP=INSTR(I$,CHR$(32))":G
OSUB172
89Ø A$="V2$=LEFT$(I$,SP-1):N2$=M
ID$(I$,SP+1):V$=LEFT$(V2$,4):N$=
LEFT$(N2$,4):V=INSTR(V1$,V$):N=I
NSTR(N1$,N$)":GOSUB172
9ØØ A$="IFV=ØTHENPRINT"+CHR$(34)
+"I DON'T UNDERSTAND."+CHR$(34)+
":GOTO"+STR$(L2)+":ELSEV=(V-1)/4
+1":GOSUB172
91Ø A$="IFN=ØTHENPRINT"+CHR$(34)
+"I DON'T UNDERSTAND."+CHR$(34)+
":GOTO"+STR$(L2)+":ELSEN=(N-1)/4
+1":GOSUB172
915 REM on goto
92Ø L3=LN:A$="ON V GOTO"
93Ø LL=4ØØØ
94Ø FORI=1TONV
95Ø LL$=STR$(LL):T=LEN(LL$):LL$=
RIGHT$(LL$,T-1)
96Ø A$=A$+LL$+","
97Ø V(I)=LL:LL=LL+5ØØ
98Ø NEXT
99Ø T=LEN(A$):A$=LEFT$(A$,T-1)
992 GOSUB172:GOSUB48Ø
1ØØØ FORI=1TONV
1Ø1Ø LN=V(I):A$="REM VERB #"+STR
$(I)+" "+V$(I):GOSUB172
1Ø11 REM default each verb
1Ø12 LN=V(I)+49Ø:A$="PRINT"+CHR$
(34)+"I DON'T UNDERSTAND."+CHR$(
34)+":GOTO"+STR$(L2)
1Ø15 GOSUB172
1Ø2Ø NEXT
1Ø25 REM examine
1Ø3Ø LN=V(1)+1Ø
1Ø4Ø A$="IF LO(N)<>-1 AND LO(N)<
>L THENPRINT"+CHR$(34)+"YOU CAN'
T EXAMINE SOMETHING YOU DO NOT H
AVE OR CANNOT SEE."+CHR$(34)+":G
OTO"+STR$(L2):GOSUB172
1Ø42 A$="IFO$(N,3)="+CHR$(34)+CH
R$(34)+"THENPRINT"+CHR$(34)+"NOT
HING SPECIAL."+CHR$(34)+":GOTO"+
STR$(L2):GOSUB172
1Ø43 A$="PRINTO$(N,3):GOTO"+STR$
(L2):GOSUB172
1Ø45 REM inventory
1Ø5Ø LN=V(2)+1Ø
1Ø6Ø A$="PRINT"+CHR$(34)+"YOUR I
NVENTORY:"+CHR$(34)+":NH=Ø":GOSU
B172
1Ø7Ø A$="FORI=1TOO:IFLO(I)=-1THE
NNH=1:PRINTO$(I,1)":GOSUB172
1Ø8Ø A$="NEXT:IFNH=ØTHENPRINT"+C
HR$(34)+"NOTHING."+CHR$(34):GOSU
B172
```

```
1Ø9Ø A$="GOTO"+STR$(L2):GOSUB172
1Ø95 REM quit
11ØØ LN=V(3)+1Ø
111Ø A$="SC=Ø:PRINT"+CHR$(34)+"G
AME ENDS AFTER"+CHR$(34)+"TURNS"
+CHR$(34)+"TURNS."+CHR$(34)+":FO
RI=1TOO:IFLO(I)=-1THENSC=SC+SC(I
):NEXT:ELSENEXT":GOSUB172
1115 A$="PRINT"+CHR$(34)+"YOU SC
ORED"+CHR$(34)+"SC"+CHR$(34)+"PO
INTS."+CHR$(34)+":POKE&H7FCA,Ø:P
OKE&HBA,PEEK(&HBC):POKE&HB7,PEEK
(&HBC)+6:END":GOSUB172
1118 REM score
112Ø LN=V(4)+1Ø
113Ø A$="SC=Ø:MX=Ø:FORI=1TOO:IFL
O(I)=-1THENSC=SC+SC(I):MX=MX+SC(
I):NEXT:ELSEMX=MX+SC(I):NEXT":GO
SUB172
114Ø A$="PRINT"+CHR$(34)+"YOU HA
VE SCORED"+CHR$(34)+"SC:PRINT"+C
HR$(34)+"OUT OF A POSSIBLE"+CHR$
(34)+"MX:GOTO"+STR$(L2):GOSUB172
1145 REM help
115Ø LN=V(5)+1Ø
116Ø A$="IFH$(L)="+CHR$(34)+CHR$
(34)+"THENPRINT"+CHR$(34)+"NO HE
LP HERE."+CHR$(34)+":GOTO"+STR$(
L2)+" ELSEPRINTH$(L):GOTO"+STR$(
L2):GOSUB172
1165 REM check for get or drop
117Ø LN=6ØØØØ:A$=" IFV$="+CHR$(3
4)+"GET"+CHR$(34)+"THEN"+STR$(L1
):GOSUB172
118Ø A$=" IFV$="+CHR$(34)+"DROP"
+CHR$(34)+"THEN"+STR$(L1):GOSUB1
72
119Ø A$=" GOTO"+STR$(L2):GOSUB17
2
1195 REM load
12ØØ LN=V(6)+1Ø
121Ø A$="LINEINPUT"+CHR$(34)+"FI
LENAME TO LOAD:"+CHR$(34)+";F$":
GOSUB172
122Ø A$="IFLEN(F$)>8THENPRINT"+C
HR$(34)+"TOO LONG."+CHR$(34)+":G
OTO"+STR$(LN-1Ø):GOSUB172
123Ø A$="PRINT"+CHR$(34)+"TAPE O
R DISK? (T/D)"+CHR$(34):GOSUB172
124Ø A$="A$=INKEY$:IFA$="+CHR$(3
4)+CHR$(34)+"THEN"+STR$(LN)+" EL
SE A=INSTR("+CHR$(34)+"TD"+CHR$(
34)+",A$):IFA=Ø THEN"+STR$(LN)+"
 ELSE IFA=1 THENDV=-1 ELSEDV=1":
GOSUB172
125Ø A$="IFDV=-1THENPRINT"+CHR$(
34)+"READY TAPE, PRESS ENTER.."+
CHR$(34)+";:LINEINPUTZ$":GOSUB17
2
126Ø A$="PRINT"+CHR$(34)+"LOADIN
G "+CHR$(34)+";F$:OPEN"+CHR$(34)
+"I"+CHR$(34)+",DV,F$:FORI=1TOO:
INPUT#DV,LO(I):NEXT:INPUT#DV,L,T
URNS,CA":GOSUB172
127Ø A$="CLOSE:GOTO6ØØØØ":GOSUB1
72
1275 REM save
128Ø LN=V(7)+1Ø
129Ø A$="LINEINPUT"+CHR$(34)+"FI
LENAME FOR SAVING:"+CHR$(34)+";F
$":GOSUB172
13ØØ A$="IFLEN(F$)>8THENPRINT"+C
HR$(34)+"TOO LONG."+CHR$(34)+":G
OTO"+STR$(LN-1Ø):GOSUB172
131Ø A$="PRINT"+CHR$(34)+"TAPE O
R DISK? (T/D)":GOSUB172
132Ø A$="A$=INKEY$:IFA$="+CHR$(3
4)+CHR$(34)+"THEN"+STR$(LN)+" EL
SE A=INSTR("+CHR$(34)+"TD"+CHR$(
34)+",A$):IFA=ØTHEN"+STR$(LN)+"
ELSEIFA=1THENDV=-1 ELSEDV=1":GOS
UB172
133Ø A$="IFDV=-1THENPRINT"+CHR$(
34)+"READY TAPE, PRESS ENTER.."+
CHR$(34)+";:LINEINPUTZ$":GOSUB17
2
134Ø A$="PRINT"+CHR$(34)+"SAVING
 "+CHR$(34)+";F$:OPEN"+CHR$(34)+
"O"+CHR$(34)+",DV,F$:FORI=1TOO:P
RINT#DV,LO(I):NEXT:PRINT#DV,L,TU
RNS,CA":GOSUB172
135Ø A$="CLOSE:GOTO6ØØØØ":GOSUB1
72
1355 REM pclear zero
136Ø LN=6395Ø
137Ø A$="POKE&H3CØ,&H5F:POKE&H3C
1,&H5C":GOSUB172
138Ø A$="POKE&H3C2,&H96:POKE&H3C
3,&HBC":GOSUB172
139Ø A$="POKE&H3C4,&H1F:POKE&H3C
5,&HØ2":GOSUB172
14ØØ A$="POKE&H3C6,&H7E:POKE&H3C
7,&H96:POKE&H3C8,&HA3":GOSUB172
141Ø A$="EXEC&H3CØ:GOTO1":GOSUB1
72
9999 END
63949 'pclear zero
6395Ø POKE&H3CØ,&H5F:POKE&H3C1,&
H5C
6396Ø POKE&H3C2,&H96:POKE&H3C3,&
HBC
6397Ø POKE&H3C4,&H1F:POKE&H3C5,&
HØ2
6398Ø POKE&H3C6,&H7E:POKE&H3C7,&
H96:POKE&H3C8,&HA3
6399Ø EXEC&H3CØ:GOTO2Ø
```

Howard Medical Company

1690 N. Elston Chicago, Illinois 60622
(312) 278-1440

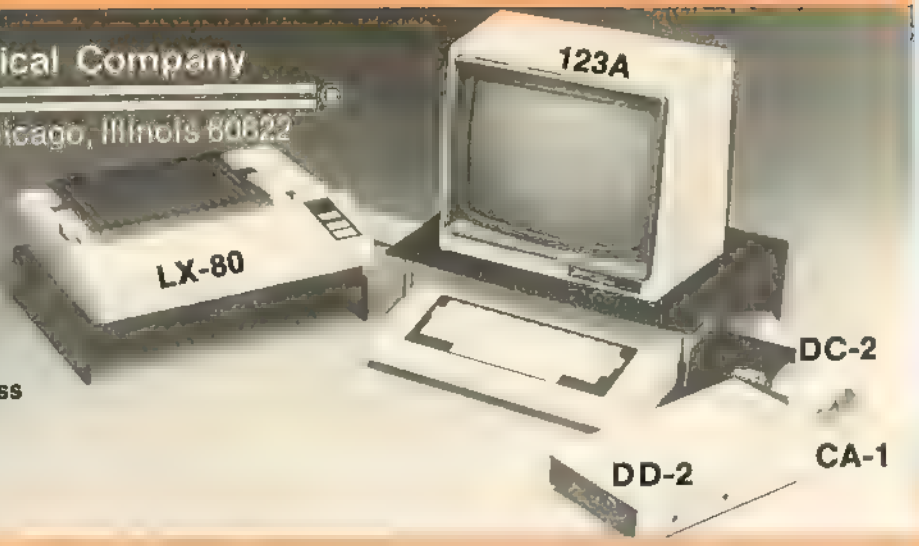

WE ACCEPT VISA
MasterCard
American Express
COD or Checks
School P.O.'s

New Dual Mode EPSON

The new Epson LX-80 offers printing flexibility in two modes: one mode allows you to print in a quick (100 cps) dot-matrix style for programming and graphics, and the Near Letter Quality mode (16 cps) produces precise (240 dots per inch), beautiful type for correspondence, reports, and similar purposes. The LX-80 offers 160 different type-style combinations, including Pica Elite, Enlarged, Emphasized, Condensed, Subscripts and Superscripts, and type-styles can be selected quickly from the top control panel or from program control. Comes standard in friction feed Tractor option is also available

LX-P package includes an LX-80, a serial interface, a Color Computer to Epson cable, and Printer Tutorial that teaches you how to program the different type styles ($29.95 value)

LX-P: LX-80 package $317 ($7 shpg)

ET-1 tractor option for LX-80. $29.50.

SF-1 Single-sheet feeder for the LX-80. $145 ($7 shpg)

Epson	RX-80 FT	repack	$207
Epson	LX-80 New		$249
Botek	Serial to parallel converter		$68.45
Howard	CoCo to Epson cable		$25

DM-1 Disk mailer holds from one to five diskettes 200 lb. cardboard construction 25 mailers/box — **$20.**

MONITORS

123 Zenith 12" Green Screen 640 dots x 200 dots resolution, 15 MHz band width. **$114** ($7 shpg)

123A Zenith 12" Green Screen Special, $67.50 ($7 shpg) 80 Column non glare

122 Zenith 12" Amber Screen, 640 dots x 200 dots resolution, 15 MHz band width **$117** (7 shpg)

141 Roland 13" Color Monitor with speaker 270 dots x 200 dots resolution, 4MHz band width **$247** ($12 shpg)

All monitors require video controller
Reverse video free with monitor order

MEMORY

64K Upgrades—1 Year Warranty

64-E1 for E Boards with complete instructions. Remove old chips and replace with preassembled package—no soldering or trace cuts **$28.45** ($2 shpg)

64-F1 for F Boards. No soldering needed. Capacitor leads must be cut **$24.45** ($2 shpg)

64-2 for COCO 2. Kit requires one solder point, no trace cuts. **$24.45** ($2 shpg)

CONTROLLERS

New Controller from J&M Has switch that allows either JDOS or RS DOS to be the disk operating system: eliminates software compatibility problems, while preserving the advantages of J&M's gold contacts and data separator. Also added to the DC-2 is a parallel port, which means a serial interface is no longer needed to make a parallel printer (like the Epson) work

DC-2 Disk Controller with JDOS **$128** ($2 shpg)

RS-1: RS DOS ROM Chip. $20.00 ($2 shpg)

DC-1 Disk Controller reads and writes to 35 and 40 track single and double-sided drives for *all* models of the Color Computer w/ JDOS. **$128** ($2 shpg)

VC-1 Video Interface mounts inside Color Computer by piggy-backing IC on top of interface—no soldering, no trace cuts. All models give composite video & sound **$24.45** ($2 shpg)

VC-2 for COCO 2—mono only **$26.45** ($2 shpg)

VC-3 for COCO 2—both color or monochrome **$39.45** ($2 shpg)

VC-4 for new Color Computer (no sockets, chips are soldered to mother board) Attaches with spring-loaded clips. Color or mono. **$39.45** ($2 shpg)

EPSON AND J&M

The EJ-P Package

The Epson LX-80 Printer teamed with our new J&M DC-2 Controller gives you top printing capabilities *plus* built-in switch gives JDOS or Radio Shack DOS so all software can run on your Color Computer. Package includes Epson LX-80 Printer with ET-1 tractor, DC-2 controller; parallel Color Computers to J&M cable; Epson Printer Tutorial ($29.95 value)

Complete EJ-P package $425.00 ($7 shpg)

DD-2	Double sided 360K disk with ½ height case & heavy duty power supply	$188
CA-1	Disk drive cable	$24.50
CA-2	Two drive cable	$34.50
DE-1	Disk enclosure ½ height with power supply	$58.

HOWARD QUALITY STANDS



New TS-1X Monitor Stand: Designer-beautiful stand with clear corner posts, easy side access to ROM port, reset and on/off buttons. **$39.50** ($3 shpg)

TS-1. Standard 13" monitor stand for the original Color Computer. Specify black, ivory or clear. 15" x11" x4" **$29.50** ($3 shpg)

TS-2: Same as above for the COCO 2. **$29.50** ($3 shpg)

PS-1X Printer Stand features new noise-suppressing foam top and cork base. 15" x11" x2½" **$24.95** ($3 shpg)

GUARANTEE

Howard Medical's 30-day guarantee is meant to eliminate the uncertainty of dealing with a company through the mail. Once you receive our hardware, try it out; test it for compatibility. If you're not happy with it for any reason, return it in 30 days and we'll give you your money back, (less shipping).

Hours: 8:00-4:00 Mon.-Fri
10:00-3:00 Sat

Software system requirements: CoCo with 1 disk, 32K RAM, 80-column printer
Add $2 for shipping

ORDERS (800) 443-1444

SOFTWARE CORNER

PAYROL/BAS	39.95	Automatically calculates FED & FICA and 3 additional user defined deductions. TABLES ARE ALREADY ENTERED
LEDGER	free with PAYROL/BAS	Prints checkbook with up to 30 user definable ledger numbers a $39/VALUE
STATE TAX	39.95	WITH PAYROL/BAS YOU WILL ALSO WANT Automatically calculates state withholding including graduated taxes. TABLES ALREADY ENTERED
941	29.95	Prints totals by quarter per employee ideal for Federal 941 and state unemployment
CHECKS		500 pin-feed checks specify blue green or brown $57.25
VIP LIBRARY	$125	Softlaw's integrated package includes VIP Write terminal, Database, Speller and CALC
SAP-1	19.95	Stock analysis program organizes your portfolio and gives specific sell & stop-loss points
BPA-1	19.95	Chart your blood pressure from daily readings taken in the comfort of your home.

The Biggest

The Best

The Indispensable

The RAINBOW
THE COLOR COMPUTER MONTHLY MAGAZINE

It's called the *premier Color Computer magazine* for good ason. **THE RAINBOW** is the biggest, best, brightest and most mprehensive publication a happy CoCo ever had! Is there any onder we get letters daily praising **THE RAINBOW**, the agazine one reader calls "A Pot Of Gold" for his Color omputer.

THE RAINBOW features more programs, more information id more in-depth treatment of the Tandy Color Computer than ny other source.

A monthly issue contains 260 or more pages and two dozen ograms, 15 regular columns and as many as 20 product views. And advertisements' **THE RAINBOW** is known as *the* edium for advertisers — which means every month it has a ealth of information unavailable anywhere else about new oducts! Hundreds of programs are advertised in its pages ach month

But what makes **THE RAINBOW** is its people. Nationa ly nown people like Bill Barden, who has written 27 books on omputer topics and writes for us each month Or, Fred Scerbo, ho writes special programs at the request of readers. Experts ke Dick White and Joseph Kolar, two of the most knowledge- ble writers on BASIC. Communicators like Marty Goodman and ray Augsburg, who stay abreast of telecommunications dvances. Or, Dan Downard, **RAINBOW** technical editor, who nswers our readers' toughest questions. Educators like Dr lichael Plog and Steve Blyn, who show how CoCo can be used t home or school Advanced programmers like Dale Puckett, ho guide you through the sophisticated OS-9 operating ystem. Electronics experts like Tony DiStefano, who explain ne "insides" of the CoCo. These people, and many others, visit ou monthly through columns available only in **THE RAINBOW**

Every single issue of **THE RAINBOW** covers the wide pectrum of interests in the Tandy Color Computer — from eginners' tutorials and arcade games to telecommunications nd business and finance programs. Helpful utilities and do-it- ourself hardware projects make it easy and fun to expand your CoCo's capabilities. And, monthly reviews by independent eader reviewers take the guesswork out of buying new software nd hardware products.

Join the tens of thousands who have found **THE RAINBOW** o be an absolute necessity for their CoCo. With all this going or it, is it surprising that more than 90 percent of **THE RAINBOW** ubscribers renew their subscriptions?

We're willing to bet that, a year from now, you'll be doing the ame. For more information call (502) 228-4492. Or, for *credit ard orders only*, you may call (800) 847-0309

Get Your Very Own Pot O' Gold!

Here's your chance to have a Pot O Gold full of programs, articles and nformation about CoCo every month of the year! A subscription to **THE RAINBOW** is only $31* and you won't m ss a s ngle chock ful issue

As the premier magazine for the Tandy Color Computer **THE RAINBOW** has more of everything — and greater variety, too Do yourself and your CoCo a favor and subscribe to **THE RAINBOW** today!

We accept VISA, MasterCard and Amer can Express Non U S rates h gher **U.S. currency *only*, please.**

YES! Sign me up for a year (12 issues) of **THE RAINBOW.**

☐ *NEW* ☐ *RENEW (Attach Label)*

Name _____

Address _____

City _____ *State* _____ *ZIP* _____

☐ Payment Enclosed (Payment must accompany order)

Charge ☐ VISA ☐ MasterCard ☐ American Express

Account Number _____

Signature _____ Card Expiration Date _____

For credit card orders you may wish to phone in your subscription our orders *only* number is (800) 847-0309 8 a m to 5 p m EST Al other nquiries please cal l (502) 228-4492

*Subscr ptions to **THE RAINBOW** are $31 a year in the United States Canadian rate is U S $38 Surface rate elsewhere is U S $68 Air mail U S $103 Al subscr ptions beg n with the current issue Please allow 4 to 6 weeks for first copy Kentucky residents add 5% sa es tax **In order to hold down non-editorial costs we do not bill.**

Rainbow On Tape Tops Typing

Tired of spend ng all your valuable computer time typ ng in those long, but wonderfu, **RAINBOW** programs each month? Now there s **RAINBOW ON TAPE** to help ease the pa n Each month all the lengthy programs (over 20 lines) in **THE RAINBOW** can come to you ready-to-run, thanks to **RAINBOW ON TAPE** At $80* per year or $10 a tape ** it is the biggest bargain going *(Note **RAINBOW ON TAPE** will not run on Dragon or MC 10 computers.)*

Back issues are avai able beginn ng with Apr l 1982 (except May 1983) Each month's tape will arrive at approx mately the same time as that month's issue of **THE RAINBOW**

RAINBOW ON TAPE is not a stand-alone product you will still need the magazine for loading and operating instruct ons and the necessary documentation **THE RAINBOW** magazine is a separate purchase

YES! Sign me up ☐ *NEW* ☐ *RENEW (Attach Label)*

☐ *A Full Year* ☐ *A Month (Specify Month & Year* _____ *)*

Name _____

Address _____

City _____ *State* _____ *ZIP* _____

☐ Payment Enclosed (Payment must accompany order)

Charge ☐ VISA ☐ MasterCard ☐ American Express

Account Number _____

Signature _____ Card Expiration Date _____

For credit card orders you may wish to phone in your subscription our orders *only* number is (800) 847-0309 8 a m to 5 p m EST Al other nquiries please cal l (502) 228-4492

*Subscr ptions to **THE RAINBOW ON TAPE** are $80 in the United States $90 U S funds n Canada and $105 U S funds in al other countries **In order to ho d down non-editorial costs we do not bill** Kentucky res dents add 5% sa es tax

** Individua back issues of the tapes are $10 in the United States, $12 U S funds for Canada and a l other countries

What goes well with *the Rainbow?*

Rainbow On Tape!

We call it the other side of **THE RAINBOW** and we may have to raise the price just to call your attention to it. With as many as two dozen programs every month, **RAINBOW ON TAPE** is a luxury service at a bargain basement price

What is it? **RAINBOW ON TAPE** is a monthly cassette tape adjunct to **THE RAINBOW** and it's brimming with al the programs (those over 20 lines long) that fill the pages of the magazine. All you do is pop the cassette in your tape recorder and they're ready to run. No more lost weekends — or week nights — typing, typing, typing. With **RAINBOW ON TAPE**, you can read the article in the magazine then, in seconds, you load it up and run it. Yes, you could type them in yourself, as many people do. But all of them? Every month? There simply isn't enough time.

Isn't it time your CoCo became a full-time computer instead of a typewriter? Think how your software library will grow. With your first year's subscription, you'll get almost 250 new programs: games, utilities, business programs, home applications — the full spectrum of **THE RAINBOW'S** offerings without the specter of keying in page after page and then debugging

RAINBOW ON TAPE — the "meat" of **THE RAINBOW** at a price that's "small potatoes." Food for thought. To get your first heaping helping, just fill out and return the attached reply card. No postage necessary

Discover the other side of **THE RAINBOW**. It's not only a time-saver, it's the key to a whole new outlook!

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO 1 PROSPECT, KY

POSTAGE WILL BE PAID BY ADDRESSEE

The RAINBOW
THE COLOR COMPUTER MONTHLY MAGAZINE

The Falsoft Building
P.O. Box 385
Prospect, KY 40059

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY CARD
FIRST CLASS PERMIT NO 1 PROSPECT, KY

POSTAGE WILL BE PAID BY ADDRESSEE

The RAINBOW
THE COLOR COMPUTER MONTHLY MAGAZINE

The Falsoft Building
P.O. Box 385
Prospect, KY 40059

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

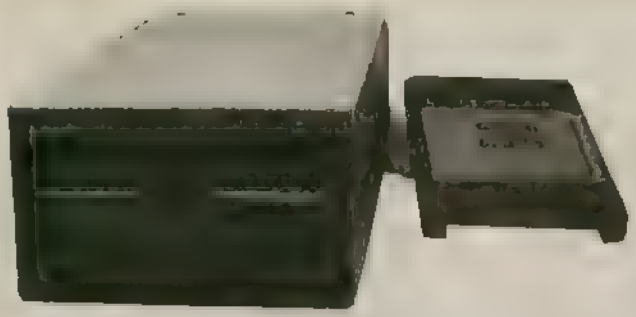

Drive 0 and 1 **269.95**

One double sided drive with doubler board and new RS controller so you can have the equivalent of 2 drives in one. You can even backup from 0 to 1. Works with all CoCo's.

AMBER MONITOR **59.95**

Epson's Comrex 5650 has a 12" screen with 900 lines. Resolution for 80 column text and 18 MHZ band width, retail price was 139.95. 13" Color Monitor (not shown), now only $139.95. These are new, in factory sealed cartons, NOT used, repacked, or refurbished. Add 7.00 s/h. Monitor Interface for any color Computer 29.95.

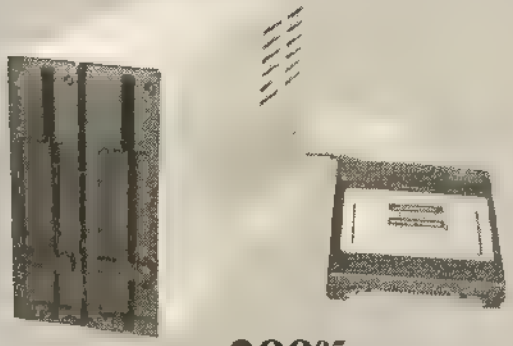

2 Drives **299.95**

Both our drive 0 and 1 in one case, with cable and R.S. controller. The best just got better!

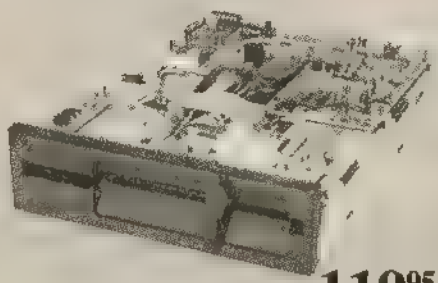

Drive 1 Upgrade **119.95**

Add a second ½ height drive to your Radio Shack® 26-3129. Comes with 3 minute installation instructions, screwdriver required. Double sided version (Drive 1 and 2) and doubler board add 79.00

Drive 1 **125.95**

Your Choice
Silver or White

199.95 Drive 0

SUPER DRIVE SALE

Special prices on new first quality disk drives. They even have GOLD connectors on the back Some other places charge 229.00 for dr. 1 and 299.00 for dr. 0, not us! Drive 1 is for mod I, Second Color Computer drive, or external mod III, IV. Drive 1 just plugs into the extra connector on your Drive 0 cable. Both drives are compatible with any version of the Color Computer and all versions of drives. Drive 0 is your first Color Computer drive and comes complete with cable, manual, and R S. controller. For double-sided drive and doubler board add 79 00 (for Drive 0 & 1 or 1 & 2). Bare full hgt SSDD drive only 79.95.

THE COMPUTER CENTER

901-761-4565, 5512 Poplar, Memphis, TN 38119

Add $4.90 for shipping and handling—Visa, MC & money orders accepted, No CODs

Allow an additional 2 weeks for personal checks—Drive faceplates may vary slightly

Prices subject to change without notice Radio Shack is a registered trademark of Tandy Corporation

An old favorite comes to the computer

Tic-Tac-CoCo

By James W. Wood

Polar Tic Tac Toe is more than the old standby game with the three-by-three grid. The game is played on the pattern in Figure 1.

To win this game a player must place his mark in four adjacent positions. These four may be in a semicircle within any of the four circles. Or the winning four marks can be in a straight line. This line of four may go through the center of the pattern.

In the computer version of this game, players place red and green sections on the original blue grid with their joysticks. The program keeps track of turns, recognizes a winning combination and keeps track of total wins for each player. The loser of one game gets to go first in the following game. There are a total of 52 ways to win the game. But don't get overconfident, there are also 52 ways to lose. Good luck. □

James Wood is in his fifteenth year of teaching at Atwood Hammond High School in Atwood, Illinois. His subjects include photography, physics, chemistry, computer programming and math courses. He holds master's degrees in both instructional media and physical science education.

Figure 1:
Examples of Winning Combinations

The listing: TICTACTO

```
10 REM JAMES W. WOOD, JAN 86
20 CLS:PRINT@40,"POLAR TIC TAC T
OE":PRINT:PRINT" USE JOYSTICK TO
 POSITION YOUR":PRINT"MARKER. PR
ESS BUTTON TO PLACE":PRINT"MARKE
R DOWN. FOUR IN A LINE":PRINT"OR
 FOUR IN A SEMICIRCLE WINS.":PRI
NT"AFTER A WIN, BOTH BUTTONS":PR
INT"MUST BE PRESSED TO CONTI
30 PRINT:INPUT"LEFT PLAYER'S NAM
E";LP$:PRINT"YOU WILL BE RED"
40 PRINT:INPUT"RIGHT PLAYER'S NA
ME";RP$:PRINT"YOU WILL BE GREEN"
50 FORT=1TO800:NEXTT
```

```
6Ø DIM D(32)
7Ø PMODE3,1:PCLS:SCREEN1,Ø:NP=Ø
8Ø RESTORE:COLOR2,1
9Ø FOR A=3Ø TO 9Ø STEP 2Ø
1ØØ CIRCLE(13Ø,1ØØ),A
11Ø NEXTA
12Ø DRAW"BM4Ø,1ØØR18ØL9ØNU9ØND9Ø
NE63NG63F63H126"
13Ø FOR A=1 TO 32:READ B,C
14Ø PAINT(B,C),3,2:NEXT A
15Ø DATA 68,48,124,16,136,16,192
,44,2Ø4,1Ø4,18Ø,156,84,156,48,1Ø
4
16Ø DATA68,96,124,36,136,36,176,
57,18Ø,1Ø5,16Ø,141,96,141,68,1Ø5
17Ø DATA 96,72,124,57,134,57,164
,72,16Ø,1Ø5,136,132,1Ø8,126,88,1
Ø5
18Ø DATA 1Ø8,87,124,78,136,75,14
8,87,14Ø,1Ø5,132,1Ø8,124,1Ø8,1Ø8
,1Ø5
19Ø IF JW=Ø THEN 23Ø
2ØØ NP=NP+1:IF NP=33 THEN 57Ø EL
SE COLOR2,1:LINE(3Ø,5Ø)-(4Ø,6Ø),
PSET,BF:COLOR1,1:LINE(215,5Ø)-(2
25,6Ø),PSET,BF:COLOR2,1:LINE(215
,5Ø)-(225,6Ø),PSET,B
21Ø JØ=JOYSTK(Ø)*4:J1=JOYSTK(1)*
3:P=PPOINT(JØ,J1):PSET(JØ,J1,2):
FORT=1TO2Ø:NEXTT:PSET(JØ,J1,P):I
F P<>3 THEN 21Ø
22Ø PE=PEEK(6528Ø):IF PE=126 OR
PE=254 THEN PAINT(JØ,J1),1,2:GOS
UB 27Ø ELSE 21Ø
23Ø NP=NP+1:IF NP=33 THEN 57Ø EL
SECOLOR4,1:LINE(3Ø,5Ø)-(4Ø,6Ø),P
SET,BF:COLOR2,1:LINE(215,5Ø)-(22
5,6Ø),PSET,BF
24Ø JØ=JOYSTK(Ø):JØ=JOYSTK(2)*4:
J1=JOYSTK(3)*3:P=PPOINT(JØ,J1):P
SET(JØ,J1,2):FORT=1TO2Ø:NEXTT:PS
ET(JØ,J1,P):IF P<>3 THEN 24Ø
25Ø PE=PEEK(6528Ø):IF PE=125 OR
PE=253 THEN PAINT(JØ,J1),4,2:GOS
UB 27Ø ELSE 24Ø
26Ø GOTO2ØØ
27Ø RESTORE:FOR A=1 TO 32
28Ø READ B,C:D(A)=PPOINT(B,C):NE
XT A
29Ø ' CHECK FOR CIRCLES
3ØØ FOR E=Ø TO 24 STEP 8:FOR A=1
 TO 5:AL=D(A+E)+D(A+1+E)+D(A+2+E
)+D(A+3+E)
31Ø IF AL=4 THEN GOTO 52Ø ELSE I
F AL=16 THEN 53Ø
32Ø NEXT A,E
33Ø FOR E=Ø TO 24 STEP 8
34Ø AL=D(6+E)+D(7+E)+D(8+E)+D(1+
E):IF AL=4 THEN GOTO 52Ø ELSE IF
 AL=16 THEN GOTO 53Ø
35Ø AL=D(7+E)+D(8+E)+D(1+E)+D(2+
E):IF AL=4 THEN GOTO 52Ø ELSE IF
 AL=16 THEN GOTO 53Ø
36Ø AL=D(8+E)+D(1+E)+D(2+E)+D(3+
E):IF AL=4 THEN GOTO 52Ø ELSE IF
 AL=16 THEN GOTO 53Ø
37Ø NEXT E
38Ø 'CHECK FOR LINES
39Ø FOR A=1 TO 8
4ØØ AL=D(A)+D(A+8)+D(A+16)+D(A+2
4):IF AL=4 THEN GOTO 52ØELSE IF
AL=16 THEN GOTO53Ø
41Ø NEXT A
42Ø FOR A=9 TO 12
43Ø AL=D(A)+D(A+8)+D(A+16)+D(A+2
Ø):IF AL=4 THEN GOTO 52Ø ELSE IF
 AL=16 THEN GOTO 53Ø
44Ø NEXT A
45Ø FOR A=13 TO 16
46Ø AL=D(A)+D(A+8)+D(A+16)+D(A+1
2):IF AL=4 THEN GOTO 52Ø ELSE IF
 AL=16 THEN GOTO 53Ø
47Ø NEXT A
48Ø FOR A=17 TO 2Ø
49Ø AL=D(A)+D(A+8)+D(A+12)+D(A+4
):IF AL=4 THEN GOTO 52Ø ELSE IF
AL=16 THEN GOTO 53Ø
5ØØ NEXT A
51Ø RETURN
52Ø GOSUB58Ø:CLS:SCREENØ,Ø:PRINT
:PRINTRP$;" WINS":RP=RP+1:JW=Ø:G
OTO 54Ø
53Ø GOSUB58Ø:CLS:SCREENØ,Ø:PRINT
:PRINTLP$;" WINS":LP=LP+1:JW=1:G
OTO 54Ø
54Ø PRINT:PRINT"TOTAL":PRINT:PRI
NTLP$,LP:PRINTRP$,RP
55Ø PRINT:PRINT"PRESS <ENTER> TO
 CONTINUE"
56Ø IF INKEY$=CHR$(13) THEN 7Ø E
LSE 56Ø
57Ø CLS:SCREENØ,Ø:PRINT:PRINT"NO
 WINNER":FORT=1TO8ØØ:NEXTT:GOTO7
Ø
58Ø FOR T=1TO1Ø:SCREEN1,1:FORTI=
1TO2Ø:NEXTTI:SCREEN1,Ø:FORTI=1TO
2Ø:NEXTTI,T
59Ø PE=PEEK(6528Ø)
6ØØ IF PE=124 OR PE=252 THEN RET
URN ELSE 59Ø
```

Prices Change Every Day. Please Call 1-800-343-8841 For Lower Prices

DEALER INQUIRIES INVITED

PRICE

Sizzling Summer Specials

Announcing MEGADISK PLUS +

Complete Systems! for the TRS 80 Model I/III/IV/4P, Color Computer, IBM-PC & AT, Max/80

Software Drivers: LDOS, NEWDOS/80, DOSPLUS, TRSDOS 6.x, CP/M available



Drive a 5 to 40 Megabyte Hard Bargain Starting at $399.95

REMOVEABLE CARTRIDGE Systems Now Available!!!

MEGAPLEX your Megadisk — 2 to 10 Port Systems

***Prices Start at a* LOW $199.95**

Models III/ IV 4P

Call Toll Free Ordering 1-800-343-8841

$259.95

Disk Drive Upgrade Kit
for Model III/IV easy to install system — no soldering.
Complete with controller, towers, power supply, 1 Half High Disk Drive, cables, and easy to follow instructions.
Second Drive $89.95

CANADIAN CUSTOMERS PLEASE CALL 514-383-5293

Software Support Inc. — MicroSmart Inc.

TERMS and CONDITIONS
All prices are cash discounted. However we do accept MC V SA, AMEX & DISCOVER credit cards C O D s are accepted No deposit required Purchase Orders Corporate, Government & School P O s are accepted Please call for details Shipping Costs are calculated per order Please call for total Shipments of all in stock products are made within 24 hours Same day service is available upon request no added cost Not responsible for typographical errors Terms and Specifications may change without notice

OUR NEW ADDRESS → 200 Homer Street Ashland MA 01721

OUR NEW COMPANY! ↑

1-617-872-9090

Hours Mon Fr 10 am to 5 30 pm est Sat 4 00 pm

Toll Free Ordering 1-800-343-8841

Dealer Inquiries Invited

Service & Returns It is our policy to repair all service returns within 24-48 hours Normally same day turnaround is accomplished It is necessary to have a (R)eturn Material (A)uthorization to insure speedy service

IBM, TAVA, COLUMBIA, 5151, COMPAQ, EAGLE, TRS-80, HEATH, ZENITH are registered trademarks of IBM Corp., Tava Corp., Columbia Computer Corp, Key Tronics Corp, Compaq Corp, Eagle Computer Tandy Corp, Zenith Corp, respectively

1986 Software Support Inc *All rights reserved*
1986 MicroSmart Inc *All rights reserved*

BREAKTHROUGH

DEALER INQUIRIES INVITED

Prices Change Every Day. Please Call 1-800-343-8841 For Lower Prices

MEGADISK™ HARD DISK DRIVE SYSTEMS

TOLL FREE ORDERING 1-800-343-8841

For the **IBM/PC**, Tandy 1000, **TRS/80 Models I/III/IV/4P**, Compaq, Tava, PC Workalikes **Color Computers**, Heath, Zenith, Max 80
Complete with Hardware, Cables, Software and Quikfit Installation

6 Megabytes Interna. Mount IBM/PC	Starting at $239.95
11 Megabytes Interna. Mount IBM/Tandy 1000	starting at 359.95
22 Megabytes Internal Mount IBM/Tandy 1000	starting at 469.95
6 Megabytes External System	starting at 399.95
10 Megabytes External System	starting at 599.95
20 Megabytes External System	starting at 749.95
Tape Backup System — Internal or External (IBM/PC)	starting at 449.95

WOW! NEW LOW PRICES
Call for unadvertised specials

DOS Drivers: IBM/Heath DOS. 1.0, 2.0, 2.1, 3.0, 3.1 or later
TRS/80-LDOS, TRSDOS 6.x, Newdos/80, Dosplus, CP/M, COCO DOS, Max/80 LDOS, OS9

FULLY WARRANTEED — PARTS AND LABOR

CALL TOLL FREE - 1-800-343-8841

FLOPPY DISK DRIVES, POWER SUPPLIES AND CABINETS

Our Disk Drives are UL approved. Our Floppy Drive Cabinets and Power Supplies are Underwriters Laboratory Listed and have passed the required Federal Communications Part 15 Section B FCC RFI tests.
Warranty on all disk drives is one full year parts and labor. Warranty on floppy disk drive power supplies is five (5) years. In warranty or out of warranty service is 24 hour turn-a-round on all disk drives and power supplies

Full Height Tandon

TM-1	Single Sided 40 tk Bare	$ [illegible]
	In Case w/ Power Supply	[illegible]
	Dual Drives in One Cabinet	[illegible]
TM-2	Dual Sided 40 tk Bare	[illegible]
	In Case w/ Power Supply	[illegible]
	Dual Drives in One Cabinet	[illegible]

Half High Drives

Single Sided 40 tk Bare	[illegible]
In Case with Power Supply	[illegible]
Dual Drives in One Cabinet	[illegible]
Dual Sided 40 tk Bare	**109.95**
In Case with Power Supply	**149.95**
Dual Drives in One Cabinet	**259.95**

Apple Franklin Disk Drives

35 DJ Track in Case with Cable and Software	[illegible]

COLOR COMPUTER DISK DRIVE SYSTEMS AND ADD IN PRODUCTS

40 Track Single Head Drive with Case, Power Supply, Cable	
Controller, Instruction Booklet, Diskettes	$199.95
Above with Dual Drives in One Cabinet	269.95
40 Track Dual Head with Case, Power Supply, Cable	
Controller, Instruction Booklet, Diskettes	**249.95**
Above with Dual Drives in One Cabinet	**359.95**
Dual DOS Switch	39.95
With Second DOS System, JDOS, RSDOS and Booklet	[illegible]

CALL FOR MODEM SPECIALS

Modem Special 300/1200.....$199.95

ALL IN STOCK ITEMS SHIPPED WITHIN 24 HOURS. SAME DAY SHIPPING PROVIDED BY REQUEST WITHOUT ANY EXTRA HANDLING CHARGES.

TURBO-M™ PC

CALL

800-343-8841

PRINTERS

Dot Matrix	
Citizen	[illegible]
Star Micronics SG Series	[illegible] $2[illegible]
Daisy Wheel	
Silver Reed 440, 80 cps, Serial, 20 CPS	[illegible]
Silver Reed 132 Column, 20 CPS	439.95
Juki 55 Qume, Sprint 5, 35 CPS	[illegible]
Qume Sprint 132 Column, 45 CPS WITH Tractor and Cable, Ltd.	[illegible]
Printer Cable	[illegible]
Printer Buffer, Microprocessor Controlled, 16K Stores	[illegible]

ELECTRICAL

Surge Protectors, Line Faders, Switched Outlet Strips	[illegible]
Uninterruptible Power Supplies	[illegible]

MISCELLANEOUS

Diskettes in 10 Pack	from $ 9.95
Tractor Sprockets	[illegible]
Disk Drive Cable	[illegible]
Manual Holders, Ring Binders	[illegible]
Printer Stands, Holders, Risers	[illegible]
Floppy Disk Drive Cables	
Apple	[illegible]
Atari	[illegible]
Leading Zenith Drive Cables, Specified	[illegible]

Software Support Inc. — MicroSmart Inc.

TERMS and CONDITIONS
All prices are cash discounted. However we do accept MC, VISA, AMEX & DISCOVER credit cards. C.O.D.'s are accepted. No deposit required. Purchase Orders-Corporate, Government & School P.O.'s are accepted. Please call for details. Shipping Costs are calculated per order. Please call for total. Shipments of all in-stock products are made within 24 hours. Same day service is available upon request — no added cost. Not responsible for typographical errors. Terms and Specifications may change without notice.

OUR NEW ADDRESS → 200 Homer Street Ashland MA 01721 ← OUR NEW COMPANY!

1-617-872-9090

Hours: Mon.-Fri. 10 am to 5:30 pm (est) Sat. 4:00 pm

Toll Free Ordering 1-800-343-8841

Dealer Inquiries Invited

Service & Returns: It is our policy to repair all service returns within 24-48 hours. Normally same day turn-around is accomplished. It is necessary to have a Return Material Authorization to ensure speedy service.

IBM, Tava, COLUMBIA, 5151, COMPAQ, EAGLE, TRS/80, HEATH/ZENITH are registered trademarks of IBM Corp., Tava Corp., Columbia Computer Corp., Key Tronics Corp., Compaq Corp., Eagle Computer, Tandy Corp., Zenith Corp., respectively.
1988 Software Support, Inc. *All rights reserved.*
1988 MicroSmart, Inc. *All rights reserved.*
TURBO M ... of MicroSmart Inc.

An educational game to encourage mastery of word concepts

Which Nym Is Witch?

By Brien Dick

When the first CoCos arrived in our school I was thrilled. However, the software we ordered hadn't arrived and the class needed something to use. This was the perfect opportunity for me to learn BASIC. It was one of my fourth-graders, Jody Eason, who came up with the idea to make a program like the matching games they played in class. *Nymatch* was born.

Matching games are popular learning tools. Drill and practice becomes fun. The cards are placed face down. Pick two cards and, if they match, you keep them and go again. The winner is the one with the most sets. Add the CoCo and you have an automatic answer checker.

Nymatch can be used in any subject. All you need are two ideas that share a relationship. In history one such pair could be Washington and first President. In math it could be 5+5 and 10. For my subject I chose reading. More specifically, Nyms. What are Nyms? I use Nyms as a broad category of words made up of synonyms, antonyms and homonyms. Synonyms are words that have the same meaning (woods/forest). Antonyms are words that have the opposite meaning (hot/cold). Homonyms are more confusing. Homonyms are broken down into two types: homophones and homographs. Homophones are two words that sound alike but are spelled differently (deer/dear). Homographs sound differently, but are written the same. Read can be pronounced reed or red.

Having a firm foundation in word concepts is an important link between reading words and understanding the material. Reading some articles in THE RAINBOW can be frustrating to those unfamiliar with the topic. Understanding what the words mean in the context of the article is essential. One way to strengthen vocabulary is to study how words relate to other words. That is the reason so much time is spent on Nyms in school. That is the goal of *Nymatch*.

Nymatch works on 16K non-Extended BASIC. Just type it in, save and run it. If you own Extended BASIC and get an OM Error, just PCLEAR 1 before running.

Although the game targets grades three through six, it is valuable for you as a parent to play with your child. Your child may not be able to "sound out" some words. Others may be used in a new way. Your help early on can make a big difference in how fast your child masters the vocabulary in *Nymatch*. Many children at this level are just beginning to learn problem-solving strategies needed in locating matched pairs. For them, the game is reduced to a guessing game. Playing with a parent gives them examples of other strategies.

Since this game is so versatile, you can add your own sets of matched pairs. Making changes is not hard. You need only modify two areas; the DATA statements and the submenu explaining the

Table 1

Lines	Function
10- 220	Title and set-up
230- 270	Game loop
360- 530	Record keeping
540- 630	Game subroutine
640- 760	Examples & directions
770-1330	Manipulate choices
1340-1380	Fancy print routine
1390-1430	Border & delay routines
1440-1720	Homonym card set
1730-2020	Antonym card set
2030-2320	Synonym card set

Brien Dick lives with his wife and three sons in Rensselaer, Indiana. He has a master's degree in education and teaches fourth grade. His hobbies include writing programs for his sons and the classroom.

nformation. If you have 16K, there is ot enough room to add any games. ou will have to replace any set of cards vith your own sets. Those with more nemory can add to *Nymatch*.

Add your game to the main menu in ines 550 to 590. Don't forget to adjust he ON/GOTO line numbers in Line 70. f you are adding more games, change ine 620. Add one to the five for each dded game.

You will need a set of 30 matched pairs for the DATA lines at the end of the program. Each DATA line holds the matched pair and its ID number. Remember that each set of 30 pairs must be in the same order as in the menu.

Final Notes

I hope your child enjoys *Nymatch*. Learning can and should be enjoyable whenever possible. Our CoCo proves that over and over again. Isn't that why most of us bought one in the first place?

Drop me a line if you are using a CoCo in your school. I'd like to hear from you, and I'm willing to help with problems you have. Just send a description of the problem with a listing, if you have a printer.

(You may direct your questions to the author at 112 South Milton, Rensselaer, IN 47978. Please enclose an SASE when writing.) □



The listing: NYMATCH

```
1Ø 'COPYRIGHT 1983 BY BRIEN DICK
2Ø CLEAR2ØØ:CLS3:CO=185:GOSUB139
Ø
3Ø DIM W(24,3),C$(24),C(24),P$(2
4),P(4),D(24)
4Ø TI$="NYMATCH":LO=1Ø8:GOSUB135
Ø
5Ø TI$="CREATED BY: BRIEN DICK":
LO=294:GOSUB 135Ø
6Ø GOSUB143Ø:GOSUB36Ø:GOTO54Ø
7Ø ON CH GOTO64Ø,67Ø,7ØØ,73Ø
8Ø GOSUB139Ø:K=5
9Ø A$=CHR$(143+((K-1)*16))
1ØØ B$=A$+A$+A$
11Ø C$=CHR$(175):D$=CHR$(191)
12Ø E$=CHR$(128)+CHR$(128)+CHR$(
128)
13Ø FORX=1TO15
14Ø C1$=C1$+C$:D1$=D1$+D$:NEXTX
15Ø FOR A=1TO24
16Ø W(A,1)=28+L+(A*4)
17Ø W(A,2)=6Ø+L+(A*4)
18Ø W(A,3)=92+L+(A*4)
19Ø IF A=8 OR A=16 THEN L=L+96
2ØØ NEXT A
21Ø IFCH=1THENGOSUB1Ø4ØELSEGOSUB
1Ø3Ø
22Ø LO=419:GOSUB134Ø:INPUTX:CLSØ
23Ø FORA=1TO24
24Ø FORB=1TO3
25Ø PRINT@W(A,B)-32,B$;
26Ø IFB=1THENPRINT@W(A,B)-32,CHR
$(64+A);
27Ø NEXTB,A
28Ø FORPL=1TOP
29Ø R=Ø:GOSUB 77Ø:GOSUB 8ØØ
3ØØ GOSUB45Ø:GOSUB83Ø:GOSUB77Ø
31Ø GOSUB8ØØ:IFR=1THEN29Ø
32Ø NEXTPL:GOTO28Ø
33Ø GOSUB5ØØ:CO=185:GOSUB 139Ø
34Ø TI$="ANOTHER GAME (Y/N)? ":L
O=422:GOSUB135Ø
35Ø Y$=INKEY$:IFY$="Y"THENRUNELS
EIFY$="N"THENCLS:ENDELSE35Ø
36Ø TI$="HOW MANY PLAYERS (1-4)"
:LO=388:GOSUB135Ø
37Ø INPUTP
38Ø IF P>5THENTI$="too many play
ers":LO=388:GOSUB135Ø:GOSUB 143Ø
:GOTO36Ø
39Ø CLS4:CO=169:GOSUB139Ø
4ØØ PRINT@96,"";:FORH=1TOP
41Ø TI$="WHO IS PLAYER #"+STR$(H
):LO=32*H:GOSUB135Ø
42Ø INPUT P$(H)
43Ø IFLEN(P$(H))>15THENPRINT"ple
ase shorten your name";:GOTO42Ø
44Ø NEXTH:RETURN
45Ø PRINT@398-INT(LEN(P$(PL))/2)
," "P$(PL)" ";
46Ø PRINT@451,"PRESS <SPACEBAR>
TO PLAY";
47Ø T$="":T$=INKEY$
48Ø IFT$<>" "THEN47Ø
49Ø GOSUB77Ø:GOSUB8ØØ:RETURN
5ØØ CLS3:GOSUB139Ø:TI$="scoreboa
rd":LO=75:GOSUB135Ø
51Ø FORH=1TOP:LO=73+(64*H):TI$=S
TR$(P(H))+"  "+P$(H):GOSUB135Ø:N
EXTH
52Ø GOSUB143Ø:RETURN
53Ø P(PL)=P(PL)+2:R=1:RETURN
54Ø CO=42:CLS2:GOSUB139Ø
55Ø TI$="WHICH GAME DO YOU WANT"
:LO=133:GOSUB135Ø
56Ø PRINT@ 234,"HOMONYM  (1)";
57Ø PRINT@ 298,"ANTONYM  (2)";
58Ø PRINT@ 362,"SYNONYM  (3)";
59Ø PRINT@423,"DIRECTIONS  (4)";
6ØØ PRINT@155,"?";
61Ø CH$=INKEY$:C=C-1:IFCH$=""THE
N61Ø
62Ø IFVAL(CH$)>Ø AND VAL(CH$)<5T
```

Radio Shack has the

Computer System Furniture

299.00 Reg. Separate Items 319.80

Spacious modular workstation is ideal for home or office. Features simulated oak finish. Easy to assemble.

A System Desk. Twin cable management slots for easy connections.
26-1356 . . . . . 119.95

B Storage Hutch. Mounts on system desk. Features adjustable "second shelf" on either side.
26-1359 . . . . . 59.95

Half-Width Hutch. (Not shown). 26-1374 . . . 54.95

C Corner Section. Connects system desk and printer stand for a convenient "work corner."
26-1358 . . . . . 39.95

D Printer Stand. With output paper catcher and storage shelf.
26-1357 . . . . . 99.95

Monitor Pedestal

16.95

Adjustable platform rotates and tilts. Holds all Tandy monitors. Color and finish match monitors. Base: 11×10¼".
(26-1369)

Printer Supports

16.95

Elevates printer so fanfold paper can be placed underneath. Use with 80-column printers. Durable crystal polystyrene. Easy to assemble.
(26-1367)

Diskette Storage

Low As **12.95**

3½". Holds 30.
26-1381 . . . . . 12.95

5¼". Holds 50.
26-1362 . . . . . 14.95

8". Holds 50.
26-4953 . . . . . 24.95

Disk Drive Head Cleaning Kits

Low As **7.95** Each

Disk Size	Cat. No.	Each
*3½"	26-419	9.95
5¼"	26-408	7.95
8"	26-4957	8.95

*Single sided only

Fanfold Printer Paper



Size	Parts	Design	Vertical	Qty	Cat. No.	Price
14⅞ x 11"	1	Greenbar	No	500	26-1330	11.95
14⅞ x 11"	1	Greenbar	No	1500	72-300	34.95
14⅞ x 11"	1	Greenbar	No	3500	26-1417	69.95
14⅞ x 11"	1	White	No	1500	72-303	34.95
9½ x 11"	1	Greenbar	Yes	1500	72-304	24.95
9½ x 11"	1	Greenbar	Yes	3500	26-1403	49.95
9½ x 11"	1	White	Yes	500	26-1423	8.95
9½ x 11"	1	20# White	Yes	500	26-1387	10.95
9½ x 11"	1	20# White	Yes	1250	26-1427	24.95
9½ x 11"	1	20# White	Yes	2500	72-311	44.95
9½ x 11"	2	White	Yes	750	72-305	34.95

Mailing Labels

Pressure-Sensitive Fanfold

Low As **6.95**

1-Wide. 4½" carrier. Pkg./1000. 26-1328 . . . . . 6.95
1-Wide. 4½" carrier. Pkg./5000. 72-402 . . . . . 24.95
2-Wide. 9½" carrier. Pkg./2000. 72-401 . . . . . 15.95
3-Wide. 9½" carrier. Pkg./3000. 72-400 . . . . . 16.95
2-Wide. Dry gum. 9½" carrier. Pkg./2400. 26-1456 . . . 9.95

Items Shown With Optional Computer Components (Not Included)

best of everything.

Low-Cost, Compact Computer Workcenter

89.95

- **Organize Your Computer System With This Compact, Efficient Workstation**
- **Beautifully Designed and Finished to "Fit In" with Other Furniture**

Our beautifully styled, simulated oak finish workcenter features a full-width monitor shelf (41 1/2 × 14 3/4"), space for computer and printer, plus plenty of workspace. This easy-to-assemble workcenter comes with adjustable glides. (26-1350)

Perfect for Home, Office or School

Data Communications Modem

59.95

DCM 3. 300-bps modem plugs directly into modular phone outlet. DB25 and 4-pin DIN connectors Bell 103 compatible, full duplex. FCC registered. (26-1178)

Certified Unformatted Diskettes



- **Double Density**
- **Manufactured to the Highest Standards of Excellence**
- **Buy in 10-Pack Quantities and Save**

Single Sided

Size	Tracks	Quantity	Cat. No.	Price
3 1/2"	80	3	26-415	15.95
	80	10	26-416	44.95
5 1/4"	40	1	26-305	2.19
	40	3	26-405	5.95
	40	10	26-406	15.95
8"	77	3	26-4904	10.95
	77	10	26-4906	34.95

Double Sided

Size	Tracks	Quantity	Cat. No.	Price
5 1/4"	40	3	26-411	5.95
	40	10	26-412	16.95
	80	3	26-409	8.95
	80	10	26-410	24.95
	80(high density)	3	26-421	15.95
		10	26-422	44.95
8"	77	3	26-4961	12.95
	77	10	26-4960	39.95

Radio Shack®
The Technology Store™
A DIVISION OF TANDY CORPORATION

Send me an RSC-17 Computer Catalog.

Radio Shack
Dept. 87-A-20
300 One Tandy Center
Fort Worth, Texas 76102

Name _____
Address _____
City _____
State _____ ZIP _____
Phone _____

Prices apply at Radio Shack Computer Centers and participating stores and dea ers.

```
HEN CH=VAL(CH$)ELSE54Ø
63Ø X=RND(C):GOTO7Ø
64Ø CLS:PRINT@7Ø,"homophone matc
h up";
65Ø PRINT@131,"HOMOPHONES ARE WO
RDS THAT       SOUND THE SAME  A
ND HAVE        DIFFERENT SPELLIN
GS.";
66Ø PRINT@259,"samples: SENT/CEN
T                      BYE/BY";
:GOTO8Ø
67Ø CLS:PRINT@7Ø,"antonym match
up";
68Ø PRINT@131,"ANTONYMS ARE WORD
S WITH         OPPOSITE MEANINGS
.";
69Ø PRINT@259,"samples: WALK/RUN
                       SAME/DIF
FERENT";:GOTO8Ø
7ØØ CLS:PRINT@7Ø,"synonym match
up";
71Ø PRINT@131,"SYNONYMS ARE WORD
S WITH         THE SAME MEANINGS
.";
72Ø PRINT@259,"samples: LEAVE/GO
                       ALL/EVER
Y";:GOTO8Ø
73Ø CLS5:PRINT@75,"directions";
74Ø PRINT@128,"   NYMATCH IS A W
ORD GAME AND       A MEMORY GAME
IN ONE."
75Ø PRINT@224,"   YOU WILL BE GI
VEN A SET OF       24 CARDS. CHOO
SE 2 CARDS         THAT MATCH AND
 YOU EARN          THOSE CARDS AN
D MAY HAVE         ANOTHER TURN."
76Ø GOSUB139Ø:LO=453:GOSUB134Ø:I
NPUTX:GOTO54Ø
77Ø FORX=ØTO4
78Ø PRINT@352+(X*32),C1$;CHR$(12
8);
79Ø NEXTX:RETURN
8ØØ FOR X=ØTO4
81Ø PRINT@352+16+(X*32),D1$;
82Ø NEXTX:RETURN
83Ø T$="":T$=INKEY$
84Ø PRINT@421,"1ST CARD";
85Ø IFT$=""THEN83Ø
86Ø IFASC(T$)<65ORASC(T$)>88THEN
83Ø
87Ø GOSUB98Ø
88Ø IFW(ASC(T$)-64,1)=ØTHEN83Ø
89Ø GOSUB77Ø:GOSUB112Ø:GOSUB1Ø9Ø
9ØØ T1$="":T1$=INKEY$
91Ø PRINT@437,"2ND CARD";
92Ø IFT1$=""THEN9ØØ
93Ø IFASC(T1$)<65ORASC(T1$)>88TH
EN9ØØ
94Ø IFASC(T$)=ASC(T1$)THEN9ØØ
95Ø IFW(ASC(T1$)-64,1)=ØTHEN9ØØ
96Ø GOSUB116Ø:GOSUB8ØØ
97Ø GOSUB99Ø:GOSUB12ØØ:RETURN
98Ø T=ASC(T$)-64:RETURN
99Ø T1=ASC(T1$)-64:GOSUB11ØØ
1ØØØ IFC(T)=C(T1)THENGOSUB53Ø
1Ø1Ø IFC(T)=C(T1)THENGOSUB127Ø
1Ø2Ø RETURN
1Ø3Ø FORX=1TO3Ø*(CH-1):READZ$,Z,
Y$,Y:NEXTX
1Ø4Ø J=RND(18):IFJ=1THEN1Ø5ØELSE
FORX=1TOJ*4:READJ$:NEXTX
1Ø5Ø FORF=1TO24
1Ø6Ø J=RND(24)
1Ø7Ø IFD(J)=1THEN1Ø6ØELSED(J)=1
1Ø8Ø READC$(J):READ C(J):NEXT:RE
TURN
1Ø9Ø PRINT@388,C$(T);:RETURN
11ØØ PRINT@388+16,C$(T1);
111Ø GOSUB143Ø:RETURN
112Ø FORB=1TO3
113Ø PRINT@W(ASC(T$)-64,B)-32,C$
+C$+C$;
114Ø IFB=1THENPRINT@W(ASC(T$)-64
,1)-32,T$;
115Ø SOUND6Ø*B,1:NEXTB:RETURN
116Ø FORB=1TO3
117Ø PRINT@W(ASC(T1$)-64,B)-32,D
$+D$+D$;
118Ø IFB=1THENPRINT@W(ASC(T1$)-6
4,1)-32,T1$;
119Ø SOUND6Ø*B,1:NEXTB:RETURN
12ØØ IFW(ASC(T$)-64,1)=ØTHENRETU
RN
121Ø FORB=1TO3
122Ø PRINT@W(ASC(T$)-64,B)-32,B$
;
123Ø IFB=1THENPRINT@W(ASC(T$)-64
,1)-32,T$;
124Ø PRINT@W(ASC(T1$)-64,B)-32,B
$;
125Ø IFB=1THENPRINT@W(ASC(T1$)-6
4,B)-32,T1$;
126Ø NEXTB:RETURN
127Ø FORB=1TO3
128Ø SOUND INT(5Ø/B),1
```


CoCo Trend

Computerware

Name brand software
at least 20% off
suggested retail

Prickly Pear

15001 Glory Dr. Huntsville, AL 35803
(205) 880-COCO (2626)
Call or write for free catalog.

```
129Ø PRINT@W(T,B)-32,E$;
13ØØ PRINT@W(T1,B)-32,E$;
131Ø W(T,B)=Ø:W(T1,B)=Ø:NEXTB
132Ø X1=X1+1:IFX1=12THEN33Ø
133Ø GOSUB143Ø:RETURN
134Ø TI$="PRESS <ENTER> TO PLAY"
135Ø FORX=1TOLEN(TI$)
136Ø PRINT@LO,LEFT$(TI$,X);
137Ø SOUND1ØØ+(X*2),1
138Ø NEXT:RETURN
139Ø FORX=1Ø24TO1Ø55:POKEX,CO:NE
XT
14ØØ FORX=1Ø24TO15Ø4STEP32:POKE
X,CO:NEXT
141Ø FORX=15Ø4TO1535:POKEX,CO:NE
XT
142Ø FORX=1Ø55TO1535STEP32:POKEX
,CO:NEXT:RETURN
143Ø FORD=1TO14ØØ:NEXT:RETURN
144Ø DATA FOUR,1,FOR,1
145Ø DATA ATE,2,EIGHT,2
146Ø DATA EYE,3,I,3
147Ø DATA BARE,4,BEAR,4
148Ø DATA DEAR,6,DEER,6
149Ø DATA DAYS,7,DAZE,7
15ØØ DATA CITE,8,SITE,8
151Ø DATA CHORD,9,CORD,9
152Ø DATA CENT,1Ø,SENT,1Ø
153Ø DATA AUNT,11,ANT,11
154Ø DATA BLEW,12,BLUE,12
155Ø DATA AIR,13,HEIR,13
156Ø DATA DEW,14,DO,14
157Ø DATA DOE,15,DOUGH,15
158Ø DATA HAIR,16,HARE,16
159Ø DATA GRATE,17,GREAT,17
16ØØ DATA HAIL,18,HALE,18
161Ø DATA NEW,19,KNEW,19
162Ø DATA HAY,2Ø,HEY,2Ø
163Ø DATA CREEK,21,CREAK,21
164Ø DATA KNIGHT,22,NIGHT,22
165Ø DATA KNOT,23,NOT,23
166Ø DATA SON,24,SUN,24
167Ø DATA STEAK,25,STAKE,25
168Ø DATA SEW,26,SOW,26
169Ø DATA SHOOT,27,CHUTE,27
17ØØ DATA SCENE,28,SEEN,28
171Ø DATA RIGHT,29, WRITE,29
172Ø DATA ROTE,3Ø,WROTE,3Ø
173Ø DATA POOR,1,RICH,1
174Ø DATA RARE,2,COMMON,2
175Ø DATA QUIT,3,CONTINUE,3
176Ø DATA PROPER,4,IMPROPER,4
177Ø DATA SAME,5,DIFFERENT,5
178Ø DATA SAFE,6,DANGEROUS,6
179Ø DATA ILL,7,HEALTHY,7
18ØØ DATA POWERFUL,8,WEAK,8
181Ø DATA PROUD,9,ASHAMED,9
182Ø DATA FILL,1Ø,EMPTY,1Ø
183Ø DATA UNITE,11,DIVIDE,11
184Ø DATA GATHER,12,SCATTER,12
185Ø DATA CRUEL,13,KIND,13
186Ø DATA EVIL,14,GOOD,14
187Ø DATA ASLEEP,15,AWAKE,15
188Ø DATA REPAIR,16,DESTROY,16
189Ø DATA RAPID,17,SLOW,17
19ØØ DATA POLITE,18,RUDE,18
191Ø DATA QUESTION,19,ANSWER,19
192Ø DATA NONE,2Ø,SOME,2Ø
193Ø DATA YOUTHFUL,21,OLD,21
194Ø DATA BALD,22,HAIRY,22
195Ø DATA AVERAGE,23,UNUSUAL,23
196Ø DATA CHEAP,24,EXPENSIVE,24
197Ø DATA BEFORE,25,AFTER,25
198Ø DATA BRIEF,26,LONG,26
199Ø DATA FALSE,27,TRUE,27
2ØØØ DATA DOUBT,28,BELIEVE,28
2Ø1Ø DATA DIRTY,29,CLEAN,29
2Ø2Ø DATA LIGHT,3Ø,DARK,3Ø
2Ø3Ø DATA KILL,1,MURDER,1
2Ø4Ø DATA LIKE,2,ENJOY,2
2Ø5Ø DATA LITTLE,3,TINY,3
2Ø6Ø DATA MEAN,4,UNKIND,4
2Ø7Ø DATA NEAR,5,CLOSE,5
2Ø8Ø DATA MIX,6,BLEND,6
2Ø9Ø DATA SLEEP,7,DOZE,7
21ØØ DATA REAL,8,TRUE,8
211Ø DATA SECRET,9,HIDDEN,9
212Ø DATA SICK,1Ø,ILL,1Ø
213Ø DATA EXCITED,11,THRILLED,11
214Ø DATA ZERO,12,NONE,12
215Ø DATA TOTAL,13,WHOLE,13
216Ø DATA TOUGH,14,HARD,14
217Ø DATA USUAL,15,REGULAR,15
218Ø DATA COUCH,16,SOFA,16
219Ø DATA HAPPY,17,GLAD,17
22ØØ DATA HEAL,18,CURE,18
221Ø DATA DEPART,19,LEAVE,19
222Ø DATA DAMAGE,2Ø,RUIN,2Ø
223Ø DATA FAKE,21,FALSE,21
224Ø DATA EASY,22,SIMPLE,22
225Ø DATA ADORE,23,LOVE,23
226Ø DATA CLOSE,24,SHUT,24
227Ø DATA BATTLE,25,FIGHT,25
228Ø DATA HARD,26,ROUGH,26
229Ø DATA FAST,27,SWIFT,27
23ØØ DATA DRAG,28,PULL,28
231Ø DATA CONFESS,29,ADMIT,29
232Ø DATA FIX,3Ø,REPAIR,3Ø
```

TOM MIX'S MINI-CATALOG



P-51 Mustang Attack/Flight Simulation

The ultimate video experience! Link two CoCo's together by cable or modem, and compete against your opponent across the table OR across the country! (Both computers require a copy of this program) The P-51 flight simulator lets you fly this WWII attack fighter in actual combat situations—against another player OR against the computer

32K Machine Language
Flight Manual Included
Tape $29.95 Disk $34.95



Worlds of Flight Small Plane Simulation

Real-time simulation generates panoramic 3-D views of ground features as you fly your sophisticated plane in any of nine different "worlds." Program models over 35 different aircraft/flight parameters. Realistic sound effects too! Manual included helps you through a typical short flight.

32K Machine Language
Flight Manual Included
Joysticks Required
Tape $29.95 Disk $34.95

Educational Best-Sellers!

Teachers Database II—Allows teachers to keep computerized files of students. Recently updated with many new features!

- Up to 100 students, 24 items per student
- Many easy-to-follow menus
- Records can be changed, deleted, combined
- Statistical analysis of scores
- Grades can be weighed, averaged, percentaged
- Individual progress reports
- Student seating charts
- Test result graphs/grade distribution charts

64K TDBII $59.95 Disk Only
32K TDBI $42.95 Tape $39.95

Fractions—A Three-Program Package 1/Mixed & Improper 2/Equivalence 3/Lowest Terms. Practice, review and definitions make learning easy.

32K Ext. Basic
Tape $30.95 Disk $35.95

Factpack—Three programs for home or school use provide drill and practice with basic "-/+/ /x" Grades 1-6

32K Ext. Basic
Tape $24.95 Disk $29.95

Vocabulary Management System—Helps children learn and practice using vocabulary and spelling words. Eleven programs including three printer segments for tests, puzzles, worksheets and five games; many features make this a popular seller!

Requires 16K Ext. Basic/
32K for Printer Output
Tape $39.95 Disk $42.95

Math Duel—A challenging math game that pits you against the computer in a game of wits. Use your knowledge of factors, multiples and prime numbers to gather points against your CoCo.

32K Ext. Basic
Tape $30.95 Disk $35.95



Approach Control Simulation From Betasoft Systems.

"Caught in a blinding snowstorm, two jet airliners are on a collision course. The pilots are unaware of the imminent danger. Hundreds of lives are at stake. A high-speed disaster is inevitable unless you act fast..." This and many other exciting scenarios await you as an Air Traffic Controller. The thrills, challenges and frustrations you'll experience with this authentic, real-time simulation will give you countless hours of discovery and adventure.

32K Machine Language
Tape $29.95 Disk $34.95

Unique Utilities!

New! Use the tools we've used to create "Donkey King," "Sailor Man" and others!

- Full use of 64K RAM
- 100% Machine Language
- No ROM Calls
- Selectable Drive
- Support 1-4 drives
- Menu Selected functions
- "Cold Start" exit to Basic
- Parameters easily changeable in basic loader

MAS Assembler—the finest ever! (Includes EDT)

Disk $74.95

EDT—Effortless full screen editing w/2-way cursor. Text files to 48K+. Copy, save, move, delete, print blocks, much more!

Disk $39.95

Deputy Inspector—Alphabetize, resort and backup directory; fast 3-swap backups, copy files or programs, auto-reallocate granules during backup for faster loading, more!

Disk $21.95

Sector Inspector—Alphabetize, backup and print directory; repair crashes, LLIST basic programs, read in and edit 23+ grans, much more!

Disk $29.95

We Have More Software Available Than Listed Here. Please Write for a Free Catalog!

New! Tandy 1000/1200/3000-IBM/PC-Compatable Software!

Inventory Mate—General purpose inventory program suitable for a variety of applications. Inventory turnover and transactions are kept on permanent record. Has automatic item count adjustment when shipping or receiving. Also generates reports suitable for many uses! **$79.95**

Postal Express—Lightning-fast general purpose mail program for home, small business. Each file stores up to 500 entries; in-memory storage for quick operation; automatic selective printing options using global search and categorizing features; Zip Code ordering, alphabetizing, accepts 9-digit and foreign Zips as well! **$49.95**

Special Delivery—Comprehensive mail list program for businesses, featuring versatility found only in much more expensive packages! Up to 2000 entries held in each file; additional address line can be placed anywhere in the individual mailing label; categorize and print entries according to custom needs; Zip Code ordering, alphabetizing, uses 9-digit and foreign Zips, too! **$79.95**

More Tandy-IBM/PC software available.

TOM MIX SOFTWARE
4285 Bradford N.E.
Grand Rapids, MI 49506
616/957-0444

Ordering Information

- Call us at 616/957-0444 for Charge Card orders
- Add $3.00 postage and handling
- MI residents add 4% sales tax
- Authors—We pay top royalties!

MasterCard
VISA

Look What's New at NOVASOFT!

Top-quality software at affordable prices, written by well-known authors in 6809 Machine Language

New Release

Maui Vice

Step into the shoes of Crockett & Tubbs, and gather evidence, photographs and witnesses to convict your suspects! With "windows" to select your options, hi-res graphics, and a new story generated each time you play. This is state-of-the-art that guarantees excitement and newness every time you play

64K Ext. Basic & Joystick Required
Disk $21.95

The Misadventures of Eddie

Another great Novasoft adventure. The ol' man in the mines' rebellious son, Eddie, is roaming through time, creating havoc—and you must bring him home in order to return to your own time! Over 140 locations, 50+ commands, in hi-res graphics. Experienced adventurers will love this one!

Requires 64K
Disk $21.95

Goldrunner

Travel the maze in your never-ending search for gold—but beware of trap doors, burly guards and other hazards! 33 screens.

64K Joystick or Keyboard
Tape $14.95 Disk $17.95

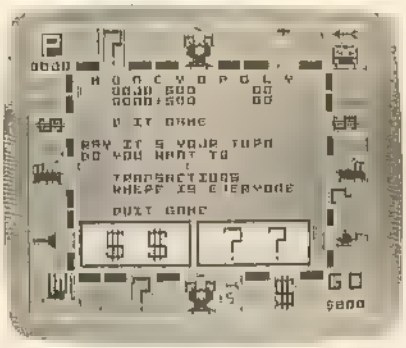

Moneyopoly

Play the popular board game on one of the most realistic computer game simulations ever! Contains all the features of the original. Buy, sell, rent, wheel & deal your way to fortune.

32K Joystick Required
Tape $19.95 Disk $22.95



Vegas Game Pak

Six games in all! Blackjack, Keno, Video Poker & 3 slot machine lookalikes. Super graphics!

16K Ext. Basic Required
Tape $24.95 Disk $27.95

Other Best Sellers

Martian Crypt—Life once existed on Mars! Find the hidden Martian crypt. Animated hi-res graphic adventure with sound effects.

32K Tape $18.95 Disk $21.95

Skyway—Manuever your craft along the skyway avoiding enemy craft, mines, sky bugs and holes! 32K and Joystick.

Tape $19.95 Disk $22.95

Blackbeard's Island—Find Blackbeard's treasure but be ever mindful of the hazards along the way. Graphic adventure.

32K Disk $19.95

Brewmaster—Move along the end of the bars, serving beer to your thirsty customers. Fast-paced action 32K & Joystick.

Tape $14.95 Disk $17.95

CoCo Crosswords—Master set has 27 puzzles, four levels of difficulty. Pull down menu. Additional sets have 30+ puzzles each.

32K Master Set Disk $24.95
Sets #2, #3, #4 just $12.95 ea. on Disk

Color Car—Fast moving racing lets you "bump & jump" other racers through the course.

64K & Joystick. Tape $19.95 Disk $22.95

Tom Mix Products at New Reduced Prices!

Sailor Man—Defeat the bigfatbadguy and win Elsie's heart. Super graphics.

64K Tape $24.95 Disk $27.95

Dragon Slayer—Defeat the dragon by finding your way through a mountain maze. Gather treasure but avoid the deadly traps! 160 exciting screens.

32K & Joystick or Keyboard
Disk $24.95

The King—
32K Tape $24.95 Disk $27.95

Draconian—
32K Tape $19.95 Disk $22.95

Ms. Maze—
32K Tape $19.95 Disk $22.95

Kater Pillar II—
16K Tape $19.95 Disk $22.95

Warehouse Mutants—
16K Tape $18.95 Disk $21.95

Buzzard Bait—
32K Tape $19.95 Disk $22.95

NOVASOFT

A Tom Mix Company
4285 Bradford N.E.
Grand Rapids, MI 49506

Ordering Information

- Add $3 shipping/handling
- MI residents add 4% sales tax
- Dealers welcome
- Many more titles—write for free catalog!

Credit Card Orders

Call 616/957-0444

MasterCard VISA

Part two of the translation demonstration

Uncomplicating Translating

By Joseph Kolar
Rainbow Contributing Editor

Before we dive in and immerse ourselves in the nitty-gritty of the second part of our translation demo, I would like to make a few observations.

We have gone from the germination of an idea and, step by step, added to it to broaden its scope. As a newcomer to CoColand, you have helped construct a program that is well within your capabilities. There was no earth-shattering concept to grasp. But, don't expect to produce a viable program in a day or two. You will find gremlins lurking around and thwarting your efforts every step of the way. No matter. If you attend to the problem at hand and solve it at every stage of the process, you will have a usable, if not useful, program.

Did you notice that as you created this program, you had fun working out each segment? In spite of yourself, you began to associate the Romanian words with their English mates. Not only were you brushing up on your typing and programming skills, but you were becoming familiar with the subject matter.

Florida-based Joseph Kolar is a veteran writer and programmer and specializes in introducing beginners to the powers of CoCo.

This should hint at the potential for educational applications you are beginning to unleash. If you are familiar with a Romance or Germanic language, you may have spotted some cognates. The perceptive programmer might wonder if "raft" meaning "shelf," figuratively a plank, is not related to "raft," a platform for swimming, not to mention a roofing rafter.

Did you save your work on tape? CLOAD it. If not, copy Listing 1 from last month's tutorial. Check out Line 10 to make sure it is GOTO20.

Did you notice that, at times, we had no operating lines 22 and 32? Delete lines 22 and 32, then run. Again, we have three sets of X$ and Y$ strings and only one operating line, Line 42. CoCo always chooses the last X$ or Y$ sentence to operate on. Press BREAK, then restore lines 22 and 32. This observation may be helpful in solving another reoccurring problem.

Key in, from this month's Listing 1, lines 8, 50, 51 and 52. Line 8 prints both sentences without an intervening pause. List lines 50 through 52. Line 51 is a word-by-word literal translation of Line 50. Note, for the first time in our demo, that the sentence in Line 51 extended to the second text line. The invisible-vertical-line gambit is alive and well. Line 52 depicts the usual English translation.

Edit Line 10 at the end to GOTO50. Add at end of Line 5 :GOSUB5 and run. We allow the student/viewer to look over the sentence to be translated. Press BREAK.

Add at end of Line 51 :GOSUB8 and run. We display both the foreign sentence and word-by-word translation merely for informational purposes. Unfortunately, it is a tortured English rendition. Press BREAK.

Add at end of Line 52 :GOSUB3 and run. This displays the two sentences we intend to dissect.

You can devise your own system. This segment is included to give some ideas as to how to approach problems of this nature. You might revise GOSUB3 so both languages are put on simultaneously to display lines 50 and 52. You can also deep-six GOSUBs you do not intend to use.

List lines 50 and 52. We decide to break them into two parts. The most practical break is after "George." Count directly from the screen to get the 'P' and 'Q' values. Key in 53 P=12:Q=9: Do not press ENTER yet. Recall that if the next to last segment of a divided sentence is put on using GOSUB2, you can use GOSUB4 instead. Type GOSUB4

nd press ENTER. Run the program then ress BREAK.

Change Line 10 to 10 CLSZ:GOTO60. ey in lines 60 and 61. Press BREAK and st Line 60. Note that each succeeding ext line begins under the opening quote ark. You may also divide a word if ecessary. The lines look odd because in ine 60 there are no spaces between vords. This is because the words end at he right margin, and the left margin of he next row follows immediately. List ine 61. You can easily spot the invisible ertical line. This is because blank paces were used to fill in the empty pace up to the right margin so that the ext words would start a new row at the eft margin.

Key in 63 GOSJB3. This is a temporary use of GOSUB3 to display lines 60 and 61 in their entirety. It is good practice to double-check long strings for correct spelling and formatting before proceeding. Run the program. The strings X$ and Y$ abut. It doesn't look good. One solution is to drop Y$ two rows or 64 characters/spaces at the beginning of the operating line, Line 62. We want to move 'Y' location down by 64 spaces. Insert Y=Y+64: at the beginning. Run, then press BREAK then CLEAR. List lines 60 and 61.

Our first part will end with the space after '$' and ',' respectively. Count directly from the screen to determine the first set of values, P=24 and Q=27.

Rekey Line 62 to read 62 Y=Y+64: P=24:Q=27:GOSUB2:. Press ENTER. Run and press BREAK, then CLEAR. List lines 60 and 61. Edit Line 62 and enter X.

The next part will end with "urc@" at space 31 and "ascended" at space 38. Add P=31:Q=38:GOSUB2:. Press ENTER. Run and press BREAK, then CLEAR. List lines 60 and 61. Edit Line 62 and enter X.

The next part, "pe tronul" ends at 41 and "the throne" at 52. You can pick up the count either beginning at 32, a known signpost at the start of text row two, or pick up the last 'P' or 'Q' value. You know that "ascended" ended at Q=38. By looking at Line 62, start tapping away with "TO---", T=39, O=40, space=41, etc., to the next division. Enter P=41:Q=52:GOSUB2:. Press ENTER and run it. Press BREAK, then CLEAR. Edit Line 62 and enter X.

The next portion ends at the space after "romaneshti." Pick up the last 'P' value from Line 62 and count off. 'P' will equal 57. The 'Q' value ends after "wallachia."

Look at Line 61. Note that "wallachia" extends across the invisible vertical line. We know that 'C' is at number 64, so pick up the count from that point. It ends at 68. Enter P=57:Q=68: GOSUB2:. Press ENTER and run it. Press BREAK and CLEAR. List lines 60 and 61. Edit line 62 and enter X.

The next part ends in both X$ and Y$ after "1436." You can begin calculating 'P' from number 64 and you can pick up the 'Q' starting number from the last 'Q' value, 68. Determine the values.

Enter P=71:Q=85:GOSUB2:. Press ENTER and run it. Press BREAK and CLEAR. List lines 60 and 61. Edit Line 62 and enter X.

> ***"This mistake may lie dormant while you are creating the program, but after you finalize it, it pops up to haunt you."***

The next 'P' section ends after "incerc@." Pick up the count from the last 'P' value in Line 62 (71) and count. The next 'Q' value is the last word of the text line "and tried." We know the next line begins with number 96, so we subtract one to get to the right margin of the previous line to get 'Q'.

Enter P=82:Q=95:GOSUB2:. Press ENTER and run it. Press BREAK and CLEAR. List lines 60 and 61. Edit Line 62 and press ENTER. This time we won't 'X' to the end. This would cause Line 60 to scroll up and off the screen, losing our place. First, we will determine our next break, which ends after "scape," picking up the count from Line 62. Now, we can type X and P=91:. Do not press ENTER! The English equivalent is "to free." We pick up the count by counting down from the opening quote, 0, 32, 64, 96 and start counting. Add Q=103:GOSUB2:. Press ENTER and run it. Press BREAK and CLEAR. List lines 60 and 61. Edit Line 62 and press ENTER. We have one more break to do. Be on the alert because, after we get our next 'P' and 'Q' values, we add GOSJB4 instead of GOSUB2, then we'll be finished.

The last break is "tsara," which ends

Educational Programs

? Questions ??

Questions — ***a powerful, easy to use, authoring program!*** **Questions** has as many uses as its owners have creativity Teachers have used **Questions** to develop pre and post tests, to make copies of the same test with questions in a different order, and to review and reinforce difficult lessons with their students. But **Questions** is not limited to school uses. Enterprising people have found other uses for it Party-givers have used it to personalize games for baby and wedding showers, and for creating their own trivia games Administrators have used it for inservice training Children have written their own riddles with it. If you own **Questions**, you'll find a way to use it. You will also be pleased with its many fine features:

- ★ Word processing commands that allow you to make changes as you type
- ★ Screen commands so you do not have to constantly refer to the manual
- ★ Options to take the quiz on the computer or to print a hard copy of it
- ★ Sequential or random presentation of questions
- ★ The ability to print the same test with questions in a different order
- ★ The printing of an answer key
- ★ The option to use expanded printer lettering to create large print tests
- ★ The ability to save quizzes to cassette or disk
- ★ A review feature which permits students to study questions that have been missed
- ★ A record keeping system
- ★ Multiple choice, true/false, or fill in the blank formats

Questions is truly a professional authoring program that meets the needs of all of its users.

16K ECB - Cass. $19.95
32K ECB - Cass. $24.95
32K Disk - $26.95

****

Reading Comprehension Series
Grades 2 - 4

B5's **Reading Comprehension Series** is a set of data files to be used with the **Questions** program described above. Each file contains over 100 questions, organized into 6 to 8 sequential lessons. Lessons build from simple to complex. This series emphasizes the thinking aspect of reading Simple sentence structure allows the student to concentrate on thinking skills

Main Idea ★ Sequencing
Fact & Opinion ★ Cause & Effect

Each Title: Cassette - $10.95
Disk $12 95
Complete Series of 4 Titles:
Cass. - $39.95; Disk - $41.95

☞ **Most B5 programs are available through *Radio Shack® Express Order.***

A trademark of Tandy Corp.

B-5 Software Co.
1024 Bainbridge Place
Columbus, Ohio 43228
Phone (614) 276-2752

RAINBOWfest®

Show Schedule
Friday evening
– Exhibits open from 7 p.m. to 10 p.m.
Saturday
CoCo Community Breakfast at 8 a.m.
Exhibits open at 10 a.m. and close at 6 p.m.
Sunday
Exhibits open from 11 a.m. to 4 p.m.

Oct. 17-19

Princeton

RAINBOWfest is the only computer show exclusively dedicated to your Tandy Color Computer. Nowhere else will you see as many products, have access to the top experts, or be able to attend free seminars. It's the next best thing to receiving the latest issue of THE RAINBOW in your mailbox!

Every RAINBOWfest features many delightful surprises. It's a great opportunity for commercial programmers to show off new and innovative products for the first time. You get the jump on new capabilities for your CoCo. In exhibit after exhibit, there are demonstrations, opportunities to experiment with software and hardware, and special RAINBOWfest prices.

You can set your own pace between visiting exhibits and attending the valuable, free seminars on all aspects of your CoCo —

from improving BASIC skills to working with the sophisticated OS-9 operating system.

Many of the people who write for THE RAINBOW — as well as those who are written about — are there to meet you and answer your questions. You'll also meet lots of other people, just like you, who share your interest in the Color Computer. It's a person-to-person event, as well as a tremendous learning experience, in a fun and relaxed atmosphere.

To make it easier for you to participate, we schedule RAINBOWfests in different parts of the country. If you missed the fun in Chicago, Illinois, why don't you make plans now to join us in Princeton? For members of the family who don't share your affinity for CoCo, you'll be comfortable knowing that RAINBOWfest is located in an area with many other attractions.

The Hyatt Regency-Princeton offers special rates ($79, single or double room) for RAINBOWfest. The show opens Friday evening with a session from 7 p.m. to 10 p.m. It's a daytime-only show Saturday — the CoCo Community Breakfast (separate tickets required) is at 8 a.m., then the exhibit hall opens promptly at 10 a.m. and runs until 6 p.m. Sunday, the exhibit hall opens at 11 a.m. and closes at 4 p.m.

Tickets for RAINBOWfest may be obtained directly from THE RAINBOW. We'll also send you a special reservation form so you can get your special room rate.

Come to RAINBOWfest!

RAINBOWfest

Princeton, New Jersey
Dates: Oct. 17-19, 1986
Hotel: Hyatt Regency-Princeton
Rooms: $79 per night, single or double
Advance Ticket Deadline: Oct. 10, 1986

FREE T-Shirt to first five ticket orders received from each state

The POSH way to go.

You may wish to have your travel arrangements handled through RAINBOW affiliate POSH Travel Assistance, Inc. of Louisville. The people at POSH are very familiar with both RAINBOWfest and the area in which it's being held. So, for the same POSH treatment many of our exhibitors enjoy, call POSH at (502) 893-3311. All POSH services are available at no charge to RAINBOWfest attendees.

YES, I'm coming to **Princeton!** I want to save by buying tickets now at the special advance sale price. Breakfast tickets require advance reservations.

Please send me

____ Three-day tickets at $9 each total ____
____ One-day tickets at $7 each total ____
Circle one: Friday Saturday Sunday
____ Saturday CoCo Breakfast at $12 each total
Handling Charge $1 $1.00
TOTAL ENCLOSED ____
(U.S. Currency Only, Please)

☐ Also send me a hotel reservation card for the Hyatt Regency-Princeton ($79, single or double room).

Name (please print) ____
Address ____
City ____ State ____
Telephone ____ ZIP ____
Company ____
☐ Payment Enclosed, or Charge to
☐ VISA ☐ MasterCard ☐ American Express
Account Number ____
Exp Date ____
Signature ____

Make checks payable to The RAINBOW. Mail to: RAINBOWfest, The Falsoft Building, 9509 U.S. Highway 42, P.O. Box 385, Prospect, KY 40059. To make reservations by phone, in Kentucky call (502) 228-4492, or outside Kentucky call (800) 847-0309.

Advance ticket deadline: Oct. 10, 1986. Orders received less than two weeks prior to show opening will be held for you at the door. Tickets will also be available at the door at a slightly higher price. Tickets will be mailed six weeks prior to show. Children 4 and under, free; over 4, full price.

just before our invisible vertical line and therefore must be 95. Type X and P=95:. The last mate is "the country" and we pick up 'Q' from Line 62 and count. Type Q=115:GOSUB4, press ENTER and run. Whew!

It is suggested that you advance from division to division until you feel comfortable with this system. Once you get it under your belt, you can figure out the operating line completely before you check it out.

Did you notice the need to use CLEAR when working on a long text line?

Let's consider the case of differing word order between languages.

Type 10 CLSZ:GOTO80. Key in lines 7, 70 and 71. List lines 70 and 71. "Om" means "man" and "crud" means "cruel." If we choose to break after "om," we find the word "man" is further in the sentence and we have a new problem: to pluck out "man" without "the cruel." We must use a new stratagem to produce parallel definitions.

We could chicken out and make the break end after "crud" and "man" respectively, but we won't.

Look at Line 7. This GOSUB allows us to display X$ as usual. We use MID$ to pull out the word we want and display it first. MID$(Y$,Q,R) tells us that from a specified point, 'Q', in the body, MID$, of sentence Y$, we want to display 'R' characters/spaces.

First, recall that we pushed down Line 61 64 spaces to Y+64. Since we are returning to a normal line, we must return 'Y' to its usual value. We must begin Line 72 with either Y=Y-64 or Y=225. Otherwise, as we add numerous program segments, some of which will be overly long text lines, Y$ will be displayed lower and lower and eventually drift completely off the screen, due to a cumulative error.

This mistake may lie dormant while you are creating the program, but after you finalize it, it pops up to haunt you.

Back to work! We determine the value of 'P', 5. Type 72 Y=225:P=5:. Do not press ENTER yet. Note the following procedure carefully: The word we want to appear first is "man" with its leading and following blank spaces (for aesthetic reasons). Since it is in the body of the sentence we must determine the values of MID$(Y$,Q,R).

We count on the screen from the invisible vertical line, the number of spaces up to and including the last letter of the word in front of the word we are targeting. It is the 'L' in "cruel," 11 spaces. This is our offset 'Y' value, Y=Y+11. Add Y=Y+11:. 'Q' is always one number higher than the offset 11. Add Q=12:. To figure out 'R', count, starting at 'Q', the number of spaces to be displayed (six). Add R=6:. To activate MID$(Y$,12,6), we tack on GOSUB7: and press ENTER. Run it, press BREAK and list lines 70 and 71. Edit Line 72 and enter X.

We must return to the beginning of Y$ to display "the cruel." We reduce 'Y' by the amount of the offset, 11. Add Y=Y-11:. We are ready to work up the next word(s). The break in X$ is the space after "crud," whose 'P' value is 11. There are a variety of ways to pick up 'Q'. To be safe, count from the starting quote up to and including the space after "cruel" (even though this last space is already displayed), Q=12. Type P=11:Q=12:GOSUB2:. Press ENTER and run.

The next division is after "ishi" and "himself." Press BREAK and list lines 70 and 71. Edit Line 72 and enter X. Type P=15:Q=26:GOSUB2: and press ENTER. Run it and press BREAK. List lines 70 and 71. Edit Line 72 and enter X.

Next, we will break after "ucise" and

Listing 1: LANGTJT1

```
Ø 'LISTING1
1 X=97:Y=225:Z=RND(7)+1:IF Z=6 G
OTO1 ELSE GOTO1Ø
2 PRINT@X,LEFT$(X$,P);:EXEC44539
:PRINT@Y,LEFT$(Y$,Q);:EXEC44539:
RETURN
3 P=159:Q=159:PRINT@X,LEFT$(X$,P
);:EXEC44539:PRINT@Y,LEFT$(Y$,Q)
;:Z=RND(7)+1:EXEC44539:CLSZ:RETU
RN
4 GOSUB2:GOSUB3:RETURN
5 P=159:PRINT@X,LEFT$(X$,P);:EXE
C44539:CLSZ:RETURN
7 PRINT@X,LEFT$(X$,P);:EXEC44539
:PRINT@Y,MID$(Y$,Q,R);:EXEC44539
:RETURN
8 P=159:Q=P:PRINT@X,LEFT$(X$,P);
:PRINT@Y,LEFT$(Y$,Q);:EXEC44539:
CLSZ:RETURN
1Ø CLSZ:GOTO2Ø
2Ø X$="  CEI CARE ASCULT@ 'NVA^@
. "
21 Y$="  THOSE WHO LISTEN LEARN.
 "
22 GOSUB3
3Ø X$="  PUN O CARTE PE UN RAFT.
 "
```


Personal Stationery for Personal Computers

Now, a unique quality stationery for the personal computer user.

Perfect for letters, thank you notes and correspondence of all types.

Give your computer correspondence the personal touch.

- Designed, continuous feed, Classic® Laid and Linen stationery.
- Dozens of pre-printed designs available.
- The perfect gift for all personal computer users, family, friends, business associates and children.

Write Today for Free Sample and Brochure

hi-tech Stationery
5901 Warner Ave. Suite 270-B
Huntington Beach, CA 92649



h i - t e c h
Stationery

Quality Stationery for Personal Computers

Computerware's Products of the Month

C.E.O.
The Complete Electronic Organizer
by Warren Jinchuk

$10.00 off

With the **C.E.O.** desktop software your CoCo becomes your own personal administrative assistant. Screens show in an easy to read hires display with upper and lower case. The icons (pictures for commands) make it simple and fun to use.

Using the **Date Book** you can keep track of special occasions, memos, and hourly notes that can be printed or displayed as a daily schedule or for a whole week. The **Calculator** allows you to do quick computations. Let the accurate real-time **Clock** help keep you on time. It beeps every hour, and also has a convenient alarm that you can set to remind you of those important appointments. The **Phone Directory** can keep up to 194 entries of names and phone numbers. Instead of jotting down notes on small pieces of paper than can get lost, use the **Freeform File Drawer** to write messages. Your notes will be neatly organized and saved for instant retrieval.

You can display or print any of your entries upon request. **C.E.O.'s** mini-formatter prints everything in an easy-to-read style. **$49.95**

Requires 64K, at least one disk drive. Supports dual drives when available.

$5.00 off

Pro Golf
by John Sandberg

Tee off with this great simulation of America's most played sport. **Pro Golf** offers practice sessions on the Putting Green and the Driving Range before you go to play either the front or back nine. You'll face real situations like wind factors in the rough or out-of-bounds, trees, water traps, and more! **Pro Golf** provides an entertaining challenge to the beginner as well as the pro, with 36 holes to practice on. **$29.95**

Requires 32K, Disk, Extended Basic

Monitors



NAP Monochrome Monitors

The 20 mhz band width, 800 line resolution and 80 x 25 display insure a crisp picture. The non-glare screen and streamlined styling is also attractive. Plus it has audio input.

Green 12" Amber 12" **$105.00**

plus $5 shipping

SAKATA Color Monitor

Beautiful 13" color display with 280 x 300 line resolution. Includes composite video, color and audio.

$175 plus $15 shipping

Universal Video Plus
composite video interface for all Color Computers!

We would like you to look at our **Universal Video Plus** and would dare you to compare it with any other video interface. We feel confident that you will see that it is the **best product** and the **best buy** in CoCo monitor drivers ever!

- The Universal Video Plus works with **every CoCo**. Easy-to-follow **clear instructions** are included.
- **All cables** (audio & video) are included. No need to buy extenders or extra cables as required by other drivers.
- **Heavy duty construction**, evidenced by sturdy leads and connectors.
- **Shielded audio & video cables** insure that no extra RF interference is introduced from the Universal Video Plus, unlike other interfaces.
- The **adjustment** pot on the Universal Video Plus makes it **easy to optimize** the video signal for each computer. You don't have to modify your computer to get good display!
- Our advanced design gives the **highest quality display.**
- **Installation is easy.** There's no soldering and no dismantling of the RF shield.

Universal Video Plus **$34.95**

$5.00 off

Treasure of the Aztecs
by Scott Cabit

You take a small force to search the jungles in hopes of finding the missing **Treasure of the Aztecs**. While following a faint trail, your team is ambushed by Aztec warriors. You awaken after the battle alone and disoriented. Can you, a lone soldier, survive the perils of the jungle... and rediscover the **Treasure of the Aztecs**?

This unique graphics adventure features special sound effects and four voice music. There are over 50 hires graphic screens and it allows use of the Radio Shack SSC Speech Cartridge.

Requires 64K

Cassette $24.95 **Disk $27.95**

$5.00 off

Escape : 2012
by B. Chambless

In the great tradition of outer space adventure we present **Escape: 2012**. While on a mission for the United Earth Forces, you've been captured behind enemy lines. As a prisoner of war, you must escape. In this graphics adventure there are over 35 objects to deal with, 137 rooms arranged in a 3 dimensional maze of 4 levels to traverse and at least 2 arcade sequences to master before you can proceed. The graphics and action are superb! **Cassette $24.95**

Requires 64K **Disk $27.95**

Computerware is a federally registered trademark of Computerware.

Canadian distribution by Kelly Software
Box 1932 Edmonton Alberta T5J 3L1

Free Catalog!!

- pages of hardware
- over 50 software products
- informative articles & product reviews
- monitors, disk drives, modems, printers, joysticks, & more
- business applications, OS-9 software, personal productivity tools, games, & more

send for our free catalog & get $3 off with this coupon.

$3 **$3 OFF** any order of $20 or more from Computerware $3

expires 9-30-86

Call or Write to:

COMPUTERWARE® (619) 436-3512
Box 668 • Encinitas, CA • 92024

Name _____
Address _____
City _____ State ____ Zip ____
Yes! Send me your FREE catalog! **CoCo** ☐
VISA MasterCard
Card # _____ Exp ____
Signature _____

Item	Format	Price

Shipping
Surface — $2 minimum
2% for orders over $100
Air or Canada $5 minimum
5% for orders over $100
Checks are delayed for bank clearance

6% Calif. Sales Tax _____
COD Add $5 _____
Shipping* _____
TOTAL _____

"killed." Type P=21:Q=34:GOSUB2:. Note that we pick up 'Q' at number 32, the invisible vertical line. We won't run this one.

We decide to put on "dushmanii" and "the enemy" next. The phrase, "f@r@ mil@" and "without pity" will be put on as a unit. That being our plan, we are alert to the fact that we are calculating the next to last 'P' and 'Q' values. We know that "dushmanii" is the last word on the row, so we use the right margin number, 31, or P=31. We pick up our count from the last 'Q' value in Line 72 and count it out, 44. Type P=31:Q=44:GOSUB4. Press ENTER and run.

Checking out our handiwork, I see that we could have placed parentheses around "himself" because we don't usually use the reflexive pronoun in this context. You may want to alter Line 71 to do so. Be warned, some of your 'Q' values will have to be revised. In fact, you should be eager to work it out. Refer to Listing 2, lines 71 and 72 to see if you got the same answer. It is not necessary to copy this listing.

That was the good news. Now, here is the bad news. Lines 70 through 72 present another problem that I neatly side-stepped.

From Listing 2, list lines 70 and 71. Key in the lines as lines 80 and 81. Now list 80 and 81. Aside from the fact that the word order is different, the equivalent of "om" is "the man," not "man." This is a split-section. This creates a new problem that occurs frequently in German verbs. Note the sentence "Ich mache das fenster zu" where "zumachen," meaning "to shut," is split — "mache---zu."

The definite article is separated from the noun in Line 81. Rather than work out both the inverted word order and the split-section at the same time, we solved one problem, and now we'll try both

Key in Line 9. This GOSUB displays X$ up to the break; Y$, to the first break at 'Q'; then it skips to a second location (Y+A+1) and pulls the balance out of the body of the sentence.

GOSUB9 handles the split-section in the second language. If you need it for the first language, your project is to modify this line. If you can't dream up a demo sentence to check it out, then make the contents of Line 80 Y$ and X$ in Line 81.

The 'P' value of "om" is five. The 'Q' value of "the" is six. Count to the last letter of the last word in front of the target "man," 11, which is 'A'. 'B' is always the next space. B=12 and 'R' is the number of spaces to be displayed, six.

Type B2 P=5:Q=6:A=11:B=12:R=6:GOSUB9, press ENTER. Run it and press BREAK.

Figure out the next break, "crud"-"cruel," P=11 and Q=12. Edit Line 82, press X and ENTER, then type P=11:Q=12:. Since we already displayed the various parts in the last segment (lines 70 through 72) let's cut the agony and finish. Type GOSUB4 and run it.

As usual, there is an easier version of GOSUB9, but it is not consistent with our rigid demo format. Lines 100 through 142 contain a few more sentences. They are a bonus for the dedicated programmer to study or work through for practice.

You can delete lines 20 through 142 and use this program as a core to translate sentences in some other language. This program is great for self-study. Crack open a conversational grammar and sharpen your programming skills while painlessly absorbing a foreign vocabulary. □

```
31 Y$="  I PUT A BOOK ON A SHELF
. "
32 GOSUB3
4Ø X$="  NE VOM DUCE M'INE DIMIN
EA^@. "
41 Y$="  WE SHALL GO TOMORROW MO
RNING."
42 P=5:Q=P:GOSUB2:P=9:Q=11:GOSUB
2:P=14:Q=P:GOSUB2:P=2Ø:Q=23:GOSU
B4
5Ø X$="  PE GEORGE 'L DOARE CAPU
L. ":GOSUB5
51 Y$="  AS FOR GEORGE, HE HURTS
 THE  HEAD. ":GOSUB8
52 Y$="  GEORGE (HE) HAS A HEADA
CHE. ":GOSUB3
53 P=12:Q=9:GOSUB4
6Ø X$="  DOMNITORUL VLAD ^EPE$ S
E URC@PE TRONUL ^ARII ROM'NE$TI
'N AN-UL 1436 $I 'NCERC@ S@ SCAP
E ^ARADE TURCI. "
61 Y$="  THE RULER, VLAD TSEPESH
, AS- CENDED TO THE THRONE OF WA
LLA-  CHIA IN THE YEAR 1436 AND
TRIED TO FREE THE COUNTRY FROM T
HE    TURKS. "
62 Y=Y+64:P=24:Q=27:GOSUB2:P=31:
Q=38:GOSUB2:P=41:Q=52:GOSUB2:P=5
7:Q=68:GOSUB2:P=71:Q=85:GOSUB2:P
=82:Q=95:GOSUB2:P=91:Q=1Ø3:GOSUB
2:P=95:Q=115:GOSUB4
7Ø X$="  OM CRUD, '$I UCISE DU$M
ANII  F@R@ MIL@. "
71 Y$="  THE CRUEL MAN, HIMSELF,
 KILL-ED THE ENEMY WITHOUT PITY.
 "
72 Y=225:P=5:Y=Y+11:Q=12:R=6:GOS
UB7:Y=Y-11:P=11:Q=12:GOSUB2:P=15
:Q=26:GOSUB2:P=21:Q=34:GOSUB2:P=
31:Q=44:GOSUB4
99Ø 'GOTO99Ø
999 CLSZ:PRINT@1Ø," REPEATING..
";:FOR S=1 TO 1ØØØ:NEXT:GOTO2Ø
```

Listing 2: LANGTUT2

```
Ø 'LISTING2
1 X=97:Y=225:Z=RND(7)+1:IF Z=6 G
OTO1 ELSE GOTO1Ø
2 PRINT@X,LEFT$(X$,P);:EXEC44539
:PRINT@Y,LEFT$(Y$,Q);:EXEC44539:
RETURN
3 P=159:Q=159:PRINT@X,LEFT$(X$,P
);:EXEC44539:PRINT@Y,LEFT$(Y$,Q)
;:Z=RND(7)+1:EXEC44539:CLSZ:RETU
RN
4 GOSUB2:GOSUB3:RETURN
5 P=159:PRINT@X,LEFT$(X$,P);:EXE
C44539:CLSZ:RETURN
7 PRINT@X,LEFT$(X$,P);:EXEC44539
```

```
:PRINT@Y,MID$(Y$,Q,R);:EXEC44539
:RETURN
8 P=159:Q=P:PRINT@X,LEFT$(X$,P);
:PRINT@Y,LEFT$(Y$,Q);:EXEC44539:
CLSZ:RETURN
9 PRINT@X,LEFT$(X$,P);:EXEC44539
:PRINT@Y,LEFT$(Y$,Q);:PRINT@Y+A,
MID$(Y$,B,R);:EXEC44539:RETURN
1Ø CLSZ:GOTO2Ø
2Ø X$="  CEI CARE ASCULT@ 'NVA^@
. "
21 Y$="  THOSE WHO LISTEN LEARN.
 "
22 GOSUB3
3Ø X$="  PUN O CARTE PE UN RAFT.
 "
31 Y$="  I PUT A BOOK ON A SHELF
. "
32 GOSUB3
4Ø X$="  NE VOM DUCE M'INE DIMIN
EA^@. "
41 Y$="  WE SHALL GO TOMORROW MO
RNING."
42 P=5:Q=P:GOSUB2:P=9:Q=11:GOSUB
2:P=14:Q=P:GOSUB2:P=2Ø:Q=23:GOSU
B4
5Ø X$="  PE GEORGE 'L DOARE CAPU
L. ":GOSUB5
51 Y$="  AS FOR GEORGE, HE HURTS
 THE  HEAD. ":GOSUB8
52 Y$="  GEORGE (HE) HAS A HEADA
CHE. ":GOSUB3
53 P=12:Q=9:GOSUB4
6Ø X$="  DOMNITORUL VLAD ^EPE$ S
E URC@PE TRONUL ^ARII ROM'NE$TI
'N AN-UL 1436 $I 'NCERC@ S@ SCAP
E ^ARADE TURCI. "
61 Y$="  THE RULER, VLAD TSEPESH
, AS- CENDED TO THE THRONE OF WA
LLA-  CHIA IN THE YEAR 1436 AND
TRIED TO FREE THE COUNTRY FROM T
HE    TURKS. "
62 Y=Y+64:P=24:Q=27:GOSUB2:P=31:
Q=38:GOSUB2:P=41:Q=52:GOSUB2:P=5
7:Q=68:GOSUB2:P=71:Q=85:GOSUB2:P
=82:Q=95:GOSUB2:P=91:Q=1Ø3:GOSUB
2:P=95:Q=115:GOSUB4
7Ø X$="  OM CRUD, '$I UCISE DU$M
ANII  F@R@ MIL@. "
71 Y$="  THE CRUEL MAN, (HIMSELF
),    KILLED THE ENEMY WITHOUT P
ITY. "
72 Y=225:P=5:Y=Y+11:Q=12:R=6:GOS
UB7:Y=Y-11:P=11:Q=12:GOSUB2:P=15
:Q=28:GOSUB2:P=21:Q=38:GOSUB2:P=
31:Q=48:GOSUB4
8Ø X$="  OM CRUD, '$I UCISE DU$M
ANII  F@R@ MIL@. "
```


Authorized Star Micronics Service Center * Call for return authorization number.

COSMOS © COMPUTER SERVICES, INC
P.O. Box 156 620 Stuart St., Green Bay, WI 54301 (414) 432-4635

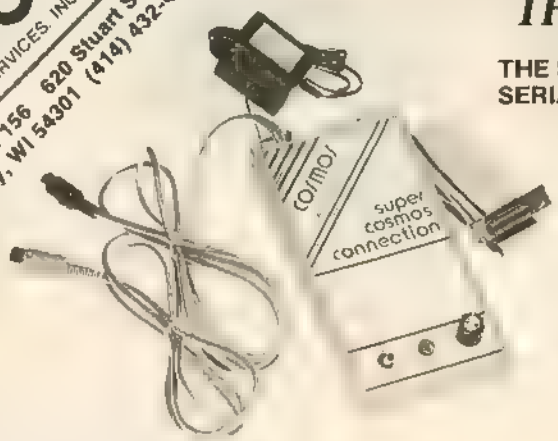

THE WAITING IS OVER!

THE SUPER COSMOS CONNECTION
SERIAL TO PARALLEL CONVERTER *WITH* BUFFER!

YOU JUST CAN'T BUY A BETTER SERIAL/PARALLEL CONVERTER! ORDER YOURS TODAY

- 8K SUPER COSMOS CONNECTION

— *ONLY $129.95* —

8K RAM CHIP SOLD SEPARATELY - $15.95 each
3 FOR $42.95
16K VERSION - $144.95
24K VERSION - $154.95
32K VERSION - $169.95

- SERIAL TO PARALLEL CONVERSION
- 110 TO 19,200 BAUD, 7 OR 8 BIT
- 8K BYTES STANDARD BUFFER (USER EXPANDABLE TO 32K IN 8K STEPS)
- COPY/CLEAR, LED PUSH BUTTON (MULTIPLE COPIES)
- MODEM SWITCH AND *ALL* CABLES
- COMPLETE WITH POWER PAK AND SIMPLE INSTRUCTIONS
- WORKS WITH *ANY* PARALLEL PRINTER OR YOUR MONEY BACK
- HIGHEST QUALITY CONSTRUCTION, *TWO-YEAR* WARRANTY

TEST RESULTS: *(19,056 BYTE PROGRAM LISTING AT 9600 BAUD.)*

32K SUPER COS-CON	**OTHER INTERFACE**
36 8 Seconds	4 min. 59.8 sec.

IF YOU'D RATHER BE USING YOUR COMPUTER THAN WAITING FOR YOUR PRINTER . . . . . *THE WAIT IS OVER.*

8K SUPER COSMOS CONNECTION AND STAR SG-10 PRINTER
$379.00 Package S&H Included!

VISA MasterCard AMERICAN EXPRESS

NO SURCHARGE FOR CREDIT CARDS

Reviewed in Dec. 1985 Rainbow

Sh pping Included!

Dealer Inquiries on Company Letterhead Invited

```
81 Y$="  THE CRUEL MAN, (HIMSELF
),    KILLED THE ENEMY WITHOUT P
ITY. "
82 P=5:Q=6:A=11:B=12:R=6:GOSUB9:
P=11:Q=12:GOSUB4
1ØØ PRINT@5, "THE REST OF THE ST
ORY ";
1Ø1 X$="  PE MUL^I 'I ^RASE 'N ^
EAP@. "
1Ø2 Y$="  MOST OF THEM, (THEM) H
E IM-  PALED. "
1Ø3 P=11:Q=16:GOSUB2:P=14:Q=23:G
OSUB4
11Ø X$="  DE ACEEA FU PORECLIT V
LAD    ^EPE$ SAU VLAD DRACUL. "
111 Y$="  BECAUSE OF THIS HE WAS
 NICK- NAMED VLAD THE IMPALER OR
 VLAD  THE DEVIL. "
112 P=11:Q=18:GOSUB2:P=14:Q=25:G
OSUB2:P=23:Q=37:GOSUB2:P=37:Q=54
:GOSUB4
12Ø X$="  MAI T'RZIU, 'N SECOLUL
 XIX,  UN SCRIITOR BRITANIC BRAM
 STOKERSCRISE ROMANUL DRACULA CA
RE SE  PETRECEA 'N TRANSILVANIA.
 "
121 Y$="  MUCH LATER, IN THE 19T
H CEN- TURY, A BRITISH WRITER, B
RAM    STOKER, WROTE THE NOVEL,
'DRA-  CULA', WHICH TOOK PLACE I
N TRAN-SYLVANIA. "
122 Y=Y+64:P=14:Q=P:GOSUB2:P=31:
Q=37:GOSUB2:P=43:Q=39:A=46:B=47:
R=9:GOSUB9:P=52:Q=47:GOSUB2:P=63
:Q=71:GOSUB2:P=7Ø:Q=77:GOSUB2:P=
86:Q=1Ø2:GOSUB2:P=91:Q=1Ø8:GOSUB
2:P=1Ø4:Q=119:GOSUB4
13Ø X$="  ÀCEST SCRIITOR C@L@TOR
I 'N   TRANSILVANIA $I AUZI DE V
LAD    DRACUL. "
131 Y$="  THIS WRITER TRAVELED I
N TRAN-SYLVANIA AND HEARD ABOUT
VLAD   THE DEVIL. "
132 Y=225:P=17:Q=14:GOSUB2:P=26:
Q=23:GOSUB2:P=44:Q=4Ø:GOSUB2:P=5
5:Q=56:GOSUB4
14Ø X$="  DUP@ AL C@RUI NUME ALE
SE     TITLUL ROMANULUI S@U. "
141 Y$="  ACCORDING TO WHOSE NAM
E HE   CHOSE AS THE TITLE OF HIS
 NOVEL."
142 P=7:Q=15:GOSUB2:P=16:Q=21:GO
SUB2:P=21:Q=26:GOSUB2:P=31:Q=37:
GOSUB2:P=38:Q=5Ø:GOSUB2:P=48:Q=5
3:A=56:B=57:R=7:GOSUB9:GOSUB3
99Ø 'GOTO99Ø
999 CLSZ:PRINT@1Ø," REPEATING..
";:FOR S=1 TO 1ØØØ:NEXT:GOTO2Ø
```

About Your Subscription

Your copy of THE RAINBOW is sent second class mail. If you do not receive your copy by the 5th of the month of the publication date, send us a card and we will mail another. Canadian subscribers and foreign airmail allow two additional weeks.

You must notify us of a new address when you move. Notification should reach us no later than the 15th of the month prior to the month in which you change your address. Sorry, we cannot be responsible for sending another copy when you fail to notify us.

Your mailing label also shows an "account number" and the subscription expiration date. Please indicate this account number when renewing or corresponding with us. It will help us help you better and faster.

For Canadian and other non-U.S. subscribers, there may be a mailing address shown that is different from our editorial office address. Do not send any correspondence to that mailing address. Send it to our editorial offices at Falsoft, Inc., The Falsoft Building, P.O. Box 385, Prospect, KY 40059. This applies to everyone *except* those whose subscriptions are through our distributor in Australia.

About The One-Liner Contest

THE RAINBOW's One-Liner Contest has now been expanded to include programs of either one or two lines. This means a new dimension and new opportunity for those who have "really neat" programs that simply just won't fit in one line.

Here are the guidelines: The program must work in Extended BASIC, have only one or two line numbers and be entirely self-contained — no loading other programs, no calling ROM routines, no poked-in machine language code. The program has to run when typed in directly (since that's how our readers will use it). Make sure your line, or lines, aren't packed so tightly that the program won't list completely. Finally, any instructions needed should be *very* short.

Send your entry (preferably on cassette) to.

THE RAINBOW One-Liner Contest
P.O. Box 385
Prospect, KY 40059

Radio Shack has the best

...of everything.

Accessories can make the difference between just a computer and an *efficient* computer system. That's why Radio Shack offers a wide selection of accessories that make the most of your Color Computer.

Save valuable time with the Multi-Pak Interface (A, $99.95). It connects up to four Program Pak™ cartridges so you can change programs quickly and easily. You can change between slots with the built-in selector switch, or under program control.

If you like being a winner, then this is the fast-action joystick for you! With 360° movement and single-shot control, these joysticks give you the advantage every time (B, Pair-$19.95).

With our FD-501 Thinline Disk Kit (C, $299.95) you can turn your Color Computer with Extended BASIC into a full-fledged disk system. Because the Kit comes complete and ready to run—all you have to do is plug it in and you'll have 156,672 characters of user storage per 5¼" diskette.

Need the ultimate in storage capabilities? Then the Hard Disk Interface (not shown, $129.95) can give you just that.

Want quick and accurate control? Let our Color Mouse (D, $49.95) scurry across your tabletop to accurately position the computer's cursor movement.

Radio Shack has the right accessories for your Color Computer!

Radio Shack®
The Technology Store™
A DIVISION OF TANDY CORPORATION

Send me an RSC-17 Computer Catalog.

Radio Shack, Dept. 87-A-22
300 One Tandy Center
Fort Worth, TX 76102

Name _____
Address _____
City _____
State _____ ZIP _____
Phone _____

Prices apply at Radio Shack Computer Centers and participating Radio Shack stores and dealers. Components pictured with accessories not included.

Is your skill and courage enough to save the Earth from . . .

Can be modified for 16K ECB

The Evil Tyrant Star Lord

By Raju Dash

You are the last hope for your people. Ever since those dreaded aliens arrived, they have caused nothing but destruction. You are in command of the last surface laser cannon. You must use this powerful weapon to destroy the merciless attackers. If you fail, the tyrant Star Lord will enslave your people. It's up to you!

You must position the laser turret and try to hit the attacking alien ship. If the alien ship hits you with one of its bullets, you lose one shield. At the beginning of *Starlord* you have three shields. An indicator in the top right-hand corner of the screen displays the last three shields you have. (It is possible to have more than three shields, but only the last three are indicated.)

The flat land on which your turret moves (the yellow strip of land) protects you from incoming bullets. However, alien ships slowly destroy the earth below as they descend toward the bottom of the screen. If you collide with one of the aliens, you lose a shield. In order to advance to the next skill level, you must destroy one full squadron (16 ships). You are rewarded with a shield.

The screen clears and a new, flickering type of ship starts descending toward the ground. It is important that it be shot before it reaches the ground. If it lands, you will not advance to the next skill level; rather you will have to fight another squadron from the same skill level. The number of ships and the speed of the game increases as the skill level increases.

When you lose all of your shields, the program displays the title screen. At the top of the screen, the high score is displayed, and at the bottom right, the most recent score is shown. At the bottom left is the current skill level. Unless the Reset button is pressed, you continue playing from the skill level on which you died. This way you do not have to repeat the screens you completed before. While the program runs, you may pause execution by pressing the BREAK key. To restart press ENTER.

The program allows either joystick or keyboard input. Simply press 'J' or 'K' from the title screen to make a selection. If you choose the joystick option, use the right joystick to move and the button to fire. For the keyboard option, use the left- and right-arrow keys to move and the space bar to fire.

Raju Dash is a senior at Downers Grove North High School in Illinois. He started programming in BASIC on a 4K Color Computer five years ago and has progressed to programming in assembly language on a 64K CoCo 2.

Radio Shack's Color Computer 2®

SAVE ON OUR BEST!

64K Memory! Extended BASIC! Cut $40...new low price $159.95

The Color Computer 2 is an affordable computer that allows you to write programs tailored to your personal and household needs. It's ideal for small-business and professional uses alike. With the built-in Extended BASIC language, you can access 32,000 characters of memory. To access the full 64K memory, simply add a disk drive and the optional OS-9 disk operating system.

The powerful Color Computer 2 (26-3127, was 199.95 in Cat. RSC-16) creates detailed color graphics from simple, one-line commands, and is ideal for drawings, designs, charts, engineering diagrams and even animation!

Ready-to-run software can help you set up personal and household budgets, create a household inventory, keep track of your investments, write letters and reports and record recipes.

With a wide range of educational software available, your children can use the Color Computer 2 to help strengthen their math, spelling and reading skills. The family can even play exciting computer games. The system attaches to any TV and is easily expanded.

Get the Color Computer 2 and your family will immediately start to enjoy the advantages of home computing . . . together!

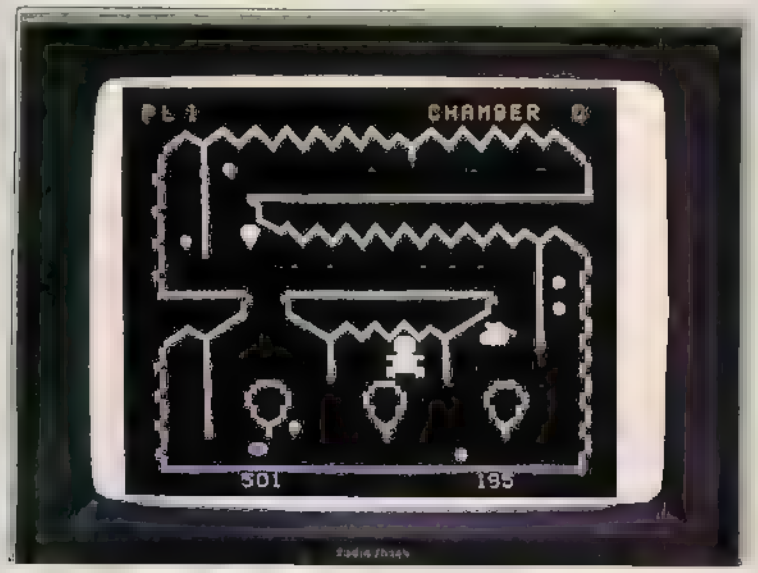

Radio Shack®
The Technology Store™
A DIVISION OF TANDY CORPORATION

Send me a new RSC-17 Computer Catalog

Mail To: Radio Shack Dept. 87-A-22A
300 One Tandy Center Fort Worth Texas 76102

Name _____
Company _____
Address _____
City _____
State _____ Z.P. _____
Telephone _____

TV not included. Price applies at Radio Shack Computer Centers and at participating Radio Shack stores and dealers. OS-9/TM Microware and Motorola

After typing in the BASIC loader for *Starlord*, save it to disk or tape. Then perform a cold start on your computer. Type in POKE 25,57:POKE 14592,0:NEW to reserve room for the assembled program. Now CLOAD the BASIC loader back into the computer. If you want to save the program as a binary file, delete Line 50. Run the program. In approximately 30 seconds the program will execute. If you deleted Line 50, the computer simply prints OK when it is finished poking the data into memory. Now you can save it. Type CSAVEM"STARLORD",10240,14430,12124 to save the program as a binary file.

Now all you have to do is CLOADM and EXECute to run the program. The program runs on any Color Computer with 32K memory. Since the assembled version will run on a 16K system, the easiest way to load the program would be to make a binary file of it on a 32K system and then load the machine language code on the 16K system. (The BASIC loader takes up a little over 16K.) Another, more tedious method, would be to break the loader up into several short BASIC loaders, each loading a part of the total program. Then, once the entire program has been poked into memory, it can be saved as a binary file. This process is tricky, so be cautious.

Starlord is a very exciting game particulary at the higher skill levels. Here's a tip: A bullet takes longer to hit a ship that is higher up so you must fire in advance of the ship in order to hit it. Hitting ships becomes easier at the higher skill levels because the entire game executes faster. I will be happy to answer any questions that may arise. Have fun!

(Questions about this program may be directed to Mr. Dash at 1490 Golden Bell Ct., Downers Grove, IL 60515, 312-960-0428. Please enclose an SASE when writing.) □

180 34	1650 76	2830 162	4340 44
370 153	1760 198	2980 5	4490 169
560 161	1850 161	3130 213	4700 1
740 55	1950 0	3280 63	4870 122
870 134	2060 236	3430 126	5020 254
1080 67	2160 126	3590 216	5170 165
1210 33	2260 144	3740 48	END 149
1330 167	2360 152	3890 154	
1430 197	2530 119	4040 115	
1530 234	2680 222	4190 17	

```
5 '**basic loader for StarLord
7 'be sure to POKE 25,57 before
loading!!
1Ø FOR I= 1Ø24Ø TO  1443Ø
2Ø READ X
3Ø POKE I,X
4Ø NEXT I
5Ø EXEC 12174
6Ø DATA 32,33,35,37,39,41,43,45
7Ø DATA 46,48,5Ø,51,53,54,55,57
8Ø DATA 58,59,6Ø,6Ø,61,62,62,63
9Ø DATA 63,63,63,63,63,63,62,62
1ØØ DATA 61,6Ø,6Ø,59,58,57,56,55
11Ø DATA 54,53,51,5Ø,49,48,46,45
12Ø DATA 44,43,41,4Ø,39,38,37,35
13Ø DATA 34,33,32,32,31,3Ø,29,29
14Ø DATA 28,28,28,27,27,27,27,27
15Ø DATA 27,27,28,28,28,29,29,3Ø
16Ø DATA 3Ø,31,32,32,33,34,35,36
17Ø DATA 36,37,38,39,39,4Ø,41,42
18Ø DATA 42,43,43,44,44,45,45,45
19Ø DATA 45,45,45,45,45,45,45,45
2ØØ DATA 44,44,43,43,42,41,41,4Ø
21Ø DATA 39,38,37,36,35,35,34,33
22Ø DATA 32,3Ø,29,28,28,27,26,25
23Ø DATA 24,23,22,22,21,2Ø,2Ø,19
24Ø DATA 19,18,18,18,18,18,18,18
25Ø DATA 18,18,18,18,19,19,2Ø,2Ø
26Ø DATA 21,21,22,23,24,24,25,26
27Ø DATA 27,27,28,29,3Ø,31,31,32
28Ø DATA 33,33,34,34,35,35,35,36
29Ø DATA 36,36,36,36,36,36,35,35
3ØØ DATA 35,34,34,33,32,31,31,3Ø
31Ø DATA 29,28,26,25,24,23,22,2Ø
32Ø DATA 19,18,17,15,14,13,12,1Ø
33Ø DATA 9,8,7,6,5,4,3,3
34Ø DATA 2,1,1,Ø,Ø,Ø,Ø,Ø
35Ø DATA Ø,Ø,1,1,2,3,3,4
36Ø DATA 5,6,8,9,1Ø,12,13,15
```

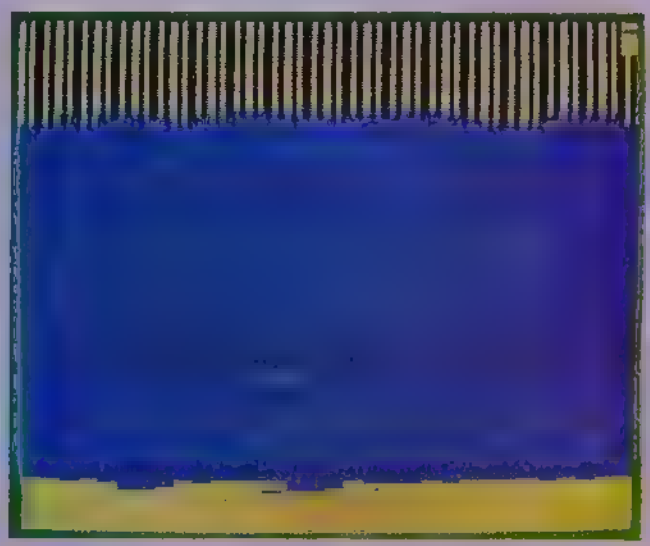

```
37Ø DATA 17,18,2Ø,22,24,26,28,3Ø
38Ø DATA 32,34,37,39,42,44,46,48
39Ø DATA 5Ø,52,54,56,57,59,6Ø,61
4ØØ DATA 62,62,63,63,63,63,63,62
41Ø DATA 62,61,6Ø,59,58,57,56,55
42Ø DATA 54,52,51,5Ø,48,47,46,44
43Ø DATA 43,42,41,4Ø,39,38,38,37
44Ø DATA 36,36,36,35,35,35,35,35
45Ø DATA 35,35,35,35,35,35,35,36
46Ø DATA 36,36,36,36,36,37,37,37
47Ø DATA 37,37,37,37,37,37,36,36
48Ø DATA 36,36,36,36,36,35,35,35
49Ø DATA 35,35,35,34,34,34,34,34
5ØØ DATA 34,34,34,34,34,34,34,34
51Ø DATA 34,34,34,34,34,34,34,34
52Ø DATA 34,34,34,34,34,34,34,34
53Ø DATA 33,33,33,33,33,32,32,32
54Ø DATA 32,31,31,31,3Ø,3Ø,3Ø,3Ø
55Ø DATA 3Ø,29,29,29,29,29,29,29
56Ø DATA 29,29,29,29,29,29,29,29
57Ø DATA 29,29,29,29,29,29,29,29
58Ø DATA 29,29,29,29,29,29,28,28
59Ø DATA 28,28,28,28,27,27,27,27
6ØØ DATA 27,27,27,26,26,26,26,26
61Ø DATA 26,26,26,26,27,27,27,27
62Ø DATA 27,27,28,28,28,28,28,28
63Ø DATA 28,28,28,28,28,28,27,27
64Ø DATA 27,26,25,25,24,23,22,21
65Ø DATA 2Ø,19,17,16,15,13,12,11
66Ø DATA 9,8,7,6,5,4,3,2
67Ø DATA 1,1,Ø,Ø,Ø,Ø,Ø,1
68Ø DATA 1,2,3,4,6,7,9,11
69Ø DATA 13,15,17,19,21,24,26,29
7ØØ DATA 32,33,34,35,36,37,39,4Ø
71Ø DATA 41,42,43,44,45,46,47,48
72Ø DATA 49,5Ø,51,52,53,54,55,56
73Ø DATA 56,57,58,58,59,59,6Ø,6Ø
74Ø DATA 61,61,62,62,62,62,63,63
75Ø DATA 63,63,63,63,63,63,63,63
76Ø DATA 62,62,62,62,61,61,61,6Ø
77Ø DATA 6Ø,59,59,58,58,57,57,56
78Ø DATA 56,55,54,54,53,52,52,51
79Ø DATA 5Ø,5Ø,49,48,48,47,46,46
8ØØ DATA 45,44,44,43,42,42,41,41
81Ø DATA 4Ø,39,39,38,38,37,37,37
82Ø DATA 36,36,35,35,35,34,34,34
83Ø DATA 33,33,33,33,33,32,32,32
84Ø DATA 32,32,32,32,32,32,32,31
85Ø DATA 31,31,31,31,31,31,31,31
86Ø DATA 32,32,32,32,32,32,32,32
87Ø DATA 32,32,31,31,31,31,31,31
88Ø DATA 31,31,31,31,3Ø,3Ø,3Ø,3Ø
89Ø DATA 3Ø,29,29,29,28,28,28,27
9ØØ DATA 27,26,26,26,25,25,24,24
91Ø DATA 23,22,22,21,21,2Ø,19,19
92Ø DATA 18,17,17,16,15,15,14,13
93Ø DATA 13,12,11,11,1Ø,9,9,8
94Ø DATA 7,7,6,6,5,5,4,4
95Ø DATA 3,3,2,2,2,1,1,1
96Ø DATA 1,Ø,Ø,Ø,Ø,Ø,Ø,Ø
97Ø DATA Ø,Ø,Ø,1,1,1,1,2
98Ø DATA 2,3,3,4,4,5,5,6
99Ø DATA 7,7,8,9,1Ø,11,12,13
1ØØØ DATA 14,15,16,17,18,19,2Ø,2
1
1Ø1Ø DATA 22,23,24,26,27,28,29,3
Ø
1Ø2Ø DATA 32,32,33,34,35,35,36,3
7
1Ø3Ø DATA 38,38,39,4Ø,41,41,42,4
3
1Ø4Ø DATA 44,44,45,46,46,47,48,4
8
1Ø5Ø DATA 49,5Ø,5Ø,51,51,52,53,5
3
1Ø6Ø DATA 54,54,55,55,56,56,57,5
7
1Ø7Ø DATA 58,58,59,59,59,6Ø,6Ø,6
Ø
1Ø8Ø DATA 61,61,61,61,62,62,62,6
2
1Ø9Ø DATA 62,63,63,63,63,63,63,6
3
11ØØ DATA 63,63,63,63,63,63,63,6
3
111Ø DATA 62,62,62,62,62,61,61,6
1
112Ø DATA 61,6Ø,6Ø,6Ø,59,59,59,5
8
113Ø DATA 58,57,57,56,56,55,55,5
4
114Ø DATA 54,53,53,52,51,51,5Ø,5
Ø
115Ø DATA 49,48,48,47,46,46,45,4
4
116Ø DATA 44,43,42,41,41,4Ø,39,3
8
117Ø DATA 38,37,36,35,35,34,33,3
2
118Ø DATA 32,31,3Ø,29,28,28,27,2
6
119Ø DATA 25,25,24,23,22,22,21,2
Ø
12ØØ DATA 19,19,18,17,17,16,15,1
5
121Ø DATA 14,13,13,12,12,11,1Ø,1
Ø
122Ø DATA 9,9,8,8,7,7,6,6
123Ø DATA 5,5,4,4,4,3,3,3
124Ø DATA 2,2,2,2,1,1,1,1
125Ø DATA 1,Ø,Ø,Ø,Ø,Ø,Ø,Ø
126Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
127Ø DATA 1,1,1,1,1,2,2,2
128Ø DATA 2,3,3,3,4,4,4,5
129Ø DATA 5,6,6,7,7,8,8,9
13ØØ DATA 9,1Ø,1Ø,11,12,12,13,13
131Ø DATA 14,15,15,16,17,17,18,1
9
```

```
132Ø DATA 19,2Ø,21,22,22,23,24,2
5
133Ø DATA 25,26,27,28,28,29,3Ø,3
1
134Ø DATA Ø,255,Ø,255,75,255,Ø,2
55
135Ø DATA Ø,255,Ø,255,Ø,255,Ø,25
5
136Ø DATA Ø,255,Ø,255,Ø,255,Ø,52
137Ø DATA 112,48,141,251,227,31,
16,237
138Ø DATA 14Ø,222,76,237,14Ø,223
,76,237
139Ø DATA 14Ø,224,76,237,14Ø,225
,238,14Ø
14ØØ DATA 228,134,63,183,255,35,
55,6
141Ø DATA 16,131,255,255,16,39,Ø
,1ØØ
142Ø DATA 237,14Ø,192,55,6,237,1
4Ø,192
143Ø DATA 55,6,237,14Ø,192,55,6,
237
144Ø DATA 14Ø,192,55,2,167,14Ø,1
89,79
145Ø DATA 95,237,14Ø,165,237,14Ø
,167,237
146Ø DATA 14Ø,169,237,14Ø,171,16
,142,Ø
147Ø DATA 1Ø7,48,14Ø,148,166,148
,171,152
148Ø DATA 5,171,152,1Ø,171,152,1
5,183
149Ø DATA 255,32,236,1,227,3,237
,1
15ØØ DATA 236,6,227,8,237,6,236,
11
151Ø DATA 227,13,237,11,236,136,
16,227
152Ø DATA 136,18,237,136,16,49,6
3,39
153Ø DATA 2,32,2Ø6,1Ø6,141,255,1
17,38
154Ø DATA 196,22,255,146,53,24Ø,
4,25Ø
155Ø DATA Ø,Ø,Ø,Ø,4,25Ø,1,6
156Ø DATA Ø,Ø,Ø,Ø,Ø,6,Ø,1
157Ø DATA 255,255,112,Ø,Ø,Ø,Ø,Ø
158Ø DATA 112,Ø,1,3,Ø,3,Ø,4
159Ø DATA Ø,3,Ø,2,255,255,3,Ø
16ØØ DATA 8,Ø,8,Ø,3,Ø,2,8
161Ø DATA Ø,1Ø,Ø,1Ø,Ø,8,Ø,3
162Ø DATA 255,255,9,121,1Ø,21Ø,1
1,25Ø
163Ø DATA 13,63,16,1Ø,32,11,112,
13
164Ø DATA 48,13,128,16,9,121,1Ø,
21Ø
```


BEST

WE'VE CHOSEN THE BEST OF OVER 450 PROGRAMS AND PACKAGED THEM FOR YOU! 10 TO 12 PROGRAMS EACH PACKAGE. COLOR COMPUTER ONLY.

#1 Home Management I
Budget
Checkbook Balancer
Cost of Living
Tinycalc
Electronic Datebook
Account Manager
Stock Market
Word Processor
Lottery Analyst
Coco Database
Coco Terminal
Bartender

NEW!

#2 Home Management II
Video Cassette Organizer
Home Product Evaluation
Electric, Gas & Water Cost
Baseball Manager
Car Manager
Ham Radio Log
Home Inventory
Personal Directory
Recipe Machine
Disk Labeler
Password Scrambler
Disk Directory Print

#3 Education
Flash Card
Spanish Lessons
Typing Tutor
Creativity Test
Arithmetic Football
Cost of Living
Math Tutors 1 2
Trigonometry Tutor
Typing Game
Word Tests
Talking Alphabet
Clown Dunk Math

NEW!

#4 Adventures
Treasures of Barsoom
Killer Mansion
College Adventure
Coco-Terrestrial
Escape
Zector
Skid Row
Quest
Naughtie
Haunted House

#5 Games
Trek
Galactic Conquest
Warlords
The Power Sword
Steps
Robot Bomber
Force Field
Rat Attack
Caterpillar Cave
Meteor

#6 Utilities
Disk Dir Print
Dir Pack & Sort
Disk Zapper
Roll Out
Duss Buss
Disk Backup
51*24 Editor
51*24 Screen
Autocopy
Fastsort
Error Ignorer
Text Screen Print

Some of these programs above can sell for $29.95 each

$29.95 each TAPE OR DISK

★★ SPECIAL ★★
BUY 2 PACKAGES AND GET THIRD ONE FREE

VISA

RAINBOW CERTIFICATION SEAL

THE GREATEST SOFTWARE DEAL ON EARTH!

GET 12 DISKS OR TAPES A YEAR CONTAINING OVER 120 QUALITY PROGRAMS. A SUBSCRIPTION TO T & D SOFTWARE CONSISTS OF 10 READY-TO-LOAD PROGRAMS DELIVERED BY FIRST CLASS MAIL EVERY MONTH.

NO, WE ARE NOT THE SAME AS THE RAINBOW ON TAPE. IN FACT, MANY SUBSCRIBERS HAVE WRITTEN IN AND SAID THAT WE ARE MUCH BETTER THAN RAINBOW ON TAPE!

PRICES

	TAPE OR DISK
1 YEAR (12 issues)	70.00
6 MO. (6 issues)	40.00
1 ISSUE	9.00

Michigan Residents Add 4%
Overseas Add $10 to Subscription Price
Personal Checks Welcome

★ 16k-64k Color Computer
★ Over 3800 Satisfied Customers
★ Back Issues Available From
★ July '82 (Over 450 Programs)

OUR LATEST ISSUE CONTAINED
1 INCOME PROPERTY MANAGEMENT
2 BILL BOARD 2
3 MOUNTAIN BATTLE
4 THE TEN ROUND FIGHT
5 COCO - KEENO
6 HIGH RESOLUTION HOCKEY
7 LOGIC
8 ON SCREEN SCALE
9 LIBERTY SHIP
10 SINGLE STEP RUN

RAINBOW CERTIFICATION SEAL

★ THIS MONTH ONLY ★

SUBSCRIBE FOR A YEAR AND RECEIVE A FREE PACKAGE OF YOUR CHOICE. INDICATE WHICH ONE

1 Home Mgmt. I
2 Home Mgmt. II
3 Education
4 Adventures
5 Games
6 Utilities

GET ISSUE #45 ABOVE FOR ONLY $3.00

MasterCard

T & D SUBSCRIPTION SOFTWARE, P.O. BOX 256C, HOLLAND, MI 49423 (616) 396-7577

```
165Ø DATA 11,25Ø,13,63,16,7,25Ø,
8
166Ø DATA 24Ø,9,121,1Ø,21Ø,16,25
5,255
167Ø DATA 175,175,175,175,175,17
5,175,175
168Ø DATA 175,175,175,175,175,17
5,175,175
169Ø DATA 175,175,175,175,175,17
5,175,175
17ØØ DATA 175,175,175,175,175,17
5,175,175
171Ø DATA 175,188,19Ø,189,188,19
Ø,189,188
172Ø DATA 19Ø,189,188,19Ø,189,18
8,19Ø,189
173Ø DATA 188,19Ø,189,188,19Ø,18
9,188,19Ø
174Ø DATA 189,188,19Ø,189,188,19
Ø,189,175
175Ø DATA 175,179,187,183,179,18
7,183,179
176Ø DATA 187,183,179,187,183,17
9,187,183
177Ø DATA 179,187,183,179,187,18
3,179,187
178Ø DATA 183,179,187,183,179,18
7,183,175
179Ø DATA 175,128,186,181,128,18
6,181,128
18ØØ DATA 186,181,128,186,181,12
8,186,181
181Ø DATA 128,186,181,128,186,18
1,128,186
182Ø DATA 181,128,186,181,128,18
6,181,175
183Ø DATA 175,188,19Ø,189,188,19
Ø,189,188
184Ø DATA 19Ø,189,188,19Ø,189,18
8,19Ø,189
185Ø DATA 188,19Ø,189,188,19Ø,18
9,188,19Ø
186Ø DATA 189,188,19Ø,189,188,19
Ø,189,175
187Ø DATA 175,179,187,183,179,18
7,183,179
188Ø DATA 187,183,179,187,183,17
9,187,183
189Ø DATA 179,187,183,179,187,18
3,179,187
19ØØ DATA 183,179,187,183,179,18
7,183,175
191Ø DATA 175,128,186,181,128,18
6,181,128
192Ø DATA 186,181,2Ø7,2Ø7,2Ø7,2Ø
7,2Ø7,2Ø7
193Ø DATA 2Ø7,2Ø7,2Ø7,2Ø7,2Ø7,2Ø
7,128,186
```


The Coco Greeting Card Designer

The Coco Greeting Card Designer can be used to design and print custom Greeting Cards for all occasions including: Valentine's Day, Birthdays, Mother's Day and more

It's easy to use and includes a library of predrawn Hi-Res Graphic Pictures! You can write custom messages on the cover and inside your cards in a selection of character fonts and sizes. An easy to use editor allows you to pick your type style, font size, and more. Two fonts and a selection of custom border patterns are included, and the easy to use editors allow you to create many more!

The Coco Greeting Card Designer requires a Coco or Coco II with a minimum of 32k, One Disk Drive (Disk Ext BASIC 1.0/1.1, ADOS, or JODS). Some of the printers that the Greeting Card Designer supports are: EPSON RX/FX, GEMINI 10X or SG-10, C-ITOH 8510, DMP-100/105/400/430, SEIKOSHA GP-100/250, LEGEND 808 and GORILLA BANANA. Send an SASE for current list of other compatible printers. See Review in April 86 Rainbow . . .

Only: **$24.95**

Plus $3.00 Shipping & Handling
NY Residents add Sales Tax
UPS COD ADD $3.00
VISA/MC Accepted

ZEBRA SYSTEMS, INC.
78-06 Jamaica Avenue
Woodhaven, New York 11421
(718) 296-2385
Dealer Inquiries Invited

Colored Paper Packs — Now available are packs of 40 sheets of tractor-feed paper and 16 matching envelopes in bright RED, GREEN and BLUE. Perfect for making your card unforgettable!

Price $19.95

WICO TRACKBALL
Now $19.95
(Was $69.95)



You can benefit from our recent purchase of brand new WICO Trackball Controllers at closeout prices. This model was designed specifically for the Radio Shack Color Computer and plugs right into the joystick port.

WICO is the largest designer and manufacturer of control devices for the commercial arcade video games. If you've ever played an arcade video game, chances are you've used a WICO joystick or trackball. You've experienced the superior control. The pinpoint firing accuracy. The exceptional durability.

Includes one-year limited warranty. Phenolic ball offers 360-degree movement. Two optical encoders provide split-second response. Quick-action fire button for smooth, two handed arcade response and feel. Long 5' computer connection. Heavy duty plastic case for long hard use. Compatible with all color computer models.

ORDERING INSTRUCTIONS: Specify CAT# C331. Include $19.95 per trackball plus $3.00 for S&H. UPS COD Add $3.00, VISA/MC Accepted. NY Residents add sales tax.

ORDER NOW!
QUANTITIES ARE LIMITED.

Zebra Systems, Inc.
78-06 Jamaica Ave.
Woodhaven, NY 11421
(718) 296-2385

```
194Ø DATA 181,128,186,181,128,18
6,181,175
195Ø DATA 175,188,19Ø,189,188,19
Ø,189,188
196Ø DATA 19Ø,189,2Ø7,19,2Ø,1,18
,32
197Ø DATA 32,12,15,18,4,2Ø7,188,
19Ø
198Ø DATA 189,188,19Ø,189,188,19
Ø,189,175
199Ø DATA 175,179,187,183,179,18
7,183,179
2ØØØ DATA 187,183,2Ø7,2Ø7,2Ø7,2Ø
7,2Ø7,2Ø7
2Ø1Ø DATA 2Ø7,2Ø7,2Ø7,2Ø7,2Ø7,2Ø
7,179,187
2Ø2Ø DATA 183,179,187,183,179,18
7,183,175
2Ø3Ø DATA 175,128,186,181,128,18
6,1Ø4,67
2Ø4Ø DATA 1Ø5,113,121,12Ø,118,96
,66,89
2Ø5Ø DATA 96,82,11Ø,67,11Ø,68,65
,83
2Ø6Ø DATA 72,96,186,181,128,186,
181,175
2Ø7Ø DATA 175,188,19Ø,189,188,19
Ø,189,188
2Ø8Ø DATA 19Ø,189,188,19Ø,189,18
8,19Ø,189
2Ø9Ø DATA 188,19Ø,189,188,19Ø,18
9,188,19Ø
21ØØ DATA 189,188,19Ø,189,188,19
Ø,189,175
211Ø DATA 175,179,187,183,179,18
7,183,179
212Ø DATA 187,183,179,187,74,15,
25,19
213Ø DATA 2Ø,9,3,11,187,183,179,
187
214Ø DATA 183,179,187,183,179,18
7,183,175
215Ø DATA 175,128,186,181,128,18
6,181,128
216Ø DATA 186,181,128,186,181,12
8,186,15
217Ø DATA 18,186,181,128,186,181
,128,186
218Ø DATA 181,128,186,181,128,18
6,181,175
219Ø DATA 175,188,19Ø,189,188,19
Ø,189,188
22ØØ DATA 19Ø,189,188,19Ø,75,5,2
5,2
221Ø DATA 15,1,18,4,19Ø,189,188,
19Ø
222Ø DATA 189,188,19Ø,189,188,19
Ø,189,175
223Ø DATA 175,179,187,183,179,18
7,183,179
224Ø DATA 187,183,179,187,183,17
9,187,183
225Ø DATA 179,187,183,179,187,18
3,179,187
226Ø DATA 183,179,187,183,179,18
7,183,175
227Ø DATA 175,175,175,175,175,17
5,175,175
228Ø DATA 175,175,175,175,175,17
5,175,175
229Ø DATA 175,175,175,175,175,17
5,175,175
23ØØ DATA 175,175,175,175,175,17
5,175,175
231Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
232Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
233Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
234Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
235Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
236Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
237Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
238Ø DATA 255,Ø,Ø,Ø,Ø,Ø,Ø,Ø
239Ø DATA Ø,Ø,3,Ø,255,2,255,Ø
24ØØ DATA 255,Ø,255,Ø,255,255,24
3,48
241Ø DATA 192,2Ø4,12,63,243,51,3
,192
242Ø DATA 252,24Ø,192,48,2Ø4,2Ø7
,192,192
243Ø DATA 48,12,15,195,51,255,12
,12
244Ø DATA 2Ø4,76,252,17Ø,17Ø,17Ø
,17Ø,17Ø
245Ø DATA 17Ø,17Ø,17Ø,Ø,255,Ø,25
5,Ø
246Ø DATA 255,Ø,255,Ø,Ø,Ø,255,Ø
247Ø DATA 63,2Ø7,243,252,3,Ø,23,
8
248Ø DATA 152,142,56,44,159,114,
142,53
249Ø DATA 37,191,1,13,182,255,3,
138
25ØØ DATA 1,183,255,3,23,3,182,1
27
251Ø DATA 47,65,127,47,66,127,47
,67
252Ø DATA 127,47,68,127,47,73,2Ø
4,44
253Ø DATA 226,253,44,21,23,252,8
8,23
254Ø DATA 252,85,23,252,82,23,25
```

DISTO
SUPER CONTROLLER

RAINBOW

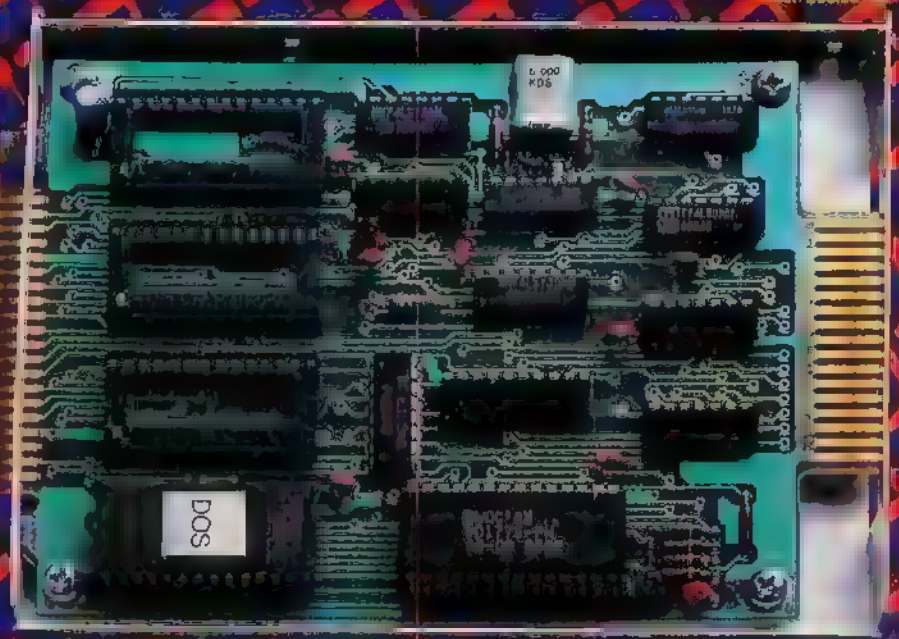

FEATURES:
- Gold contacts on all connectors.
- Shielded metal box for low RF noise.
- 4 28-pin sockets for software expandability.
- Uses 2764 or 27128 EPROMS.
- EPROMS are software selectable.
- Internal Mini-Expansion Bus interface for:
  - 80 Columns
  - Real Time Clock and/or
  - Parallel Printer or
  - EPROM Programmer or
  - User Projects.
- Complete Radio Shack compatibility.
- New technology, no adjustments needed.
- Very Accurate 16mhz High Speed Master Clock.
- Needs + 5 volts only, works on all COCOs or COCO IIs.

EXPANSION ADD-ONS:
There are currently four add-ons available from DISTO for this controller.

PPRINT
The first is a Centronics compatible Parallel Printer adapter. This adapter will allow you to connect a Centronics compatible printer directly to your controller, leaving the serial port of your computer free for your modem. Printer driver software included.

RTIME
The second is a Real Time Clock. This is a clock chip that will keep the proper time, date and year. A small battery keeps the time when the Computer is off, retreive and set the time by using simple Basic POKES. Also available with the Real Time Clock is the optional Centronics Compatible Parallel Printer adapter. Software to set the clock and printer driver included.

MPROM
The third is a Mini EPROM Programmer. Yes, a low cost programmer that attaches to the disk controller. A must for the DISTO Super Controller. Program those often used utilities into EPROM and plug them directly into your controller. Will program 2764's or 27128's, a perfect mate for the DISTO Super Controller.

DISPLAY80
The fourth is a real knock-out. This is a three in one card. Its major function is to add an 80 * 24 display to your computer. A feature packed package also includes RTIME and PPRINT. All in one neat package that fits inside the controller. OS9 software available. Call for more information.

CREDITS:
The DISTO Super Controller, add-ons and all its documentation are conceived and designed by Tony DiStefano. The DISTO Super Controller and add-ons are manufactured and distributed by: C.R.C. COMPUTER INC. 14802 Lajeunesse, Montréal, Québec, Canada, H3L 2E8 (514-383-[illegible])

DISTO and CRC Computers are registered trademarks. The DISTO Super Controller and add-ons are copywrited by DISTO.

```
2,79
255Ø DATA 189,161,193,134,251,18
3,255,2
256Ø DATA 182,255,Ø,132,2,39,14,
134
257Ø DATA 247,183,255,2,182,255,
Ø,132
258Ø DATA 2,38,232,32,3,115,47,7
3
259Ø DATA 134,3,183,47,74,23,3,1
1
26ØØ DATA 134,64,183,47,48,23,5,
192
261Ø DATA 127,47,76,2Ø4,5,4,253,
54
262Ø DATA 213,23,3,231,22,4,218,
182
263Ø DATA 47,75,142,4,76,72,76,6
4
264Ø DATA 48,134,14Ø,Ø,Ø,46,249,
125
265Ø DATA 47,14Ø,16,38,Ø,141,125
,47
266Ø DATA 73,39,27,182,255,Ø,68,
36
267Ø DATA 5,127,47,76,32,3,115,4
7
268Ø DATA 76,173,159,16Ø,1Ø,182,
1,9Ø
269Ø DATA 129,32,37,89,32,31,189
,161
27ØØ DATA 193,252,1,88,193,247,3
9,5
271Ø DATA 127,47,76,32,3,115,47,
76
272Ø DATA 129,247,39,9,182,1,87,
129
273Ø DATA 247,39,58,32,26,182,47
,48
274Ø DATA 129,12Ø,39,19,16,142,4
7,123
275Ø DATA 198,172,23,5,1Ø3,182,4
7,48
276Ø DATA 76,183,47,48,23,5,65,1
82
277Ø DATA 47,48,198,172,253,54,2
Ø5,2Ø4
278Ø DATA 17Ø,184,253,56,9,198,4
,2Ø6
279Ø DATA 47,1Ø5,247,56,11,255,5
4,2Ø3
28ØØ DATA 23,6,246,32,22,182,47,
48
281Ø DATA 129,2,39,219,16,142,47
,123
282Ø DATA 198,172,23,5,47,182,47
,48
283Ø DATA 74,32,198,182,47,44,38
```

'KEEP-TRAK' General Ledger Reg. $69.95—ONLY $24.95

Double-Entry General Ledger Account ng System for home or business 16k 32k 64k User-friendly, menu-driven Program features balance sheet income & expense s.atement (current & YTD) journa ledger 899 accounts & 2350 entr es on 32k & 64k (710 accounts & entries on 16k) (d sk on y Version 1 2 has screen pr ntouts Rainbow Rev ews 1 1 9/84 2 4/85

"OMEGA FILE" Reg. $69.95—ONLY $19.95

F ling data base F le any information with Omega F le Records can have up to 16 fie ds w th 255 characters per f e d 4080 characters record) Sort match & print any f eld User fr end y menu driven Manual ncluded (32k/64k disk only)
Rainbow Review 3/85, Hot CoCo 10/85

BOB'S MAGIC GRAPHIC MACHINE

Can generate BASIC code to use in your programs Easy drawing and man p- u ation of circles e ipses, boxes, nes and ARCS Single oystick operation with on line HELPS at a t mes A lows text on the graphics screen & movement of objects on the screen Can be used as a stand-a one graphics editor Instruct on Manua
GRAPHICS EDITOR.Reg $39.95—ONLY $19 95 for disk or tape 64k ECB
Rainbow Review 7 85 Hot CoCo 9/85 **"The graphics bargain of the year"**

'KEEP-TRAK' Accounts Receivable. (Avail. 10/01/85)

Features auto nterest ca culat on, auto ageing of accounts, nstal ment sales tota due sales explanat on space as long as you need detailed statements. KEEP-TRAK Genera Ledger tie in, account number check ng, cred t limit checking & more User friendly/menu driven Includes manual **$39.95** or **$49.95** General Ledger & Accounts Receivables. (Disk On y)

'COCO WINDOWS' Availab e 10/31/85

With h res character display and window generator Features an enhanced key board (klicks) and 10 programmable function keys A lows the user to create mul ple windows from bas c nc udes menu driven pr nter setup and auto l ne number ng Four funct on ca culator w th memory The above opt ons can be called anytime wh le running or writing in BASIC APPLE PULL YOUR DRAPES. YOU DON'T WANT TO SEE THIS. **$19.95** (disk or tape) nc udes manual.

CALL TOLL FREE

1–800–942–9402

VISA MasterCard

THE OTHER GUY S SOFTware (Add $2.50 for postage & handling)
P.O. Box H, 55 N. Main C.O.D., Money Order Check in U.S. Funds
Logan UT 84321 (801) 753-7820 (Please specify if J&M controller)

Submitting Material To Rainbow

Contributions to THE RAINBOW are welcome from everyone. We like to run a variety of programs that are useful/helpful/fun for other CoCo owners.

Program submissions must be on tape or disk and it is best to make several saves, at least one of them in ASCII format. We're sorry, but we do not have time to key in programs. All programs should be supported by some editorial commentary explaining how the program works. Generally, we're much more interested in how your submission works and runs than how you developed it. Programs should be learning experiences.

We do pay for submissions, based on a number of criteria. Those wishing remuneration should *so state* when making submissions.

For the benefit of those who wish more detailed information on making submissions, please send a self-addressed, stamped envelope (SASE) to: Submissions Editor, THE RAINBOW, The Falsoft Building, P.O. Box 385, Prospect, KY 40059. We will send you some more comprehensive guidelines.

Please do not submit programs or articles currently submitted to another publication.

```
,39
284Ø DATA 182,47,76,16,39,1,53,2
Ø6
285Ø DATA 44,166,255,44,21,23,25
1,87
286Ø DATA 127,47,76,115,47,44,18
2,47
287Ø DATA 48,139,2,198,171,253,4
7,46
288Ø DATA 16,142,47,44,23,5,22,2
52
289Ø DATA 47,46,193,34,35,19,9Ø,
247
29ØØ DATA 47,47,23,4,166,182,47,
45
291Ø DATA 164,132,167,132,48,136
,32,32
292Ø DATA 12,127,47,44,127,47,46
,127
293Ø DATA 47,47,23,4,142,198,17Ø
,231
294Ø DATA 132,22,Ø,232,99,132,11
1,1
295Ø DATA 182,47,77,198,34,237,2
,253
296Ø DATA 54,2Ø5,2Ø4,67,18,253,5
6,9
297Ø DATA 247,56,11,23,6,1Ø7,2Ø6
,44
298Ø DATA 186,255,44,21,22,25Ø,2
4Ø,125
299Ø DATA 47,14Ø,16,38,Ø,136,129
,12Ø
3ØØØ DATA 34,13,129,2,37,9,193,3
4
3Ø1Ø DATA 37,9,193,17Ø,34,5,57,9
6
3Ø2Ø DATA 196,32,243,96,65,57,12
5,47
3Ø3Ø DATA 14Ø,38,9,16,142,47,115
,236
3Ø4Ø DATA 2,23,4,128,2Ø4,5,5,253
3Ø5Ø DATA 47,78,182,47,48,198,17
2,253
3Ø6Ø DATA 47,82,236,2,253,47,8Ø,
23
3Ø7Ø DATA 4,2,43,75,252,47,46,25
3
3Ø8Ø DATA 47,82,23,3,247,43,3Ø,2
36
3Ø9Ø DATA 2,125,47,14Ø,38,56,235
,65
31ØØ DATA 171,196,237,2,253,54,2
Ø5,2Ø4
311Ø DATA 168,184,253,56,9,198,4
,247
312Ø DATA 56,11,22,5,244,127,47,
44
```


PERRY COMPUTERS

COLOR COMPUTERS	LIST PRICE	OUR PRICE
26-3136 16K Standard Color Computer 2	$119 95	$ 99 00
26-3127 64K Extended Color Computer 2	199 95	169.00
26-3131 Disk Drive 0 for Color Computer	299 95	240 00
26-3130 Disk Drive 1 for Drive 0	199 95	169 00
26-3008 Joystick	19 95	16 95
26-3012 Deluxe Joystick (EACH)	29 95	25 00
26-3018 Extended Basic Kit	39 95	36 00
26-1208 CCR-81 Tape Recorder	59 95	50 00
26-1173 DCM-3 Direct Connect Modem	59 95	50 00

SOFTWARE		
30001210 Telewriter 64 Tape	$ 49 95	$ 42.00
30001220 Telewriter 64 Disk	59 95	49 00
30001110 VIP Writer	69 95	59 00
30001140 VIP Database	59 95	49 00
30001150 VIP Terminal Disk	49 95	45 00
30001170 VIP Integrated Software	149 95	139 00
30001130 SS/DD 10 Pack Diskettes	21 00	14.00

PRINTERS AND ACCESSORIES		
26-1276 DMP-105 80 cps Dot Matrix	$199 95	$169 00
26-1280 DMP-130 Dot Matrix	349 95	285 00
20001025 EPSON LX-80 Printer	369 95	225 00
20001515 EPSON LX-80 Tractor Feed	29 95	25 00
20021070 OKIDATA 182 Printer	299 00	245 00
20041020 STAR SG-10 Printer	299 00	250 00
30009110 BOTEK Serial to Parallel Interface		59 00

TANDY COMPUTERS	LIST PRICE	OUR PRICE
26-1070 Model 4D Desktop 64K 2 FD & Deskmate	$1199 00	$ 895 00
25-1000 Model 1000 1 FD 128K & Deskmate	999 00	705 00
25-1001 Model 1000 1 FD & 10 Meg HD 256K	1999 00	1475.00
25-3000 Model 1200 1 FD & 10 Meg HD 256K	2499.00	1525 00
25-3001 Model 1200 Two FD 256K	1499 00	1200 00
25-4000 Model 3000 One FD 512K	2599 00	1900 00
25-4010 Model 3000 1 FD & 20 Meg HD 512K	3599 00	2600 00
26-3901 Model 600 Port Comp 32K 1 3½ Disk	1599 00	1195 00
25-1021 CM4 Color Monitor	299 95	225 00
25-1022 CM10 Color Monitor	459 95	380.00
25-3010 VM-3 Monochrome Monitor	219 00	185 00
26-5111 VM-1 Monochrome Monitor	199 95	165 00
26-5112 CM-1 Color Monitor	599 00	510 00
25-3043 Graphics Adaptor T-1200, T-3000	299 00	185 00
25-3047 Deluxe Graphics Adapt T-1200 T-3000	499 95	395 00
25-3130 MS-DOS 2 11/Basic Tandy 1200	89 95	75 00
25-4104 MS-DOS 3.1/Basic/Deskmate Tandy 3000	99 95	85 00

CALL TOLL FREE 1-800-248-3823

For Technical Questions and Information on our complete line of computer accessories and current prices

CALL 1-517-625-4161

Mon.-Fri. 9-5, Sat. 9-3

All prices and offers may be changed or withdrawn without notice Advertised prices are cash prices. C.O.D accepted ($10.00 charge per carton on C.O.D. Call for further C.O.D information.) M.C. Visa, add 2%. A.X., add 3% All non-defective items returned will be subject to 10% restocking fee. Defective items require return merchandise authorization. Call for R.M.A. Number before returning Delivery is subject to product availability

PERRY COMPUTERS • 124 SOUTH MAIN STREET • PERRY, MI 48872

CINSOFT
PROGRAMS • PERIPHERALS • SUPPLIES • SERVICE

For Coco . . .
in the Midwest

Now in our 4th year!

New Catalog Now Available
CALL OR WRITE

Introducing . . .

SEIKOSHA

SP-1000A



- 100 cps draft
- 20 cps NLQ
- Friction and tractor
- Front panel Controls
- 1.5 K buffer
- 2 yr. Warranty

Parallel printer $225.00

with Metric Industries Model 104 interface $269.00

"The New Leader in Price-Performance!"

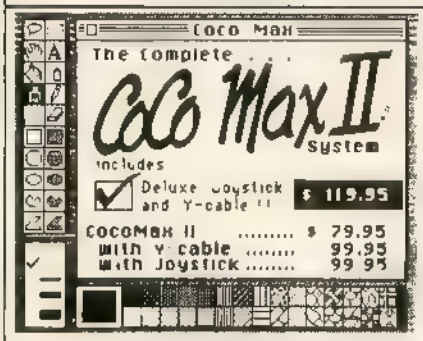

LATEST VERSION FEATURES . . .

- 14 fonts
- Shrink, Stretch Rotate
- Multiple drives
- Pattern Save

UPGRADES AVAILABLE

Disk I to II 20.00
Tape I to Disk II 25.00
Max Edit 19.95
Picture disks available

New! DELUXE JOYSTICK

RAINBOW CERTIFICATION

EXCELLENT FOR COLOR COMPUTER
USE IT FOR GRAPHICS, GAMES, ETC.

CoCo owners will appreciate this high quality, durable joystick. Open gimbal design ... self-centering or free-floating operation. Mechanical trims on both axes ... eight foot cable ... firing button has lifetime 5,000,000 presses. A two-button version of the Deluxe Joystick is available for the Tandy 1000. DEALER INQUIRIES INVITED

$27.50 each
$49.95/pair

CHOOSE FROM OUR LARGE SELECTION OF COCO PRODUCTS

B5 ... Colorware ... Derringer ... Diecom ... Dynacalc ... Elite ... Four Star ... HJL ... J & M . Mark Data ... Metric Industries ... Michtron ... Microcom ... Microworks ... Tom Mix ... PBJ ... PXE .. Speech Systems ... Sugar ... TCE ... VIP ... Zebra ... and more!

Yes! We have PENPAL!

• Call • 513-396-SOFT

• Shop by Modem • 513-396-SHOP

VISA AMERICAN EXPRESS

• Write •
2235 Losantiville, Cincinnati, OH 45237

SHIPPING will be charged at our ACTUAL COST
Ohio residents add 5.5% Sales Tax COD add 2.00

```
313Ø DATA 127,47,46,127,47,47,99
,1
314Ø DATA 182,47,75,76,198,225,6
1,23
315Ø DATA 3,177,236,2,23,255,96,
122
316Ø DATA 47,133,16,39,2,1ØØ,57,
23
317Ø DATA 1,51,32,217,125,47,14Ø
,38
318Ø DATA 245,182,47,48,16Ø,2,42
,1
319Ø DATA 64,129,1Ø,35,1,57,16,1
42
32ØØ DATA 47,24,49,36,16,14Ø,47,
44
321Ø DATA 39,17,166,164,38,244,9
9,164
322Ø DATA 236,2,139,2,2Ø3,4,237,
34
323Ø DATA 23,4,2,57,125,47,132,1
6
324Ø DATA 38,2,93,142,47,8,182,4
7
325Ø DATA 75,129,3,35,2,134,3,13
9
326Ø DATA 1,177,47,133,35,6,182,
47
327Ø DATA 133,183,47,141,183,47,
131,166
328Ø DATA 132,38,6Ø,125,47,141,3
8,97
329Ø DATA 182,47,84,139,1,132,3,
183
33ØØ DATA 47,84,167,136,43,198,5
,61
331Ø DATA 52,16,2Ø6,47,85,51,197
,255
332Ø DATA 54,2Ø3,23,254,2Ø7,53,1
6,166
333Ø DATA 2,177,47,48,37,7,134,2
55
334Ø DATA 167,136,41,32,5,134,1,
167
335Ø DATA 136,41,134,1,167,136,4
2,51
336Ø DATA 136,41,236,2,23,254,2Ø
8,166
337Ø DATA 66,198,5,61,16,142,47,
85
338Ø DATA 49,165,16,191,54,2Ø3,5
2,16
339Ø DATA 23,254,219,53,16,52,16
,23
34ØØ DATA 255,74,53,16,122,47,13
1,39
341Ø DATA 4,48,4,32,146,142,47,2
8
```

```
342Ø DATA 166,132,39,55,236,2,92
,231
343Ø DATA 3,52,16,23,3,19,53,32
344Ø DATA 193,1,39,23,193,3,39,1
1
345Ø DATA 166,33,164,132,167,132
,48,136
346Ø DATA 224,32,13,23Ø,35,193,1
71,35
347Ø DATA 239,141,66,111,164,48,
136,224
348Ø DATA 23Ø,33,2Ø2,85,83,234,1
32,231
349Ø DATA 132,31,33,48,4,14Ø,47,
44
35ØØ DATA 38,19Ø,142,47,8,166,1,
39
351Ø DATA 13,16,142,47,115,236,2
,23
352Ø DATA 3,2,111,132,111,1,48,4
353Ø DATA 14Ø,47,24,38,232,122,4
7,14Ø
354Ø DATA 43,3,22,253,34,134,3,1
83
355Ø DATA 47,14Ø,22,253,26,122,4
7,74
356Ø DATA 39,5Ø,2Ø6,44,2Ø6,255,4
4,21
357Ø DATA 23,249,28,2Ø6,16,31,19
8,85
358Ø DATA 231,196,51,2ØØ,32,17,1
31,17
359Ø DATA 159,37,245,182,47,74,3
9,4
36ØØ DATA 129,3,37,2,134,3,198,2
55
361Ø DATA 2Ø6,16,31,51,2ØØ,96,23
1,196
362Ø DATA 74,38,248,57,16,2Ø6,12
7,Ø
363Ø DATA 16,142,47,123,182,47,4
8,198
364Ø DATA 172,23,2,16Ø,19Ø,47,65
,188
365Ø DATA 47,69,37,3Ø,39,11,191,
47
366Ø DATA 69,19Ø,47,67,191,47,71
,32
367Ø DATA 17,19Ø,47,67,188,47,71
,37
368Ø DATA 9,191,47,71,19Ø,47,65,
191
369Ø DATA 47,69,22,4,211,79,183,
255
37ØØ DATA 198,183,255,2Ø1,183,25
5,2Ø2,183
371Ø DATA 255,2Ø4,183,255,2Ø6,18
3,255,2Ø8
```


Canadians!

We are Canada's largest distributor of Color Computer products.

Send for your free copy of our 1986 Catalog

Kellynews-3 is now available and contains news, hints, programs and articles from the crew of Kelly Software.

Please note our new phone number.

Phone: (403) 236-2161

We have moved to our new location.

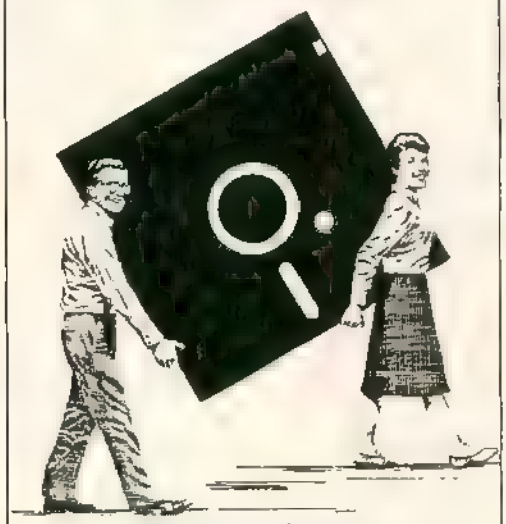

Kelly Software Distributors Ltd.
P.O. Box 608, Station 'T' Calgary Alberta T5H 2H2

Call now . . .

(403) 236-2161

Call our orderline for quick delivery

We accept phone orders on your VISA or Master Card No C.O.D

```
372Ø DATA 183,255,21Ø,183,255,19
2,183,255
373Ø DATA 194,183,255,196,183,25
5,34,142
374Ø DATA 45,8,16,142,4,Ø,236,12
9
375Ø DATA 237,161,16,14Ø,6,Ø,37,
246
376Ø DATA 19Ø,47,69,191,54,12,19
Ø,47
377Ø DATA 71,191,54,14,23,2,221,
142
378Ø DATA 4,2Ø,141,4Ø,19Ø,47,65,
191
379Ø DATA 54,12,19Ø,47,67,191,54
,14
38ØØ DATA 23,2,2Ø1,142,5,249,141
,2Ø
381Ø DATA 142,Ø,Ø,191,54,12,134,
Ø
382Ø DATA 246,47,75,253,54,14,23
,2
383Ø DATA 179,142,5,238,2Ø6,54,8
,198
384Ø DATA 3,166,197,132,15,139,4
8,167
385Ø DATA 13Ø,166,197,68,68,68,6
8,139
386Ø DATA 48,167,13Ø,9Ø,43,2,32,
233
387Ø DATA 26,16,57,79,183,255,19
8,183
388Ø DATA 255,2ØØ,183,255,2Ø2,18
3,255,2Ø5
389Ø DATA 183,255,2Ø6,183,255,2Ø
8,183,255
39ØØ DATA 21Ø,183,255,192,183,25
5,195,183
391Ø DATA 255,197,182,47,75,132,
3,198
392Ø DATA 8,61,2Ø3,224,247,255,3
4,28
393Ø DATA 175,57,142,2Ø,64,2Ø4,1
7Ø,17Ø
394Ø DATA 237,129,14Ø,37,96,37,2
49,16
395Ø DATA 2Ø6,127,Ø,134,1,183,47
,24
396Ø DATA 183,47,132,182,47,74,7
6,183
397Ø DATA 47,74,23,254,19Ø,127,4
7,25
398Ø DATA 182,47,77,183,47,26,13
4,34
399Ø DATA 183,47,27,134,4,183,47
,135
4ØØØ DATA 16,142,47,115,252,47,2
6,23
4Ø1Ø DATA 1,122,252,47,26,253,47
,8Ø
4Ø2Ø DATA 252,47,46,253,47,82,2Ø
4,5
4Ø3Ø DATA 5,253,47,78,23,Ø,253,4
3
4Ø4Ø DATA 88,125,47,14Ø,38,54,18
2,47
4Ø5Ø DATA 26,187,47,24,183,47,26
,129
4Ø6Ø DATA 121,37,11,112,47,24,12
4,47
4Ø7Ø DATA 27,124,47,27,32,18,129
,1
4Ø8Ø DATA 34,14,112,47,24,124,47
,27
4Ø9Ø DATA 124,47,27,134,4,183,47
,135
41ØØ DATA 246,47,27,193,17Ø,36,5
8,122
411Ø DATA 47,135,39,236,2Ø6,47,1
1Ø,255
412Ø DATA 54,2Ø3,252,47,26,253,5
4,2Ø5
413Ø DATA 2Ø4,168,184,253,56,9,1
98,4
414Ø DATA 247,56,11,23,2,195,22,
254
415Ø DATA 2Ø,124,47,75,182,47,75
,72
416Ø DATA 72,72,198,255,61,23,Ø,
131
417Ø DATA 127,47,44,127,47,46,12
7,47
418Ø DATA 47,198,16,247,47,133,1
27,47
419Ø DATA 141,127,47,84,127,47,8
,127
42ØØ DATA 47,12,127,47,16,127,47
,2Ø
421Ø DATA 127,47,9,127,47,13,127
,47
422Ø DATA 17,127,47,21,127,47,13
2,127
423Ø DATA 47,28,127,47,32,127,47
,36
424Ø DATA 127,47,4Ø,127,47,44,16
,2Ø6
425Ø DATA 127,Ø,134,3,183,47,14Ø
,23
426Ø DATA 254,2Ø1,22,25Ø,226,182
,255,3
427Ø DATA 43,1,59,182,255,2,182,
47
428Ø DATA 77,139,7,129,12Ø,34,16
,183
429Ø DATA 47,77,134,251,183,255,
2,182
```

XTEAM & OS-9



BOTH WINNERS

XTERM
OS-9 Communications program.

- Menu oriented
- Upload/download. Ascii or XMODEM protocol
- Execute OS-9 commands from within XTERM
- Definable macro keys
- Works with standard serial port, RS232 PAK, or PBJ 2SP Pack, Includes all drivers.
- Works with standard screen. XSCREEN, or WORDPAK 80 column board.

$49.95 with source **$89.95**

XMENU
Creates a menu driven environment for OS-9.

- Create your own menus
- Works with standard screen, XSCREEN, WORDPAK, O-PAK

$29.95 with source **$59.95**

XSCREEN
OS-9 hi-res screen

- 51/64/85 chars per line
- Easy menu operation

$19.95 with source **$39.95**

XDIR & XCAL

Hierarchial directory
- Full sorting
- Complete pattern matching

OS-9 calculator
- Decimal, Hex, Binary
- +, -, *, /, AND,OR, XOR, NOT

$24.95 with source **$49.95**

XDIS
OS-9 disassembler

$34.95 with source **$54.95**

XWORD
OS-9 word processing system

- Works with standard text screen, XSCREEN, WORDPAK, or O-PAK
- True character oriented full screen editing
- Full block commands
- Find and Replace commands
- Execute OS-9 commands from within
- Proportional spacing supported
- Full printer control, character size, emphasized, italics, overstrike, underline, super/sub-scripts
- 10 header/footers
- Page numbering in decimal or Roman numerals
- Margins and headers can be set different for even and odd pages

$69.95 with source **$124.95**

XMERGE
Mail merge capabilities for XWORD

$24.95 with source **$49.95**

XSPELL
OS-9 spelling checker, with 20000 and 40000 word dictionaries

$39.95

XTRIO
XWORD/XMERGE/XSPELL

$114.95 with XWORD/XMERGE source **$199.95**

XED
OS-9 full screen editor

$39.95 with source **$79.95**

AND FOR RS DOS ...

SMALL BUSINESS ACCOUNTING

This sales-based accounting package is designed for the non-accounting oriented businessman. It also contains the flexibility for the accounting oriented user to set up a double entry journal with an almost unlimited chart of accounts. Includes Sales Entry, transaction driven Accounts Receivable and Accounts Payable, Journal Entry, Payroll Disbursement, and Record Maintenance programs. System outputs include Balance Sheet, Income Statement, Customer and Vendor status Reports, Accounts Receivable and Payable Aging Reports, Check Register, Sales Reports, Account Status Lists, and a Journal Posting List. **$79.95**

INVENTORY CONTROL/SALES ANALYSIS

This module is designed to handle inventory control, with user defined product codes, and produce a detailed analysis of the business' sales and the sales force. One may enter/update inventory data, enter sales, run five sales analysis reports, run five inventory reports, set up product codes, enter/update salesman records, and update the SBAP inventory. **$59.95**

PAYROLL

Designed for maintaining personnel and payroll data for up to 200 hourly and salaried employees with 8 deductions each. Calculates payroll and tax amounts, prints checks and maintains year-to-date totals which can be automatically transferred to the SBA package. Computes each pay period's totals for straight time, overtime and bonus pay and determines taxes to be withheld. Additional outputs include mailing list, listing of employees, year-to-date federal and/or state tax listing, and a listing of current misc. deductions Suited for use in all states except Oklahoma and Delaware. **$59.95**

These programs are user friendly and menu driven. Sample transactions are included Each package features a hi-res screen. Each requires a printer, a minimum of 32k and at least 1 disk drive.

ACCOUNTS RECEIVABLE

Includes detailed audit trails and history reports for each customer, prepares invoices and monthly statements, mailing labels, aging lists, and an alphabetized customer listing. The user can define net terms for commercial accounts or finance charges for revolving accounts. This package functions as a standalone A/R system or integrates with the Small Business Accounting package. **$59.95**

ACCOUNTS PAYABLE

Designed for the maintenance of vendor and A/P invoice files. The system prints checks, voids checks, cancels checks, deletes cancelled checks, and deletes paid A/P invoices. The user can run a Vendor List, Vendor Status report, Vendor Aged report, and an A/P Check Register. This package can be used either as a standalone A/P system or can be integrated with the Small Business Accounting Package. **$59.95**

MICROTECH CONSULTANTS INC.

1906 Jerrold Avenue
St. Paul, MN 55112

Dealer Inquiries Invited
Author Submissions accepted
OS-9 is a trademark of Microware

Ordering Information

Add $3.00 shipping & handling, MN residents add 6% sales tax. Visa, Mastercard, COD (add $2.50), personal checks.

(612) 633-6161

```
43ØØ DATA 255,Ø,132,64,39,5,59,1
28
431Ø DATA 118,32,236,189,161,193
,134,254
432Ø DATA 183,255,2,182,255,Ø,13
2,64
433Ø DATA 38,244,59,243,47,67,25
3,47
434Ø DATA 67,252,47,65,2Ø1,Ø,137
,Ø
435Ø DATA 253,47,65,57,252,47,8Ø
,241
436Ø DATA 47,83,34,21,177,47,82,
34
437Ø DATA 16,243,47,78,241,47,83
,37
438Ø DATA 8,177,47,82,37,3,134,2
55
439Ø DATA 57,79,57,183,47,134,68
,68
44ØØ DATA 183,54,221,134,32,61,2
43,54
441Ø DATA 223,251,54,221,137,Ø,3
1,1
442Ø DATA 57,141,232,182,54,221,
72,72
443Ø DATA 176,47,134,64,23Ø,132,
74,43
444Ø DATA 4,84,84,32,249,196,3,5
7
445Ø DATA 198,172,141,2Ø7,16,142
,47,123
446Ø DATA 236,132,237,161,236,13
6,32,237
447Ø DATA 161,236,136,64,237,161
,236,136
448Ø DATA 96,237,164,57,52,16,14
1,179
449Ø DATA 236,161,237,132,236,16
1,237,136
45ØØ DATA 32,236,161,237,136,64,
236,164
451Ø DATA 237,136,96,53,144,141,
156,182
452Ø DATA 54,221,72,72,176,47,13
4,64
453Ø DATA 2Ø6,47,136,23Ø,198,231
,33,228
454Ø DATA 132,231,132,57,41,Ø,25
5,Ø
455Ø DATA 255,Ø,255,Ø,255,Ø,255,
Ø
456Ø DATA Ø,Ø,Ø,1,Ø,Ø,Ø,2
457Ø DATA Ø,Ø,Ø,4,Ø,Ø,Ø,8
458Ø DATA Ø,Ø,Ø,22,Ø,Ø,Ø,5Ø
459Ø DATA Ø,Ø,Ø,1ØØ,Ø,Ø,1,4Ø
46ØØ DATA Ø,Ø,2,86,Ø,Ø,5,18
461Ø DATA Ø,Ø,16,36,Ø,Ø,32,72
462Ø DATA Ø,Ø,64,15Ø,Ø,Ø,129,146
463Ø DATA Ø,1,99,132,Ø,3,39,1Ø4
464Ø DATA Ø,6,85,54,Ø,19,16,114
465Ø DATA Ø,38,33,68,Ø,82,66,136
466Ø DATA 1,4,133,118,2,9,113,82
467Ø DATA 4,25,67,4,8,56,134,8
468Ø DATA 22,119,114,22,51,85,68
,5Ø
469Ø DATA 1Ø3,16,136,1ØØ,16,142,
54,12
47ØØ DATA 127,54,8,127,54,9,127,
54
471Ø DATA 1Ø,127,54,11,142,54,16
,166
472Ø DATA 13Ø,198,9,14Ø,54,11,39
,5Ø
473Ø DATA 9Ø,39,244,49,36,68,36,
248
474Ø DATA 238,164,255,54,4,238,3
4,255
475Ø DATA 54,6,52,118,141,4,53,1
18
476Ø DATA 32,23Ø,2Ø6,54,12,16,14
2,54
477Ø DATA 12,142,54,8,198,4,28,2
54
478Ø DATA 166,13Ø,169,162,25,167
```


TOTHIAN SOFTWARE

TIME MASTER Calendars, biorhythms, human compatibility, more. Fun at parties. Printer optional. Reviewed 12/85. 16K ECB. $19.95

PERPETULIFE Challenging board game based on Life. Play a friend or play (lose to) CoCo. Reviewed 4/86. 16K ECB/ML. $19.95

GRAPHIC ECHO New! Versatile graphic screen dump for RS dot matrix printers. Regular or enlarged images. Positive or negative images. Adjustable margin or auto-centering. Works in all 5 PMODEs. 16K/32K ML. $14.95

TEACHER PAK PLUS The works for teachers. $47.95

HOMEWARE New! Give your CoCo real power at home. Printer preferred. Works with tape or disk. Five 16K ECB/ML modules:
- CALENDAR - Draw calendars for any date. Various formats. Add appointments, memos.
- SAVINGS/LOANS - Work out a personal savings plan. Decide if you can afford that loan.
- DIRECTORY - Keep track of phone numbers, addresses, etc. Print address labels.
- INVENTORY - For home insurance records, hobbies, small business. Very flexible.
- HOME-WRITER - ML word processing powerful enough for home use but easy enough to be totally mastered in one short sitting.

Single modules: $19.95 Whole set: $49.95

All programs sold on tape. Send check or money order, no cash (Pa. residents add 6%) to:

Tothian Software, Inc
Box 663
Pimersburg, Pa 16248

All of these programs carry the Rainbow Seal.

```
,194,9Ø
479Ø DATA 38,246,57,Ø,255,Ø,Ø,Ø
48ØØ DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,Ø
481Ø DATA Ø,Ø,Ø,Ø,Ø,Ø,Ø,16
482Ø DATA Ø,Ø,Ø,49,141,255,23Ø,2
36
483Ø DATA 164,68,68,167,168,16,1
34,32
484Ø DATA 61,227,168,18,235,168,
16,137
485Ø DATA Ø,237,34,237,36,166,16
8,16
486Ø DATA 72,72,16Ø,164,64,167,1
68,17
487Ø DATA 128,4,64,167,42,76,167
,39
488Ø DATA 111,38,236,4Ø,237,43,2
38,62
489Ø DATA 57,141,2ØØ,166,168,17,
23,Ø
49ØØ DATA 93,231,47,166,184,2,61
,134
491Ø DATA 4,237,45,1Ø4,46,1Ø5,38
,1Ø4
492Ø DATA 46,1Ø5,38,1Ø6,45,1Ø6,4
3,38
493Ø DATA 34,174,34,48,136,32,17
5,34
494Ø DATA 175,36,23Ø,132,166,47,
61,231
495Ø DATA 46,236,39,237,42,1Ø6,4
4,38
496Ø DATA 1Ø,166,45,141,41,166,3
8,61
497Ø DATA 231,196,57,1Ø9,45,38,1
Ø,23Ø
498Ø DATA 38,231,192,111,38,134,
4,167
499Ø DATA 45,1Ø6,42,38,19Ø,174,3
6,48
5ØØØ DATA 1,166,132,175,36,167,4
6,134
5Ø1Ø DATA 4,167,42,22,255,173,48
,141
5Ø2Ø DATA Ø,3,23Ø,134,57,1,4,16
5Ø3Ø DATA 64,23,255,87,166,168,1
7,167
5Ø4Ø DATA 39,166,4Ø,132,3,171,16
8,17
5Ø5Ø DATA 167,168,21,166,192,198
,4,237
5Ø6Ø DATA 46,1Ø4,46,1Ø5,38,1Ø4,4
6,1Ø5
5Ø7Ø DATA 38,1Ø6,47,1Ø6,42,1Ø6,4
3,38
5Ø8Ø DATA 7,166,168,21,167,45,32
,32
5Ø9Ø DATA 1Ø9,42,38,22,23Ø,39,2Ø
3,4
51ØØ DATA 231,45,141,61,111,39,1
11,38
511Ø DATA 174,36,48,1,175,36,134
,4
512Ø DATA 167,42,1Ø9,47,38,2Ø3,3
2,195
513Ø DATA 166,42,141,162,166,38,
61,231
514Ø DATA 38,141,3Ø,111,38,174,3
4,48
515Ø DATA 136,32,175,34,175,36,2
3Ø,4Ø
516Ø DATA 134,4,16Ø,168,17,237,4
2,166
517Ø DATA 168,17,167,39,1Ø6,44,3
8,21Ø
518Ø DATA 57,48,141,Ø,28,23Ø,45,
166
519Ø DATA 38,165,184,4,164,133,1
67,168
52ØØ DATA 2Ø,166,184,4,99,133,16
4,133
521Ø DATA 17Ø,168,2Ø,167,184,4,9
9,133
522Ø DATA 57,255,192,24Ø,252,255
,63,15
523Ø DATA 3,141,1Ø,57,18,127,47,
75
524Ø DATA 141,3,22,247,92,142,16
,Ø
525Ø DATA 2Ø4,119,22Ø,237,129,14
Ø,2Ø,192
526Ø DATA 37,249,2Ø4,17Ø,17Ø,237
,129,14Ø
527Ø DATA 37,96,37,249,2Ø4,85,85
,237
528Ø DATA 129,14Ø,4Ø,Ø,37,249,23
,25Ø
529Ø DATA 162,57,Ø,255,Ø,255,Ø,2
55
```


CHECKING ACCOUNT INFORMATION SYSTEM

Let your CoCo ease the task of managing your checking accounts with CAIS. Record deposits, checks, ATM transactions, interest, service charges and other debit/credit transactions. Reconcile and balance your accounts in minutes. Search and edit capabilities.

Requires 32K and 1 disk drive (min). Printer optional.

To order, send check or MO for 24.95 plus 2.50 S/H to:
(SC res. add 5% sales tax)

After Five Software
P.O. Box 210975
Columbia, S.C. 29221-0975

(Reviewed in RAINBOW April '86 issue, pg. 185)

RAINBOW CERTIFICATION SEAL

MORETON BAY SOFTWARE

MORE GOOD SOFTWARE

GRAPHICOM
3 disk package $29.95
64K EXB disk

SAM DIAMOND
graphic adventure $29.95
32K EXB disk

HOT SLOT
casino simulation $24 95
32K EXB disk or tape

ECLIPSE
excellent pixel editor .. $19.95
64K EXB disk

GOOD SOFTWARE

THE MOTION PICTURE
Animation tool $39.95
64K Disk Only

FANTASY CLIP ART
Cocomax or Graphicom ...$14.95
64 K Disk

BJORK BLOCKS
Graphics with Animation ..$34 95
32K EXB Tape

FILE CABINET
Data Base for tape $29 9
16K EXB Tape

COCO WRITER TWO
Tape Version $34.9
16K EXB Tape
Disk Version $44 9
32K Disk

Business Software Call Us

A SUPER COLOR PRINTER
The OKIMATE 20
AT A SUPER LITTLE PRICE!

Prints ten characters to the inch, twelve characters fifteen characters to the inch. *Italics. Italics. Italics.*

Underline Superscript Subscript

Small. Light weight. Quiet. Prints up to 80 characters per second. Prints four color graphics. Includes disk software for black and white, two color and four color screen dumps of Color Computer hi res graphics.

Okimate 20, Plug 'n' Print, paper, black and color ribbon, instructions, software and cable for:

Parallel $220.00
$10.00 Shipping

Mission Santa Barbara founded 1786

The only color Okimate 20 Screen Dump Now Available for the CoCo.

DOUBLE DRIVER I

The BEST monitor driver available Color composite, monochrome and audio output For original CoCo D, E and F boards $24 95

MONO II

Mono II for Color Computer 2. An excellent monochrome monitor driver that has audio output also. Specify model needed.

$24 95

DOUBLE DRIVER II

Finally a monitor driver for the Color Computer II that lets you use a monochrome and a color monitor simultaneously We're proud of this new driver. The six transister circuit provides optimal signal mixing and signal gain Excellent monochrome output and better quality resolution in the color ouput than any driver we have seen. Audio output also. Fits all models of the Color Computer II. $29 95.

64K UPGRADES

E Board (solderless - pictured) $39 95
F Board $26 95
CoCo 2 (except 26-3134A&B and 26-3136A&B) $26.95
CoCo 2 (models 26-3134A&B and 26-3136A&B $39 95

Guaranteed Pretested

Having trouble with your CoCo? We have the chips you need. Call us (805) 962-3127

THE COCO-SWITCHER

A QUALITY PIECE OF HARDWARE

The CoCo Switcher allows you to hook u three peripherals to your RS-232 jack. Co nect your modem, printer and any othe RS-232 compatible peripheral to the CoC Switcher. An LED on the CoCo Switche shows if your computer is on or off at a glance The LED flickers when transmitting or receiv ing data

$39 95 plus $2.00 shipping and handling

SELECTED REPLACEMENT CHIPS FOR THE COCO

The "COCO CORRECTION"
Chips for U11 and U29

Presoldered assembly for E boards upgrades.	$12.95
SN74LS785N (The SAM chip)	$28.95
6809E (Microprocessor)	$19.95
6822P (PIA)	$13.95
6821P (PIA)	$ 8.95
1372 (Color Mixing Chip)	$10 95
Extended basic (EXCEPT models 26-3127B, 26-3134A/B and 26-3136A/B	$29.29

MORETON BAY SOFTWARE

A Division of Moreton Bay laboratory
316 CASTILLO STREET
SANTA BARBARA
CALIFORNIA 93101
(805) 962-3127

VISA

MasterCard

Ordering information

Send $2 00 shipping and handling per order. We ship within 1 working day on receipt of order Blue Labe Service available California residents add 6% sales tax

Use this program to design Escher-type graphics

Esch-A-Sketch

By Eric White

"No one can draw a line that is not a boundary line; every line splits a singularity into a plurality. Every closed contour, no matter what its shape, whether a perfect circle or an irregular random form, evokes in addition the notions of 'inside' and 'outside' and the suggestion of 'near' and 'far away', of 'object' and 'background'."

M.C. Escher

I have always been a great fan of M.C. Escher and his self-perpetuating patterns. Escher had the unique ability to blend shape and form with perfect balance. From his drawings, one feels a sense of complete unity and purpose of form.

In a search for techniques to create Escher-type designs I tried many standard graphic techniques such as tracing paper and pencil, but had little success. When drawing a self-perpetuating pattern, each line creates both an "inside" and "outside" border simultaneously. This can get quite frustrating as you try to keep the subject recognizable. Needless to say this technique was time consuming and tedious.

The main challenge is to draw both sides of the subject at the same time. The computer is the perfect medium to attempt to solve this problem. Listing 1 is a short version of *Escher.bas* and accepts X-Pad, Joystick or Hi-Res pak for input. Type in the program and save it before trying to use it.

You need to edit Line 440 with the appropriate device number. This value is stored in the variable DV. For the X-Pad use a value of 1 (this is the default). If you want to use a Hi-Res pak, use a value of 2. Those using the standard joystick port input need to set DV equal to 3. Edit in the appropriate value before running the program in Listing 1.

Listing 2 is a DMP-200 graphics print program for use with pictures created with *Escher.bas*. This program prints a full 8-by-10.5 inch swatch of your patterns.

I have learned a lot in experimenting with Escher's world. I can't help but wonder what he would have done next if he had the use of todays microcomputers to continue his work. □

ESCHER KEYBOARD INPUTS

C	clear screen to white	destroys picture buf.
W	white pen color	changes pen color
B	black pen color	changes pen color
1-3	pen size	1x1, 2x2, 3x3 square
M	mirror effect on/off	mirrors pen position
S	save Hi-Res picture	saves to tape/disk
X	X-Pad input device	change drawing device
J	joystick input device	change drawing device
P	Hi-Res pak input dev.	change drawing device
" "	update whole picture	press spacebar

```
180 ......113
360 ... .. 91
END ..... 78
```

Listing 1: ESCHER

```
1Ø ON DV GOTO 3Ø,4Ø,5Ø
2Ø GOTO43Ø' & SET UP VARIBLES
3Ø X=PEEK(65376):Y=PEEK(65377):S
=PEEK(65378):GOTO 6Ø ' X PAD
4Ø Y=PEEK(65433)/1.15:X=PEEK(654
34):S=PEEK(65424)+3:GOTO6Ø'HIRES
5Ø X=JOYSTK(Ø):Y=JOYSTK(1):S=(PE
EK(6528Ø)AND1)+3      ' JOYSTICK
6Ø PUT(X,Y)-(X+K,Y+K),C,NOT
7Ø IF S=3 THEN 9Ø ELSE PUT(X,Y)-
(X+K,Y+K),C,NOT
8Ø A$=INKEY$:IF A$<>"" THEN 18Ø
ELSE 1Ø
9Ø COLORC:LINE(X,Y)-(X+K,Y+K),PS
ET,BF
1ØØ XR=INT(X/((R+1)*2))*((R+1)*2
)
11Ø X=X-XR
12Ø IF M THEN LINE(R-X+XR+R+1,Y)
-(R-X+XR+K+R+1,Y+K),PSET,BF
13Ø Y=Y-INT(Y/((R+1)*2))*((R+1)*
2)
14Ø IF Y>R THEN Y=Y-R-1:X=X-R-1:
IF X<Ø THEN X=(R+1)*2+X
15Ø COLORC:LINE(X+W,Y+W)-(X+K+W,
Y+K+W),PSET,BF
16Ø IF M THEN LINE(R+(R-X)+W+1,Y
+W)-(R+(R-X)+K+W+1,Y+K+W),PSET,B
F
17Ø GOTO 1Ø
18Ø IF A$="C" THEN 4ØØ' CLEARPIC
19Ø IF A$="W" THEN C=1' WHITE
2ØØ IF A$="B" THEN C=Ø' BLACK
21Ø IF A$="1" THEN K=Ø' PENSIZE1
22Ø IF A$="2" THEN K=1' PENSIZE2
23Ø IF A$="3" THEN K=2' PENSIZE3
24Ø IF A$="X" THEN DV=1'X-PAD
25Ø IF A$="P" THEN DV=2'HIRESPAK
26Ø IF A$="J" THEN DV=3'JOYSTICK
27Ø IF A$="M" THEN IF M THEN M=Ø
 ELSE M=1' MIRROR ON/OFF
28Ø IF A$="S" THEN CLS:PRINT"NAM
E TO SAVE AS (......../"ET$")":P
RINT@16,"(";:LINEINPUT A$:PRINT@
17,A$:PRINT@25,"/"ET$")":IF A$="
" THEN45Ø ELSE IF PEEK(188)=6 TH
EN CSAVEM LEFT$(A$,8),&H6ØØ,&H1D
FF,R+1 ELSE SAVEM LEFT$(A$,8)+"/
"+ET$,&HEØØ,&H25FF,R+1:GO
```

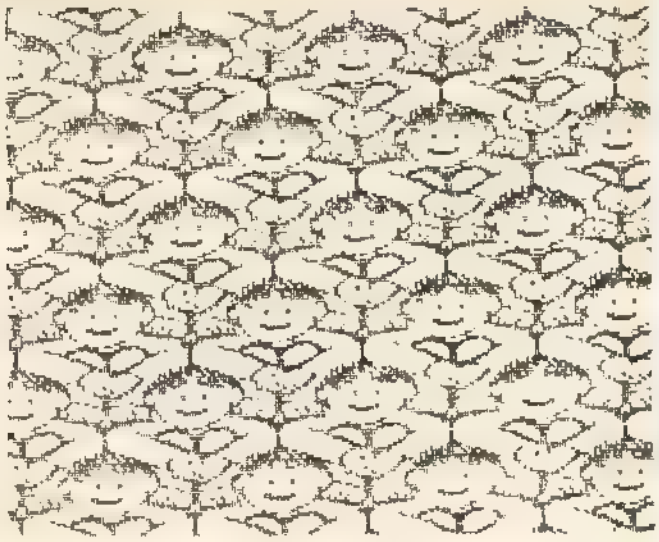

```
29Ø IF A$<>" " THEN 1Ø'UPDATE PI
CTURE
3ØØ SCREEN1,Ø':POKE65495,Ø'SPEED
 POKE
31Ø GET(W,W)-(R+W,R+W),A
32Ø GET(W+R+1,W)-(W+R+R+1,R+W),B
33Ø F=Ø
34Ø FOR X=Ø TO 255 STEP R+1
35Ø FOR Y=Ø TO 191 STEP R+1
36Ø IF F THEN PUT(X,Y)-(X+R,Y+R)
,B,PSET:F=Ø ELSE PUT(X,Y)-(X+R,Y
+R),A,PSET:F=1
37Ø NEXTY:IF F=Ø THEN F=1 ELSE F
=Ø
38Ø NEXTX':POKE65494,Ø'SLOW POKE
39Ø SCREEN1,1:GOTO1Ø
4ØØ CLS:INPUT"ARE YOU SURE YOU W
ANT TO CLEAR  THE SCREEN (Y/N)";
A$
41Ø IF A$<>"Y" THEN SCREEN1,1:GO
TO1Ø
42Ø PCLS1:COLORØ:SCREEN1,1:GOTO4
5Ø
```

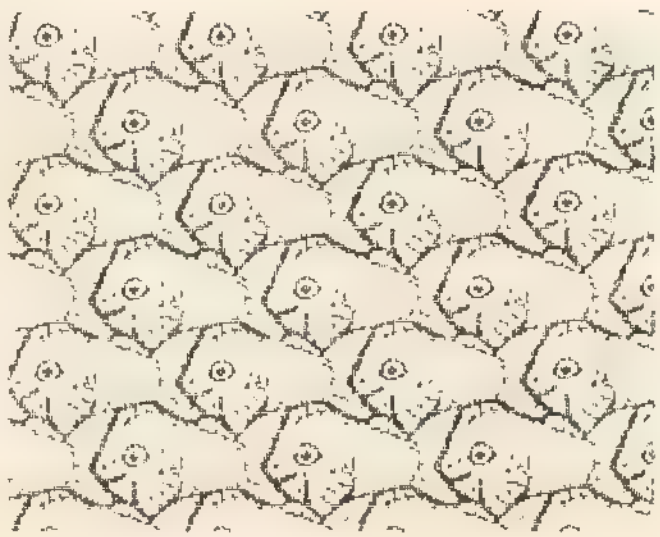

```
43Ø W=32:R=W-1:W=W*3:ET$="ESH"
44Ø DIM A(R),B(R),C(9):K=1:DV=1
45Ø PMODE4:SCREEN1,1:GOTO1Ø
46Ø ' ************************
47Ø ' *  A STUDY OF REGULAR   *
48Ø ' * DIVISION OF THE PLANE *
49Ø ' ************************
5ØØ ' *   COPYRIGHT 1986 BY   *
51Ø ' *     ERIC M. WHITE     *
52Ø ' *  ALL RIGHTS RESERVED  *
53Ø ' ************************
54Ø ' * VERSION: 1.Ø  86Ø4.2Ø *
55Ø ' ************************
```



Listing 2: PRINT200

```
1Ø CLEAR4ØØØ:ET$="ESH":DIM PR$(6
4)
2Ø GN$=CHR$(18)' GRAPHICS ON
3Ø GF$=CHR$(3Ø)' GRAPHICS OFF
4Ø CLS:PRINT"NAME TO LOAD IS (..
......./"ET$")"
5Ø PRINT@16,"(";:LINEINPUT A$:PR
INT@17,A$
6Ø PRINT@25,"/"ET$")":IF A$="" T
HEN RUN ELSE IF PEEK(188)=6 THEN
 CLOADM LEFT$(A$,8) ELSE LOADM L
EFT$(A$,8)+"/"+ET$
7Ø PMODE4:SCREEN1,1
8Ø PRINT#-2,CHR$(27)CHR$(23)' CO
MPRESS ON
9Ø FORY1=1 TO 63 STEP7
1ØØ FORX1=Ø TO 63
11Ø FORY2=Ø TO 6
12Ø IF PPOINT(X1,Y1+Y2)=Ø THEN N
B=NB+INT(2^Y2)
13Ø NEXT Y2
14Ø PR$(Y1)=PR$(Y1)+CHR$(NB+128)
:NB=Ø
15Ø NEXT X1:PRINT#-2,GN$;
16Ø FORL=1TO9:PRINT#-2,PR$(Y1);:
NEXT
17Ø PRINT#-2:NEXT Y1
18Ø FOR X=Ø TO 1Ø
19Ø FOR Y1=1 TO 63 STEP 7
2ØØ FOR L=1TO9:PRINT#-2,PR$(Y1);
:NEXTL
21Ø PRINT#-2:NEXT Y1,X
22Ø PRINT#-2,GF$CHR$(12);:RUN
5ØØ ' ************************
51Ø ' * ESCHER DMP-2ØØ GRAPHIC *
52Ø ' * PATTERN PRINTOUT PROG. *
53Ø ' ************************
54Ø ' *    COPYRIGHT 1986 BY   *
55Ø ' *      ERIC M. WHITE     *
56Ø ' *  ALL RIGHTS RESERVED   *
57Ø ' ************************
58Ø ' * VERSION: 1.Ø   86Ø4.26 *
59Ø ' ************************
```

SPECTROGRAM
MAGAZINE FOR COLOR COMPUTER USERS

* Programs for business, home management, self-improvement, games, utilities
* Reviews of Color Computer products
* Tutorials on programming in Assembly, C, Pascal, and Basic
* Contests

GROUP RATES: $15 with orders of 5 or more subscriptions!

SPECIAL OFFER

As an introductory offer, you can order the first year of SPECTROGRAM Magazine at 40% off the cover price. For $18, you will receive 12 issues of the magazine that could become the most informative addition to your Color Computer system.

We want to establish a line of two-way communication between our staff and our readers as an aid in serving your needs. Please enclose any comments or special requests with your subscription form.

PLEASE SEND ME 12 ISSUES OF SPECTROGRAM MAGAZINE FOR $18 (40% OFF THE COVER PRICE).

Name: _____

Address: _____

City: _____

State: _____ Zip: _____

( ) Check enclosed ( ) Visa ( ) Mastercard

Card # _____ Exp. Date _____

Mail to: SPECTROGRAM Magazine
P.O. Box 138
Rockford, IL 61105
(815) 968-9600

Orders
800-628-2828
Ext. 850

Information
301-521-4886

The Handicappers!

The Pros

Tired of wrestling with Sunday point spreads? Let your Color Computer do it for you! Pigskin Predictions, the best-selling NFL handicapper, is ready for 1985. Spend a few minutes typing in scores each week, and here's what it will do.

- Menu-driven selection of schedules, ratings, division races, predictions or results by team or week. Seven different reports available
- Easy once-a-week entry of scores–no complex, meaningless stats
- Predicts scores of all games for remainder of season each week!
- Calculates projected won-lost records for all weeks
- Maintains home field advantage and power ratings for all teams.
- 1985 schedule data file included free
- 32/64K enhanced version features dazzling Rainbow Writer Screen display. Seeing is believing! Standard 16K version included, too.
- You'll be amazed at the power of this program. 16/32K ECB required (32K for disk). Only $39.95 on tape or disk. 1985 Data tape or disk for previous owners, just $13.95

College

After two years of searching, we've finally found a college football handicapper! We think it's a winner! The Lockmaster® maintains stats on 105 major college teams, analyzes the local point-spread, and rates the game as a betting proposition. Why waste your efforts on games with marginal chances of success, when you can get your Color Computer to pick the games that are most likely to make you a winner?

To use the program, all you need are the College Football ratings that appear each week in USA Today. You can run individual games (including bowl games), update team stats and customize each game's rating with critical information such as coaching and quarterback changes and injuries to key players.

Using the weekly stats and our mathematical formula (which includes schedule difficulty, power ratings, offense and defense), The Lockmaster rates each game against the current point spread and tells you how sure the bet is.

The Lockmaster is easy to use and menu driven. It includes complete instructions and data file for 105 major college teams. 32K/64K Disk only. Just $39.95.

Thoroughbred, Harness, Greyhound

Use your **Color Computer** to improve your performance at the track! These 16K programs for **Thoroughbred, Harness** and **Greyhound** racing rank the horses or dogs in each race quickly and easily, even if you've never handicapped before. All the information you need is readily available from the Racing form, harness or dog track program. We even provide diagrams showing you where to find each item!

Thoroughbred factors include speed, distance, past performance, weight, class, jockey's record, beaten favorite and post position. **Harness factors** include speed, post position, driver's record, breaking tendencies, class, parked-out signs and beaten favorite. **Greyhound factors** include speed, past performance, maneuvering ability, favorite box, class, kennel record, beaten favorite and breaking ability.

We include complete instructions and a wagering guide that tells you which races to bet and hwich to avoid—one of the real secrets of good handicapping. You can buy a more expensive handicapper, but we don't think you can buy a better one! **Thoroughbred, Harness** or **Greyhound Handicapper,** $39.95 each on tape or disk. Any two for $59.95 or all three for $74.95

VISA

Federal Hill Software 8134 Scotts Level Rd. Baltimore, Md. 21208

MasterCard

Fun and Foolery

ARCADE | 16K ECB

Mastering the Gates

By Keiran Kenny

This short game called *Gates* is not intended for sizzling zappers of cosmic creeps, but for those who lack the speed and dexterity needed to qualify as the fastest laser in the western galaxy.

The screen shows five equally spaced fences. You are the yellow spot at the bottom center of the screen and must pass through the gates in all five fences in order to reach home. The gates open and close at random and you never know when a gate will open, or stay open long enough to pass through.

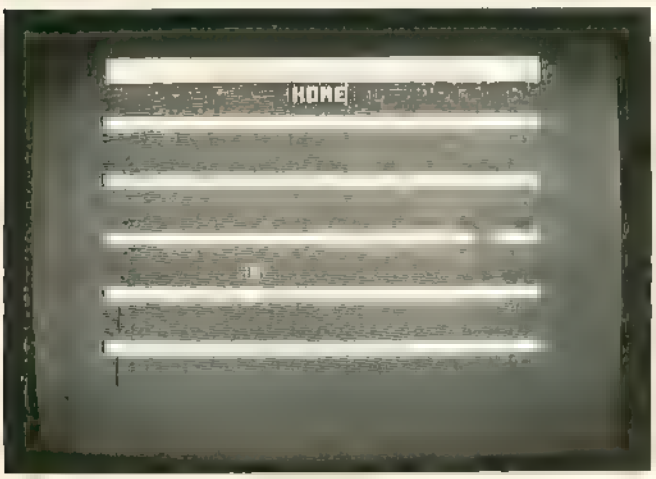

When a gate opens in a fence, press the left- or right-arrow key to move in the required direction, then press the up-arrow key before the gate disappears and you will pass through and gain 20 points. If the gate slams shut, you bounce back and lose 10 points. *Gates* begins with an initial bonus score of 500, which should be enough to keep the score at a positive value.

The listing: GATES

```
Ø 'GATES: BY KEIRAN KENNY, 1985
1Ø CLSØ:X=RND(-TIMER):OK=5ØØ
2Ø PRINT@Ø,"************GATES**
**********";
3Ø FORX=ØTO63:SET(X,5,8):SET(X,1
Ø,8):SET(X,15,8):SET(X,2Ø,8):SET
(X,25,8):NEXT
4Ø PRINT@46,"home";
5Ø H=32:V=28
6Ø P=RND(6Ø):IFP/2=INT(P/2)THEN6
Ø
7Ø N=RND(5):L=N*5:K$=INKEY$
8Ø F=25+RND(55):TIMER=Ø
9Ø RESET(P,L):RESET(P+1,L):RESET
(P+2,L)
1ØØ SET(H,V,2)
11Ø IFL=V-3THENK$=INKEY$ELSEGOTO
28Ø
12Ø IFP+1>H THENS=2:GOTO17Ø
```

```
13Ø IFP+1<H THENS=-2:GOTO15Ø
14Ø IFP+1=H THEN19Ø
15Ø IFK$<>CHR$(8)THEN11Ø
16Ø IFK$=CHR$(8)THENFORX=H TO P+
1STEPS:SET(X,V,2):RESET(X+2,V):G
OSUB29Ø:H=X:NEXT:RESET(H+2,V):GO
TO28Ø
17Ø IFK$<>CHR$(9)THEN11Ø
18Ø IFK$=CHR$(9)THENFORX=H TO P+
1STEPS:SET(X,V,2):RESET(X-2,V):G
OSUB29Ø:H=X:NEXT:RESET(H-2,V):GO
TO28Ø
19Ø IFK$<>CHR$(94)THEN11Ø
2ØØ IFK$=CHR$(94)THENFORX=L+3 TO
 L-2STEP-1:SET(H,X,2):RESET(H,X+
1):GOSUB29Ø:IFPOINT(H,X-1)=8THEN
RESET(H,X):RESET(H,X+1):V=X+2:SE
T(H,V,2):SOUND128,1:Z=Z+1Ø:B$="
(DOWN 1Ø)":GOTO22ØELSEV=X:NEXT:O
K=OK+2Ø:B$=" (UP 2Ø)":IFV>5THEN2
2Ø
21Ø IFV<5THENPRINT@46,CHR$(128)+
CHR$(128)+CHR$(128)+CHR$(128);:P
RINT@Ø,CHR$(31)"HOME! SCORE ="OK
-Z;:GOTO23ØELSE28Ø
22Ø PRINT@Ø,CHR$(31):PRINT@7,"SC
ORE"+B$+" ="OK-Z:GOTO28Ø
23Ø PRINT": ANOTHER? Y/N";
24Ø K$=INKEY$:IFK$=""THEN24Ø
25Ø IFK$="Y"THENCLS:Z=Ø:GOTO1Ø
26Ø IFK$="N"THENCLS:END
27Ø GOTO24Ø
28Ø GOSUB29Ø:IFPOINT(P+1,L)=8 TH
EN6ØELSE11Ø
29Ø IFTIMER>F THENSET(P,L,8):SET
(P+1,L,8):SET(P+2,L,8):RETURNELS
ERETURN
```

SIMULATION | **16K ECB**

Laying Down the Chips

By Bill Bernico

At one time or another, most everyone has played bingo. It's one person's job to pick the little bingo chips from a revolving drum and call out the numbers. In the professional version, a plexiglass tank with 75 blowing ping pong balls is used. One ball at a time randomly pops up to the top as the next bingo number to be called. The following program, *Automatic Bingo Caller*, simulates this machine. It's not a bingo game but it randomly calls all of the 75 bingo numbers one at a time without duplication.

Upon running the program two lines are displayed at the top of the screen. The first line displays the numbers already called. The second line tells you how many numbers have not been called. Pressing 'C' picks the next number; 'B' and the game pauses so a player's card may be checked for a correct bingo; and 'N' starts a new game. If it turns out that a player did not have a bingo, pressing 'R' resumes that particular game. That's all there is to it!

The listing: BINGO

```
1Ø 'ABC-AUTOMATIC BINGO CALLER
2Ø 'BY BILL BERNICO
3Ø '7Ø8 MICHIGAN AVE.
4Ø 'SHEBOYGAN, WI 53Ø81
5Ø '(414) 459-735Ø
6Ø '
7Ø DIM B(15),C(5,15)
8Ø DATA 1,2,3,4,5,6,7,8,9,1Ø,11,
12,13,14,15
9Ø FOR X=1 TO 15:READ B(X):NEXT
X
1ØØ Y=96:CLS:FOR F=1 TO 5:FOR V=
1 TO 15
11Ø C(F,V)=(F-1)*15+V
12Ø NEXT V:NEXT F
13Ø FOR X=1 TO 75
14Ø F=RND(5):V=RND(15)
15Ø IF C(F,V)=Ø THEN 14Ø
16Ø C(F,V)=Ø
17Ø PRINT@Ø,"NUMBERS CALLED ="X
18Ø PRINT@32,"NUMBERS LEFT   ="7
5-X
19Ø PRINT@64,STRING$(32,131);
2ØØ IF F=1 THEN PRINT@Y,"b"B(V);
21Ø IF F=2 THEN PRINT@Y,"i"B(V)+
15;
22Ø IF F=3 THEN PRINT@Y,"n"B(V)+
3Ø;
23Ø IF F=4 THEN PRINT@Y,"g"B(V)+
45;
24Ø IF F=5 THEN PRINT@Y,"o"B(V)+
6Ø;
25Ø IF X=75 THEN 31Ø
26Ø Y=Y+4:PLAY"L25O5V5C"
27Ø I$=INKEY$:IF I$=""THEN 27Ø
28Ø IF I$="C"THEN NEXT X
29Ø IF I$="B"THEN 31Ø
3ØØ GOTO 27Ø
31Ø FOR F=1 TO 3
32Ø PRINT@25,"BINGO":EXEC 43345
33Ø FOR D=1 TO 15Ø:NEXT D
34Ø PRINT@25,"bingo":EXEC 43345
35Ø FOR D=1 TO 15Ø:NEXT D:NEXT F
36Ø PRINT@483,"rESUME THIS GAME
  nEW GAME";
37Ø I$=INKEY$:IF I$=""THEN 37Ø
38Ø IF I$="R"AND X=75 THEN RUN
39Ø IF I$="R"AND X<75 THEN PRINT
@483,STRING$(27,143);:GOTO 28Ø
4ØØ IF I$="N"THEN RUN
41Ø GOTO 37Ø
```

SIMULATION | 16K ECB

Fly Off the Handle

By Archor Wright

The following program, *Simple Flight Simulator* demonstrates the basics of flight. It takes a while to be able to totally control the jet. The vertical movement of the right joystick controls the right half of the horizon and horizontal movement controls the left half of the horizon.

You can practice forever because the CoCo jet never runs out of fuel!

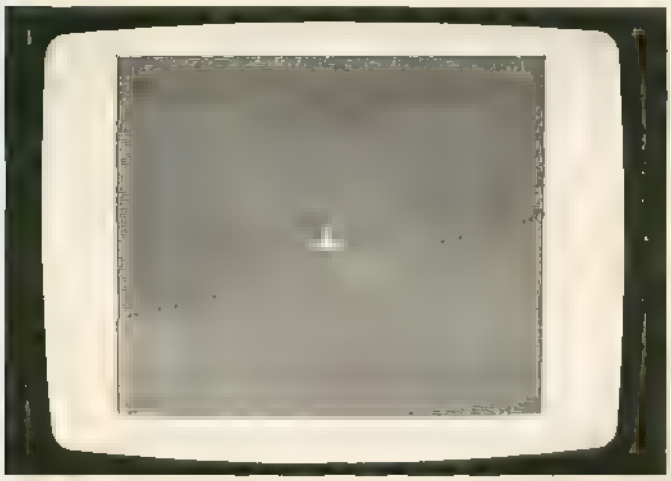

The listing: FLIGHT

```
Ø POKE65495,Ø:CLS:PRINT@1,"sIMPL
E fLIGHT sIMULATOR";:PRINT@64,"C
REATED BY: ARCHOR WRIGHT";:PLAY"
P1":PMODE4,1:POKE179,1:PCLS:SCRE
EN1,1
1 H=JOYSTK(Ø):V=JOYSTK(1)
2 IFH<2ØTHENA=A+1
3 IFV<2ØTHENB=B-1
4 IFH>4ØTHENA=A-1
5 IFV>4ØTHENB=B+1
6 IFA<ØTHENA=A+1
7 IFB<ØTHENB=B+1
8 IFA>191THENA=A-1
9 IFB>191THENB=B-1
1Ø POKE178,1:LINE(Ø,1+A)-(255,1+
B),PSET:POKE178,2:LINE(Ø,A)-(255
,B),PSET:DRAW"BM128,96C1R9L18UR1
8L18R9U6RD6L2U6D6LU3D3R4U3":GOTO
1
```

AWARENESS | 16K ECB

Calling to Mind

By David Huang

Repeat It is a game that requires a good memory. Four squares, along with the title and score, appear on the screen. Press any key to start the game and a square lights up with a short "beep." You must then press the number (1-4) corresponding to that square. If the computer's sequence is repeated correctly, the score increments by one and another square is added to the sequence. The sequence will be replayed by pressing the 'R' key. If a key is pressed that does not correspond to the square in sequence, the game ends.

The object of the game is to repeat as many sequences as possible to obtain a high score. Exceeding a score of 10 without replaying any sequence indicates great memorization.

Enjoy!

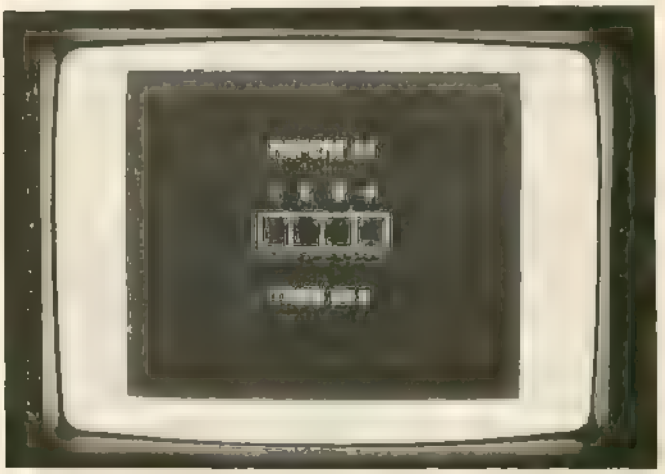

The listing: REPEATIT

```
1Ø DIMP(1ØØ),BE(5Ø):Z=1
2Ø PMODE4,1:PCLS:SCREEN1,1
3Ø FORI=ØTO9:READN$(I):NEXTI
4Ø DATA U5R4D5L4,BR2R2LU5G,NR5E4
HL2G,R5U3NL3U2L5,BR3U5G3R4,R4EUH
L3U2R4,R5U2L4ND2U3R4,BR4U3EUL4D,
R5U5L5D2NR4D3,R5U5L5D2R4
5Ø DRAW"BM96,4Ø;ND7R4FDGNL4FFD2B
R3BU7NR5D3NR4D4R5BR3BU7ND7R4FD2G
L4BD3BR8BU7NR5D3NR4D4R5BR3BU7BDD
6U4NR5U2ER3FD6BR3BU7R4L2D7BR1ØBU
7R4L2D7L2R4BR4BU7R4L2D7"
6Ø DRAW"BM96,13Ø;BR3U6NL2R2BR2R3
LD6NLRBR3U6F2E2D6BR3U6NR3D3NR3D3
R3BR3R3U3L3U3R3BR3D2BD2D2"
7Ø X=135:FORI=1TO3:DRAW"BM"+STR$
(X)+",13Ø;"+N$(Ø):X=X+8:NEXTI
```

```
8Ø DRAW"BM88,8Ø;D2ØR2ØU2ØNL2ØR2Ø
D2ØNL2ØR2ØU2ØNL2ØR2ØD2ØL2Ø"
9Ø X=95:FORI=1TO4:DRAW"BM"+STR$(
X)+",7Ø;"+N$(I):X=X+2Ø:NEXTI
1ØØ A$=INKEY$:IFA$=""THEN1ØØ
11Ø C=RND(4)
12Ø P(Z)=C:FORT=1TOZ:PAINT(69+(P
(T)*2Ø),85),,5:SOUND1,1Ø:PUT(69+
(P(T)*2Ø),81)-(69+(P(T)*2Ø+18),9
9),BE,PSET:NEXTT:B=1
13Ø A$=INKEY$:IFA$=""THEN13Ø
14Ø SOUND255,1
15Ø IF A$="R" THEN 12Ø
16Ø IF VAL(A$)=P(B) THEN17Ø ELSE
19Ø
17Ø B=B+1:IF B>Z THEN18ØELSE13Ø
18Ø TI$=STR$(Z):X=151:FORS=1TO3:
J$=LEFT$(RIGHT$(TI$,S),1):PUT(X,
122)-(X+5,13Ø),BE,PSET:DRAW"BM"+
STR$(X)+",13Ø;"+N$(VAL(J$)):X=X-
8:NEXTS:Z=Z+1:GOTO11Ø
19Ø FORI=1TO1Ø:SOUND1,1:NEXTI:DR
AW"BM97,15Ø;U6R4D2BD2NLD2NL4BR3U
6R4D3NL3D3BR3U6F2NDE2D6BR3NR4U3N
R3U3R4BR8ND6R4D6NL4BR3BU6D4F2E2U
4BR3BD6NR4U3NR3U3R4BR3BD6U6R4D3L
4R2F2D"
2ØØ GOTO 2ØØ
```

PROGRAMMING UTILITY	16K ECB MOD.	32K ECB

Break Key Disable

By Eric Harrison

The following program should be particularly useful in games and educational programs written for small children. It first disables the BREAK key, then places a machine language keyboard routine in memory. To call the program use a GOSUB 50000 and then copy the variable ZZ$ to whatever variable you want to use. This can be done with a simple assignment statement. To allow entry of a numeric variable, use VAL(ZZ$) and assign this to the appropriate variable.

Note that the BREAK key will work until Line 2 is executed. Also, the BREAK key is not disabled while in the direct command entry mode. This is to allow for editing of programs.

As written, the program requires 32K Extended Color BASIC but can be altered to run on a 16K ECB system as follows:

1) In Line 3 change the FOR loop values from &H7F00 to &H3F00 and &H7F0C to &H3F0C.

2) Change the CLEAR statement in Line 1 to CLEAR 600,&H3EFF.

3) In Line 3 change the DEFUSR statement to DEFUSR0=&H3F00.

The lisitng: BREAKDIS

```
1 CLEAR 6ØØ,&H7EFF     ' MEM FROM
 &H7FØØ AND UP FOR M/L
2 READ X$,Y$:IFX$="Ø"THEN3 ELSE
X$="&H"+X$:Y$="&H"+Y$:X=VAL(X$):
Y=VAL(Y$):POKE X,Y:GOTO2:DATA F8
,32,F9,62,FA,1C,FB,AF,FC,7E,FD,A
D,FE,A5,19A,39,19B,Ø,19C,F8,19A,
7E,Ø,Ø  ' NOW THE break KEY IS D
ISABLED SORT OF.
3 FOR X=&H7FØØ TO &H7FØC:READ A$
:V=VAL("&H"+A$):POKEX,V:NEXTX:DE
FUSRØ=&H7FØØ:DATAAD,9F,AØ,ØØ,27,
FA,1F,89,4F,BD,B4,F4,39   ' ADD
M/L KEYREAD FOR PROGRAM AT LINE
5ØØØØ-
9 REM *** THE FOLLOWING (LINES 1
Ø-5Ø) IS A DEMO OF HOW TO USE TH
IS PROGRAM... TRY TO break IT AT
 ANY TIME!!!
1Ø CLS:PRINT "PLEASE ENTER A STR
ING...";
2Ø GOSUB 5ØØØØ
3Ø PRINT:PRINT "THE LINE YOU ENT
ERED IS:";ZZ$
35 PRINT:PRINT:PRINT"PRESS ANY K
EY WHEN READY...":ZZ=USRØ(Ø) ' C
ALL KEYREAD ROUTINE JUST FOR DEL
AY...
4Ø FOR X=1 TO 5ØØ:PRINT X:NEXT
5Ø END
1ØØØØ GOTO 1ØØØØ
5ØØØØ ZZ$=""
5ØØ1Ø PRINT CHR$(128);
5ØØ2Ø WZ=USRØ(Ø)
5ØØ3Ø WZ$=CHR$(WZ)
5ØØ4Ø PRINT CHR$(8);
5ØØ5Ø IFWZ=8 THEN IF LEN(ZZ$)<=Ø
 THEN 5Ø11Ø ELSE ZZ$=LEFT$(ZZ$,L
EN(ZZ$)-1):PRINTCHR$(8);:GOTO5ØØ
1Ø
5ØØ6Ø IF WZ=13 THEN PRINT:RETURN
5ØØ7Ø IF WZ=21 THEN IF LEN(ZZ$)>
1 THEN FOR CC=LEN(ZZ$) TO 1 STEP
 -1:PRINTCHR$(8);:NEXT:GOTO5ØØØØ
5ØØ8Ø IF WZ>31 AND WZ<123 THEN 5
ØØ9Ø ELSE 5ØØ1Ø
5ØØ9Ø IF LEN(ZZ$)=>24Ø THEN SOUN
D 1ØØ,1:IF LEN(ZZ$)>254 THEN SOU
ND 1ØØ,2:GOTO 5ØØ1Ø
5Ø1ØØ ZZ$=ZZ$+WZ$:PRINTWZ$;
5Ø11Ø GOTO 5ØØ1Ø
```

LOGIC | 16K ECB

Masonry Madness

By Andy Blount

Bricks is a Lo-Res puzzle-type game in which you must move a stack of bricks from one side to another. All of the bricks are different sizes and are represented by Xs. Only one brick can be moved at a time and large bricks can't be stacked on smaller ones.

To play the game use the left- and right-arrow keys to move the 'G' and 'P' across the top of the screen. The 'G' represents getting a brick and the 'P' represents placing a brick. To get or place a brick press ENTER and it disappears or appears, if the move is not illegal. The score is tallied by how many moves have been made; the lower the better.

The listing: BRICKS

```
1Ø RP$=STRING$(8," "):FORX=1TO8:
L$=L$+"X":L(X)=X:L$(X)=L$:NEXT:X
$(2)="87654321"
2Ø CLS:PRINT@13,"BRICKS":PRINT@4
1,"BY ANDY BLOUNT":PRINT@74,"SCO
RE: Ø":FORX=ØTO7:A$=MID$(X$(2),X
+1,1):PRINT@459-X*32,L$(VAL(A$))
:NEXT:P=1:P$="g":PRINT@162,P$;:P
L=1
3Ø IN$=INKEY$:IFIN$="" THEN3Ø EL
SEIFIN$=CHR$(9) ANDPL<>3 THENPRI
NT@162+(PL-1)*9," ";:PL=PL+1:PRI
NT@162+(PL-1)*9,P$ ELSEIFIN$=CHR
$(8) ANDPL<>1 THENPRINT@162+(PL-
1)*9," ";:PL=PL-1:PRINT@162+(PL-
1)*9,P$; ELSEIFIN$=CHR$(13) THEN
IFP=2THEN8Ø ELSE5Ø
4Ø GOTO3Ø
5Ø IFLEN(X$(PL))=Ø THEN3Ø
6Ø P=2:P$="p":N$=RIGHT$(X$(PL),1
):M=VAL(N$):M$=L$(M):PRINT@1Ø7,M
$:PR$=LEFT$(X$(PL),1):PRINT@45Ø+
(PL-1)*9-((LEN(X$(PL))-1)*32),RP
$;:MID$(X$(PL),LEN(X$(PL)),1)="
":Y$=X$(PL):X$(PL)=LEFT$(Y$,LEN(
X$(PL))-1)
7Ø PRINT@162+(PL-1)*9,P$:GOTO1ØØ
8Ø IFLEN(X$(PL))=Ø THENX$(PL)=MI
D$(STR$(M),2,1) ELSEN$=RIGHT$(X$
(PL),1):IFM>VAL(N$) THEN1ØØ ELSE
Y$=MID$(STR$(M),2,1):X$(PL)=X$(P
L)+Y$:M$="":M=Ø
9Ø PRINT@1Ø7,RP$:P=1:P$="g":PR$=
RIGHT$(X$(PL),1):PRINT@45Ø+(PL-1
)*9-((LEN(X$(PL))-1)*32),L$(VAL(
PR$));:PRINT@162+(PL-1)*9,P$
1ØØ SC=SC+1:PRINT@8Ø,SC:IFLEN(X$
(1))=8 ORLEN(X$(3))=8 THEN11ØELS
E GOTO3Ø
11Ø PLAY"O4L1ØCDEFGAB":CLS:PRINT
"CONGRADULATIONS, YOU SOLVED THE
 PUZZLE IN";SC;"MOVES.":END
```

PROGRAMMING UTILITY | 16K ECB

Settle a Score

By Tio Babich

Joyscore is a utility designed for use in game programming. It allows players to enter first, second and third place high scores using the right joystick.

The listing: JOYSCORE

```
1Ø CLS3
2Ø PRINT" USE THIS UTILITY IN YO
UR NEXT    GAME. USE A GOSUB 1ØØØ
Ø AND      SET YS EQUAL TO THE VA
RIABLE     HOLDING THE PLAYERS SC
ORE.       DELETE LINES Ø-9999 AN
D 1ØØ1Ø.   FOR A DEMONSTRATION"
31 PRINT"         PRESS A KEY."
32 PRINT"NOTE: THE '&' SIGN ENDS
 INPUT.";
5Ø EXEC 44539
8999 GOSUB1ØØØØ
9ØØØ STOP
1ØØØØ REM** USE YS AS THE PERSO-
NS SCORE AND USE THIS SUBROUTE
   WITH A GOSUB 1ØØØØ ROUTINE.
1ØØØ5 IF YS<HS AND S<MS AND S<LS
 THEN GOTO 1Ø27Ø
1ØØØ6 A=Ø:J=O:I=O
1ØØ1Ø YS=1ØØØ
1ØØ2Ø PLAY"L255"
1ØØ3Ø CLSØ
1ØØ4Ø A$="ABCDEFGHIJKLMNOPQRSTUV
WXYZ . _&"
1ØØ5Ø Y=1Ø
1ØØ6Ø R$=""
1ØØ7Ø Q$=STRING$(32,196)
1ØØ8Ø PRINT"SELECT LETTERS WITH
JOYSTICK."
1ØØ9Ø PRINT
1Ø1ØØ PRINT@128,A$
1Ø11Ø J=JOYSTK(Ø)
1Ø115 IF J>59 THEN J=59
1Ø12Ø K=INT(J/2)
1Ø13Ø SET(J,Y,2):PLAY"V5;ABC;V15
":RESET(J,Y)
1Ø135 IF PEEK(6528Ø)=254 AND K=2
9 THEN GOTO 1Ø21Ø
1Ø14Ø IF PEEK(6528Ø)=254 OR PEEK
(6528Ø)=126 THEN PLAY"ABCDEFG":G
OSUB1Ø16Ø:A=A+1:IF A>11THEN1Ø21Ø
 ELSEPRINT@2Ø4,R$
1Ø15Ø GOTO1Ø11Ø
1Ø16Ø IF K=26 THEN R$=R$+" ":RET
URN
1Ø17Ø IF K=27 THEN R$=R$+".":RET
URN
1Ø18Ø IF K=28 THEN R$=R$+CHR$(8)
:A=A-2:RETURN
1Ø2ØØ R$=R$+CHR$(K+65):RETURN
1Ø21Ø CLS
1Ø22Ø T$="":T$=R$
1Ø23Ø IF YS>HS THEN L$=M$:LS=MS:
M$=H$:MS=HS:HS=YS:H$=T$:GOTO1Ø26
Ø
1Ø24Ø IF YS>MS THEN L$=M$:LS=MS:
MS=YS:M$=T$:GOTO1Ø26Ø
1Ø25Ø IF YS>LS THEN LS=YS:L$=T$
1Ø26Ø CLS
1Ø27Ø PRINTQ$:PRINT"              h
igh scores"
1Ø28Ø PRINTQ$;:PRINT"
IST PLACE":PRINTQ$;
1Ø29Ø PRINTH$,HS:PRINTQ$;
1Ø3ØØ PRINT     "            2ND
PLACE":PRINTQ$;
1Ø31Ø PRINTM$,MS
1Ø32Ø PRINTQ$;:PRINT"
3RD PLACE":PRINTQ$;
1Ø33Ø PRINTL$,LS
1Ø334 FOR T=1 TO 1Ø
1Ø34Ø PLAY"L225;V3;ABC;V6;ABC;V9
;ABC;V12;ABC;V15;ABC;V18;ABC;V21
;ABC;V24;ABC;V27;ABC;V3Ø;ABC;V31
;A;V15;L255"
1Ø345 NEXTT
1Ø35Ø RETURN
```


CANYON COUNTY DEVICES
P.O. BOX C 24hr. Line (805)253-0221
SAUGUS, CA. 91350

SOFT SECTORED
DISKS
DISKS IN PACKAGES OF 10

	PER PACK	3 PACKS
SSDD	$ 7 95	$22 50
DSDD	$ 8 95	$25.50

WITH HUB RINGS, SLEEVES, LABELS,& WRITE PROT TABS
100% ERROR FREE WARRANTY

79¢ ea DSDD IN QUANTITY OF 100

COLORS AVAILABLE. ALSO 3 5 in MICRO DISKS AT SIMILAR SAVINGS CALL OR WRITE FOR PRICES

10% DISCOUNT

SPECIAL THIS MONTH
Order before the end of August and take a 10% DISCOUNT off of order total.

No handling charge on orders of $20 or more.
ADD $1.50 handling on orders of less than $20. COD orders add $1 50 COD charge.
Calif. sales add 6 5% tax.

PRINTER RIBBONS

Catalog#	All Guaranteed Discription	Per Ribbon	Box of 6	$50-$150 per order
101-1090	Brother HR 15/25 (nylon)	$ 6 60	$ 36 15	$ 35 05
101-1410	Centronics 150/152-2/159	$ 6 15	$ 33 65	$ 32 65
101-1505	C.Itoh Prowriter I&II	$ 5 05	$ 27 75	$ 26 85
101-2240	Epson LX80 Spectrum(nylon)	$ 5.95	$ 32 65	$ 31 65
101-2250	Epson MX/FX/RX70/80(nylon)	$ 4 95	$ 27 25	$ 26 40
101-2270	Epson MX/FX/RX 100 (nylon)	$ 6.85	$ 37 60	$ 36 50
101-2900	IBM SelectricII(Correctbl)	$ 1.95	$ 10 90	$ 10 55
101-4315	NEC 5500/7700 Spinwriter	$ 7.40	$ 40 60	$ 39 35
101 4505	Okidata ML80/82/83/92/93	$ 2 15	$ 11 90	$ 11 50
101-4515	Okidata ML84 (nylon)	$ 4.85	$ 26.75	$ 25 90
101-4525	Okidata Microline182/192	$ 8 90	$ 49 00	$ 47 50
101-4970	RadioShack TRS-80 LP VII	$ 7.40	$ 40.60	$ 39 35
101-4970	Gorilla Banana (nylon)	$ 7 40	$ 40 60	$ 39 35
101-5545	Tally/Mannes. Spirit 80	$ 6 95	$ 38 10	$ 36.95

Ribbons for most printers available. Send us your name,address, & discription of printer for Quote & Catalog.
Quantity Discount Prices available in larger quantities. OK to mix ribbons (minimum 1 box per type) for Discounts.
Colors available in some popular types SEND FOR CATALOG

WE'VE OUTDONE OURSELVES!

DS-69A DIGISECTOR™
THE VIDEO DIGITIZER NOBODY CAN BEAT!

NEW

The DS-69A is the best video digitizer available for your COCO at any price. This new, turbocharged version of our original DS-69 Digisector allows your 64K COCO to see clearly into the world of any television picture.

SPEED!	The fastest — 8 images per second!
PRECISION!	The highest — 64 levels of true grey scale!
RESOLUTION!	The finest — 256 × 256 picture elements!
Compatibility	Use with a black and white or color camera, a VCR or tuner.
Compactness	Self contained in a plug in Rompack.
Convenience	Use with a Y-cable, Multi-Pak, PBJ Bus or plug directly into the cartridge slot.
Ease of Use	Software on disk will get you up and running fast!

POWERFUL C-SEE™ SOFTWARE

C-SEE is the menu driven software package included with your DS-69A. Available on disk or cassette, it provides lightning fast 5 level digitizing to the screen, high precision 16 level digitizing for superb hard copy printout and simple keyboard or joystick control of brightness and contrast. Or call our driver routines from your own Basic program for easy 64 level random access digitizing. Pictures taken by the DS—69A may be saved on disk or cassette by C-SEE and then edited with COCO MAX, MAGIGRAPH or GRAPHICOM for special effects. Any of the popular printers may be used to obtain printouts of images digitized by the DS-69A.

ONE YEAR WARRANTY

DS-69A Digisector & C-SEE III Software	**$149.95**
OR your DS-69 &	**$ 59.95**
MAGIGRAPH Graphics Editor on disk	**$ 39.95**

DS-69 DIGISECTOR™
THERE'S ONLY ONE BETTER VIDEO DIGITIZER . . .

And that's the DS-69A. The DS-69 is The Micro Works' original video digitizer, tried and true since 1984. It provides almost all the features of the DS-69A and is now available at a new low price. The DS-69 features;

SLUGGISHNESS	2 images per second. Quick enough to freeze all but the fastest moving pictures.
INCOMPATIBILITY	Brightly colored scenes may be striped when using a color camera.
INCONVENIENCE	Will not work with a Y cable.

Otherwise, it's a DS-69A. Precision, resolution, compactness, ease of use, software and warranty. Except one last thing.

DS-69 Digisector & C-SEE III Software **$ 99.95**

Superb image quality produced by both Digisectors.

Printout

Screen

Screen

NO RISK GUARANTEE

If you are not completely satisfied with the performance of your new DS-69A or DS-69 you may return it, undamaged, within ten days for a full refund of the purchase price. We'll even pay the return shipping. If you can get any of our competitors to give you the same guarantee, buy both and return the one you don't like. We know which one you'll keep.

Purveyors of Fine Video Digitizers Since 1977. THE MICRO WORKS

Terms: Visa, Mastercard, Check or C.O.D.

P.O. Box 1110 Del Mar, CA 92014 (619) 942-2400

RAINBOW

Give us your best: Join the ranks of these courageous CoCoists in showing the Color Computer world your high score at your favorite micro-diversion. We want to put your best effort on record in THE RAINBOW's "Scoreboard" column. All entries must be received 60 days prior to publication. Entries should be printed — legibly — and must include your *full* name, address, game title, company name and, of course, your high score. Each individual is limited to three score entries per month. Send your entries to Scoreboard, c/o THE RAINBOW. The "Rainbow Scoreboard" is now a bimonthly feature.

For greater convenience, your high scores may also be sent to us through the MAIL section of our new Delphi CoCo SIG. From the CoCo SIG> prompt, pick MAIL, then type SEND and address to: EDITORS

★ Current Record Holder • Shutout

ALPINE SLOPES (THE RAINBOW, 12/85)
- 4,254 ★Todd Wirtz, Midland, MI
- 3,851 Michael Wolcheski, Meriden, CT
- 3,478 Rick Busse, Granite City, IL
- 3,298 Neil Edge, Williston, FL
- 3,056 Matthew Nelson, Endwell, NY
- 1,518 Roy Geeo, Hot Springs, AR

AMPHIBIA (THE RAINBOW, 8/85)
- 11,200 ★Daniel Bisbee, Chesterfield, MA
- 6,665 David Salvatore, New Kensington, PA

ANDRONE *(Radio Shack)*
- 58,200 ★Scott Beiman, Bettendorf, IA
- 57,300 Mitch Hart, Seattle, WA
- 54,300 Daphnie Phillips, Evansville, WI
- 53,500 Maurice MacGarvey, Dawson Creek, British Columbia
- 27,950 Mike Tindall, Manitowoc, WI

ASTRO BLAST *(Mark Data)*
- 101,989 ★David Salvatore, New Kensington, PA
- 63,125 Edward Voge, Sr., Pittsburgh, PA
- 53,950 Bill Fritsch, Whitehall, PA

BATS AND BUGS (THE RAINBOW, 7/84)
- 24,600 ★Michael Rosenberg, Prestonburg, KY
- 4,400 Jon Hobson, Plainfield, WI
- 3,050 Jay Lose, Gulfport, MS
- 3,000 Michael Scott, Johnstown, NY
- 2,500 Steven Bullard, Allen, OK

BEAM RIDER *(Spectral Associates)*
- 4,969,060 ★James Oakley, Nashville, TN
- 3,042,470 Evelyn Thompson, Nederland, TX
- 747,200 Robert Ewing, Swift Current, Saskatchewan
- 310,420 Trevor Nagel, Swift Current, Saskatchewan

BLACKBEARD'S ISLAND *(NOVASOFT)*
- 65 ★Jeff Hillson, Blacksburg, VA
- 78 Roy D. Grant, Toledo, OH
- 79 Jeff Roberg, Winfield, KS

BLACK SANCTUM *(Mark Data)*
- 106 ★Jeff Hillson, Blacksburg, VA

BREWMASTER *(NOVASOFT)*
- 451,650 ★Martha St. John, Highland Falls, NY
- 279,800 Alan Drazen, Longwood, FL
- 216,350 Jean-Francois Morin, Loretteville, Quebec
- 166,175 Scott Purrone, Roselle Park, NJ
- 96,875 Chris Cope, Central, SC

BROTAN THE BLUE (THE RAINBOW, 8/85)
- 2,534 ★Robert Obringer, Wayne, NJ

BUBBLE WARS (THE RAINBOW, 2/86)
- 26,900 ★Derek Leidig, Clinton, NY
- 24,400 Daniel Cecil, Bardstown, KY
- 22,600 Brian McGuire, Golden, CO
- 21,100 Vincent Neault, Biddeford, ME
- 14,881 Tandy Carter Jr., Atwater, CA

BUSTOUT *(Radio Shack)*
- 37,900 ★Gordon Rock, Davenport, IA
- 21,850 Charles Egglesfield, Sault Ste Marie, Ontario
- 21,630 Tanya Maestas, Denver, CO
- 21,236 Mike McCafferty, Idaho Falls, ID
- 18,403 Chris Zepka, North Adams, MA

BUZZARD BAIT *(Tom Mix)*
- 4,455,150 ★Paul Rumrill, Gales Ferry, CT
- 3,091,700 Blossom Mayor, East Greenbush, NY
- 1,133,850 Rupert Young, Sheffield, MA
- 980,500 Fruber Malcom, Culpeper, VA
- 847,400 Gordon Rock, Davenport, IA
- 152,450 Marc Gagnon, Cap-de-la-Madeleine, Quebec

CALIXTO ISLAND *(Mark Data)*
- 166 ★Chad Golt, Evangeline, LA

CANDY CO. *(Intracolor)*
- 103,306 ★Kirk Nedrebeg, Liverpool, OH

CANYON CLIMBER *(Radio Shack)*
- 9,988,000 ★Brannon Baxley, Live Oak, FL
- 9,129,100 Gary Mohnsen, Tucson, AZ
- 1,428,600 Chad McClellan, Rushville, IN
- 1,347,800 Lucy Dorego, Leamington, Ontario
- 1,004,000 Brett Pancher, Hookselt, NH

CASHMAN *(MichTron)*
- $45,900 ★Gordon Rock, Davenport, IA
- 31,260 Fred Naumann, Hailey, ID
- 30,050 Keith Miller, Houston, TX
- 27,530 Sally Naumann, Hailey, ID
- 24,920 Edwin Prather, Oxnard, CA

CLOWNS & BALLOONS *(Radio Shack)*
- 352,020 ★Faye Keefer, Augusta, GA
- 60,690 Mary Largent, Madison, MS
- 57,070 Paul Walcott, Mt. Clemens, MI
- 45,460 Joyce Walcott, Mt. Clemens, MI
- 40,610 Stephanie Kosara, Monroe, NY

COLOR BASEBALL *(Radio Shack)*
- 814-1 ★Frank D'Amato, Brooklyn, NY
- 707-0 •Charles Chilis, Trois-Rivieres, Quebec
- 549-0 •Skipper Taday, East Lyme, CT
- 256-4 Ellsworth Summers, Jacksonville, FL
- 243-0 •Steve Mutton, Shrewsbury, MA
- 93-1 Maurice MacGarvey, Dawson Creek, British Columbia

COLOR BLACKJACK (THE RAINBOW, 10/83)
- $15,670 ★Wayne Dewitt, Blue Island, IL
- 7,340 Heron Dewitt, Blue Island, IL

COLOR CAR *(NOVASOFT)*
- 107,864 ★David Entenmann, Monroe, NY

COLOROUT *(Colorful Software)*
- 34,085 ★Tim Rueb, Stevensville, MI

COLORPEDE *(Intracolor)*
- 3,107,194 ★John Ray, Goodlettsville, TN
- 1,066,000 Keith Queen, Marietta, GA
- 1,006,000 Gail Queen, Marietta, GA
- 133,036 Mariano Frausto, Blue Island, IL
- 59,529 Kevin Radwan, Blue Island, IL

COLOR POKER (THE RAINBOW, 4/83)
- 3,241,600 ★Earl LaVesse Foster, Lynchburg, VA

CRYSTLE CASTLES *(ThunderVision)*
- 850,156 ★Michael Brennan, Calgary, Alberta
- 800,060 Dan Mitenko, Calgary, Alberta
- 689,751 Edwin Prather, Oxnard, CA
- 559,380 Jeff Dinger, Edgewood, MD
- 545,000 Jay Roberg, Winfield, KS

DALLAS QUEST *(Radio Shack)*
- 87 ★Douglas Bell, Duncan, OK
- 90 Roy Grant, Toledo, OH
- 91 John Semonin, Akron, OH
- 92 David & Shirley Johnson, Lancaster, NC
- 93 Tommy McClure, Doyline, LA
- 93 Robert Sunderland, Sacramento, CA

DEATH TRAP *(Soft Sector)*
- 40,674 ★David Entenmann, Monroe, NY

DEFENSE *(Spectral Associates)*
- 365,400 ★Bob Dewitt, Blue Island, IL

DEMOLITION DERBY *(Radio Shack)*
- 104,900 ★Michael Davidson, Cartersville, GA
- 100,900 Scott Lewis, Glide, OR
- 97,600 Hilie Morris, Chicago, IL
- 93,500 Keith Tysinger, Asheboro, NC
- 86,800 Skipper Taday, East Lyme, CT

DEMON ATTACK *(Imagic)*
- 64,195 ★Jon Ruhnow, Duncanville, TX
- 57,655 Tracy Salzman, LaSalle, CO
- 45,775 Mike Watson, Northville, NY
- 34,990 Skip Freamon, Citrus Heights, CA
- 32,190 Roger Dingledine, Chapel Hill, NC

DESERT RIDER *(Radio Shack)*
- 66,872 ★Janine Freamon, Citrus Heights, CA
- 65,215 Skip Freamon, Citrus Heights, CA
- 51,519 Michael Lizardy, Oregon, OH
- 37,912 Kenneth Merkel, Houston, TX
- 37,550 Keith Miller, Houston, TX

DONPAN *(Radio Shack)*
- 20,000 ★Rodrigo Maldonado, Whittier, CA

DOODLEBUG *(Computerware)*
- 2,070,460 ★Robert Hellers, Sparta, IL
- 30,330 Ken Dewitt, Blue Island, IL

DOUBLE BACK *(Radio Shack)*
- 2,565,300 ★Eugene Roosa, Stone Ridge, NY
- 1,615,400 Diane Guernon, Montreal, Quebec
- 450,600 Michael Brennan, Calgary, Alberta
- 32,380 Lorrie Troul, Johnstown, CO
- 27,000 Roy Geeo, Hot Springs, AR

DOWNLAND *(Radio Shack)*
- 88,142 ★Cooper Valentin, Vavenby, British Columbia
- 45,291 Chuck Morey, Bakersfield, CA
- 38,014 James Pede, Roseda, British Columbia
- 37,990 John Siler, Dayton, OH
- 33,450 Mike Tindall, Manitowoc, WI
- 31,138 Maurice MacGarvey, Dawson Creek, British Columbia

DRAGON FIRE *(Radio Shack)*
- 123,120 ★Rupert Young, Sheffield, MA
- 46,713 Gilles Gagne, Sillery, Quebec
- 33,676 Nathanael Heller, Kenner, LA
- 21,221 Jermaine Jackson, Tallulah, LA
- 19,986 Owen Edson, Sherman Oaks, CA

DUNGEON QUEST *(Computerware)*
- 16,985 ★Albert Seliger, Lachine, Quebec

DUNKEY-MUNKEY *(Intellectronics)*
- 276,900 ★Jon Schmidt, Buffalo, MN
- 216,400 Mark Aberdeen, Delisle, Saskatchewan
- 198,000 Pat Leathrum, Newark, DE
- 66,900 Michael Drouin, Reeds Spring, MO
- 47,300 Esther Cassel, Eastern Passage, Nova Scotia

ELEC*TRON *(Tom Mix)*
- 45,890 ★Byron Alford, Raytown, MO
- 40,650 Brad Gaucher, Hinton, Alberta
- 32,625 John Morris, Rustburg, VA
- 28,760 Craig Cornell, Greentown, IN

ENCHANTER *(Infocom)*
- 185/186 ★David Tarleton, Williamsburg, VA
- 80/115 Scott Beiman, Bettendorf, IA

FALCON'S LAIR (THE RAINBOW, 8/85)
- 18,461 ★Joyce Smith, Butler, PA
- 17,463 Michael Scott, Johnstown, NY
- 15,707 Daniel Cecil, Bardstown, KY
- 14,627 Alexander Taday, East Lyme, CT
- 12,497 Dick Teeter, Hawley, PA
- 9,984 Roy Geeo, Hot Springs, AR

FIGHTER PILOT *(Saguaro)*
- 350,450 ★Steven Arvay, St. Louis, MO

FIRESTORM (THE RAINBOW, 1/86)
- 125,960 ★John Gruz, Peabody, MA
- 4,220 Bobby Shotko, Easton, PA
- 2,080 Brook Whitten, Jackson, MS
- 1,600 Rick Busse, Granite City, IL

FROGGIE *(Spectral Associates)*
- 24,380 ★Curtis Taylor, Scarborough, Ontario
- 22,940 Carlton Taylor, Scarborough, Ontario
- 11,250 Mariano Frausto, Blue Island, IL
- 7,270 Christopher Taylor, Scarborough, Ontario

SCOREBOARD

5,200 Hiram Esparza, Blue Island, IL

GALACTIC ATTACK *(Radio Shack)*
54,300 ★Cooper Valentin, Vavenby, British Columbia
51,300 Scott Maestas, Denver, CO
33,930 Allsonit Iarosis, Owego, NY
30,870 Oren Bergman, Herzlia, Israel
19,410 Ron Volans, Ogdensburg, NY

GALAGON *(Spectral Associates)*
1,306,640 ★Jackie Maddox, Iron Station, NC
520,700 Keith Queen, Marietta, GA
352,000 Gail Queen, Marietta, GA
126,590 Shawn Conway, College Point, NY
49,220 Alice Wasneusk, College Point, NY

GALAX ATTACK *(Spectral Associates)*
26,800 ★George De Alberts, Lima, Peru

GHANA BWANA *(Radio Shack)*
459,930 ★Gene Wells, Sisbee, TX
325,900 Rupert Young, Sheffield, MA
259,960 Steve Wright, Fredericton, New Brunswick
253,960 James Ginn, Laurel, IN
248,540 Byron Alford, Raytown, NO
43,180 Arne Peterson, Lake City, FL

GHOST GOBBLER *(Spectral Associates)*
102,540 ★Greg Erickson, Lowell, MA
80,550 Olga Pichard, Lausanne, Switzerland
76,900 Ghislain Chillis, Trois-Rivieres, Quebec
76,900 Pierre Pichard, Lausanne, Switzerland
72,960 Sylvain Castonguay, Chicoutimi, Quebec

GOLD RUNNER *(NOVASOFT)*
855,250 ★Jesse Sanders, Chimney Rock, CO
760,600 Carmen Izzi Jr., Naugatuck, CT
394,550 Marilyn dePierre, Mascouche Hts., Quebec
350,450 Steven Arvay, St. Louis, MO
274,300 Andrew Reeves, Woodinville, WA

THE INTERPLANETARY FRUIT FLY (THE RAINBOW 1/85)
37,000 ★Scott Perkins, Port Orange, FL
26,500 Jon Legg Ie, Bend, OR
22,000 Steven Bullard, Allen, OK
16,500 Michael Scott, Johnstown, NY

INVASION OF THE FLYING SAUCER PEOPLE
920 ★Michael Clerico, Seaford, NY

JUNIOR'S REVENGE *(Computerware)*
1,100,000 ★Mike McCafferty, Idaho Falls, ID
1,090,000 Brett Bias, Enterprise, AL
1,072,600 Matthew Ramsay, Detroit, MI
969,590 Craig Cornell, Greentown, IN
376,000 Mike Wochek, Bethel, CT

JUNKFOOD (THE RAINBOW 11/84)
1,504,930 ★Larry Thomson, Menominee, MI

KARATE *(Diecom Products)*
10,900 ★Jim Doyle, Barrackville, WV
4,200 Scott Beiman, Bettendorf, IA

KEYS OF THE WIZARD *(Spectral Associates)*
662 ★John Fulton, Boydton, VA

THE KING *(Tom Mix)*
4,092,600 ★Fruber Malcom, Culpeper, VA
2,134,500 Tim Rueb, Stevensville, MI
1,670,900 Yolanda Farr, Sayre, PA
1,500,800 Kevin Cornell, Greentown, IN
79,340 Kevin Radwan, Blue Island, IL

KLENDATHU *(Radio Shack)*
1,347,020 ★Paul Shoemaker, Quartz Hill, CA
1,177,550 Dan Franzen, Westlake, OH
412,809 Jay Pribble, Davenport, IA
266,362 Brian Ennis, Wilmington, NC
209,825 Gordon Alvarnaz, Taunton, MA

KNOCK OUT *(Diecom Products)*
168,383 ★John Licata, Richton Park, IL
156,875 Rush Carey, Port Orchard, WA
149,190 Daniel Lesage, Laval, Quebec
137,900 John Rogers, Rye, NH
132,465 Kirk Nedrebeg, Liverpool, OH

LANCER *(Spectral Associates)*
209,200 ★Gordon Alvarnaz, Taunton, MA

LEMANS *(Spectral Associates)*
0:57 ★Robert Eering, Swift Current, Saskatchewan
0:64 Trevor Nagel, Swift Current, Saskatchewan
0:73 Chris Wright, Fredericton, New Brunswick

MADNESS AND THE MINOTAUR *(Radio Shack)*
220 ★John Fulton, Boydton, VA

MARBLE MAZE *(Diecom Products)*
38,354,780 ★Melvin Sharp Jr., Baltimore, MD
106,950 Dan Bouges, Mantic, CT
103,560 Stephane Ouzilleau, Lauzon, Quebec
34,330 Brian Biggs, Galloway, OH
33,410 Brett Bias, Enterprise, AL

MEGA-BUG *(Radio Shack)*
18,674 ★Tim Rueb, Stevensville, MI
17,250 Keith Queen, Marietta, GA
14,861 Michael Clerico, Seaford, NY
14,785 Brian Jamieson, Kingston, Ontario
14,241 Scott Swedis, Spencer, MA
12,101 Scott Maestas, Denver, CO
8,314 Maurice MacGarvey, Dawson Creek, British Columbia

MICROBES *(Radio Shack)*
617,950 ★Michael & David Garozzo, Morrisville, PA
161,920 John Gupti, Columbia, MO
17,900 Hiram Esparza, Blue Island, IL

MONKEY KONG *(Med Systems)*
622 ★Krista Cassel, Eastern Passage, Nova Scotia
478 Glen Brodeau, Otterburn Park, Quebec
365 Mark Ferris, Deep River, Ontario

MONSTER MAZE *(Radio Shack)*
206,780 ★Wanda Jones, Brantford, Ontario
93,890 Rupert Young, Sheffield, MA
60,120 Steve Thomas, Ogdensburg, NY
43,610 Tim Cragg, Kahoka, MO
34,140 Cooper Valentin, Vavenby, British Columbia

MOON HOPPER *(Computerware)*
376,350 ★Rene Ringuette, Riviere-du-Loup, Quebec
102,940 Krista Cassel, Eastern Passage, Nova Scotia
100,410 Craig Cornell, Greentown, IN
80,470 Brett Bias, Enterprise, AL
80,050 Matt Yentes, Urbana, IN

MR. DIG *(Computerware)*
8,987,000 ★Brannon Baxley, Live Oak, FL
6,787,000 Jeff Roberg, Winfield, KS
3,533,650 Paula James, Lumberton, TX
2,261,900 Stephane Ouzilleau, Lauzon, Quebec

MS. MAZE *(Tom Mix)*
12,560 ★George Frausto, Blue Island, IL

MUDPIES *(MichTron)*
77,900 ★Eric Huffman, Rochester Hills, MI
66,700 Kevin Cornell, Greentown, IN

NINJA WARRIOR *(Programmer's Guild)*
106,000 ★Eric Gladstone, Ocala, FL
106,300 Spencer Reeves, Baton Rouge, LA
68,100 Larry Strome, Humboldt, Saskatchewan
60,300 Scott Erman, Belle Mead, NJ
53,200 Mike McCafferty, Idaho Falls, ID
23,320 Vivian Buterin, St. John, MO

NUKE AVENGER *(T&D Software)*
128,125 ★Chris Coleman, Meriden, CT

OFFENDER *(American Business Computers)*
171,900 ★Jorge De Alberts, Lima, Peru

ONE-ON-ONE *(Radio Shack)*
986-22 ★Toby Jacobs, Bellefontaine, OH
970-32 Wes Hill, Vashon, WA
916-34 Todd Amodeo, Winthrop, MA
910-58 Michael Lizardy, Oregon, OH
890-0 •Eric Huffman, Rochester Hills, MI
890-41 Mark Lang, Downieville, CA
434-0 •David Jones, Frostburg, MD
434-8 Kurt Rising, Westfield, MA

OPERATION FREEDOM (THE RAINBOW 8/85)
73,529 ★Kirby Smith, York, PA
23,347 Ed Westberg, Jensen Beach, FL
19,614 Mary Edwards, Imperia, MO
16,882 Paul Walcott, Mt. Clemens, MI
12,673 Alexander Tadey, East Lyme, CT

PANIC BUTTON *(Radio Shack)*
1,120 ★Nathanael Heller, Kenner, LA

PEGASUS AND THE PHANTOM RIDERS *(Radio Shack)*
50,280 ★Rodrigo Maldonado, Whittier, CA

PENGUIN (THE RAINBOW, 2/85)
48,250 ★Paul Wagorn, Carp, Ontario
44,550 Kevin Gallagher, Santa Monica, CA
20,780 George Bodroga, Eureka, CA
8,470 Joseph Tokarz Sr., Blossburg, PA
1,660 Robert Nicosia, Gloversville, NY

PHANTOM SLAYER *(Med Systems)*
398 ★Marc Gagnon, Cap-de-la-Madeleine, Quebec

PLANET INVASION *(Spectral Associates)*
155,000 ★Jimmy Doyle, Barrackville, WV
126,550 Thomas Mayor, Brooklyn, NY
67,700 Alan Drazen, Longwood, FL
58,650 Ghislain Chillis, Trois-Rivieres, Quebec
39,350 Paul Hotz, Herzlia, Israel

POLARIS *(Radio Shack)*
33,770 ★Gene Murphy, Ft. Worth, TX

POLTERGEIST *(Radio Shack)*
7,430 ★Myriam Ferland, Trois-Rivieres, Quebec
6,000 Billy Fairfull, Charleston, SC
4,840 Steve Thomas, Ogdensburg, NY
4,065 Joseph Tokarz Jr., Blossburg, PA
3,440 Bart Springer, Oskaloosa, IA

POOYAN *(Datasoft)*
3,785,000 ★Ben Collins, Clemson, SC
1,987,000 Jon Sowle, Sanford, FL
1,253,200 Thomas Mayor, Brooklyn, NY
266,300 Pat Leathrum, Newark, DE
250,050 Andrew Reeves, Bothel, WA

POPCORN *(Radio Shack)*
165,180 ★Matt Hellemann, Richmond, VA
116,630 Keith Aschemeier, Napoleon, OH
57,680 Melita Boudreault, Port-Cartier, Quebec
56,500 Bruce Johnson, Vavenby, British Columbia
50,210 Scott Swedis, Spencer, MA
28,760 Lorrie Trout, Johnstown, CO
14,700 Shelly Tumbleson, Johnstown, CO

PRO GOLF *(Computerware)*
69 ★David Esarey, Shelbyville, IN

PROJECT NEBULA *(Radio Shack)*
3,815 ★Christopher Romance, Massepequa Park, NY
150 Mariano Frausto, Blue Island, IL

QUE BIT *(Mike Ro Products)*
53,150 ★Neil Edge, Williston, FL

QUIX *(Tom Mix)*
999,999 ★Wilbur James, Charleston, WV
22,454 Mariano Frausto, Blue Island, IL
16,270 Mark Mote, Blue Island, IL

RACER (THE RAINBOW 3/85)
301.9 ★Kirby Smith, York, PA
283.4 Jennifer Woland, Silverdale, PA
17.6 Neil Edge, Williston, FL
15.0 Craig Cornell, Greentown, IN
12.9 Robert Nicosia, Gloversville, NY

RADIO BALL *(Radio Shack)*
4,510,740 ★Les Dorn, Eau Claire, WI
1,945,110 Dominic Deguire, St. Basile, Quebec
1,330,500 Sara Grace, Baltimore, MD
1,301,350 Brian Matherne, Gretna, LA
1,060,250 Pat Mathern, Newark, CA

ROBOTTACK *(Intracolor)*
1,020,800 ★Ian MacLachlan, Bethany, Ontario
931,250 Keith Smith, Bethany, Ontario
637,600 Chad McClellan, Rushville, IN
599,150 Douglas Hauk, Peoria, IL
547,800 Stephane Ouzilleau & Daniel Cloutier, Lauzon, Quebec

ROMMEL 3-D *(MichTron)*
130,300 ★Stephen Charchuk, Yarmouth, Nova Scotia
84,000 Todd Hooge, Comox, British Columbia
68,200 Marc Gagnon, Cap-de-la-Madeleine, Quebec
62,700 Paul Seng, East Lansing, MI
52,700 Alex Seliger, Lachine, Quebec

RUN FOR YOUR LIFE (THE RAINBOW 4/85)
80,000 ★Brian Jensen, Drayton Valley, Alberta
50,000 Karen Goddard, Oshawa, Ontario
20,000 David Craft, Roanoke, VA
20,000 Ryan Devlin, Louisville, KY
20,000 Brian Voges, Jasper, IN

SAILOR MAN *(Tom Mix)*
879,100 ★Alan Drazen, Longwood, FL
741,100 Bryan Jenner, Calgary, Alberta
587,600 Kevin Cornell, Greentown, IN
567,900 Jon Sowle, Sanford, FL
378,300 Brannon Baxley, Live Oak, FL

SAM SLEUTH P.I. *(Computerware)*

10	★John Fulton, Boydton, VA

SANDS OF EGYPT *(Radio Shack)*

77	★Jeff Hillison, Blacksburg, VA

SEA DRAGON *(Adventure International)*

21,200	★George Frausto, Blue Island, IL
19,630	Jorge De Alberts, Lima, Peru

SEA SEARCH *(Mark Data)*

94	★Bob Dewitt, Blue Island, IL

SHAMUS *(Radio Shack)*

17,300	★Rodrigo Maldonado, Whittier, CA
16,805	Arne Peterson, Lake City, FL

SHENANIGANS *(Mark Data)*

90	★Roy Grant, Toledo, OH
95	Jeff Hillison, Blacksburg, VA
95	David Kay, Winnipeg, Manitoba
99	Ed Emmett, Nanticoke, PA

SHOCK TROOPER *(Mark Data)*

214,203	★Fruber Malcom, Culpeper, VA
150,490	Erik Huffman, Rochester Hills, MI
100,040	Rodney Mulneaux, Gig Harbor, WA
69,328	Gordon Alvarnaz, Taunton, MA
49,436	Alex Seiger, Lachine, Quebec

SHOOTING GALLERY *(Radio Shack)*

228,610	★Michael Clerico, Seaford, NY
227,840	Cliff Farmer, McGregor, TX
35,000	Bruce Johnson, Vavenby, British Columbia
18,500	Ken Dewitt, Blue Island, IL
9,950	Hiram Esparza, Blue Island, IL

SKIING *(Radio Shack)*

0:59	★Tim North, Emporia, KS
1:00	Scott Clevenger, Fairmount, IN
1:00	Billy Fairful, Charleston, SC
1:10	Kevin Gallagher, Santa Monica, CA
1:13	Anthony Perez, Westminster, CA
1:13	Chris Wright, Fredericton, New Brunswick

SKRAMBLE *(Tom Mix)*

109,280	★Gilles Gagne, Sillery, Quebec

SLAY THE NERIUS *(Radio Shack)*

294,808	★Joyce Walcott, Mt. Clemens, MI
57,764	Maurice MacGarvey, Dawson Creek, British Columbia

SPACE AMBUSH *(Computerware)*

398,300	★Alice Wasneusk, College Point, NY
116,820	Shawn Conway, College Point, NY
29,480	Frank Canepa III, Santurce, Puerto Rico

SPACE ASSAULT *(Radio Shack)*

248,720	★Larry Lockwood, Benton, AR
232,120	Jim Tucker, Commerce, TX
200,300	Scott Swedis, Spencer, MA
24,430	Michael Drouin, Reeds Spring, MO
23,560	George Frausto, Blue Island, IL

SPACE SHUTTLE SIMULATOR *(Tom Mix)*

555	★Robert Heifers, Sparta, IL

SPEED RACER *(MichTron)*

145,400	★Brian King, Orlando, FL
142,310	Kevin Cornell, Greentown, IN
142,100	Chris Harrison, Brooks, KY
139,210	Alan Drazen, Longwood, FL
129,950	Jeff Dinger, Edgewood, MD

SPIDERCIDE *(Radio Shack)*

1,540	★Blake Cadmus, Reading, PA

STAR BLAZE *(Radio Shack)*

8,400	★John Guptill, Columbia, MO
8,200	Chris Coleman, Meriden, CT
8,100	Curtis Frazier Jr., Enterprise, AL
7,050	Andreas Thaler, Coaticook, Quebec
6,950	Scott Iachetta, Rochester, NY

STARSHIP CHAMELEON *(Computerware)*

46,600	★Glen Blodeau, Otterburn Park, Quebec

STELLAR LIFE-LINE *(Radio Shack)*

78,600	★Don Johnson, Winnipeg, Manitoba
58,580	Stefan Macay, Austin, TX
37,550	Michelle Wynerd, Bloomfield, MI

TEMPLE OF ROM *(Radio Shack)*

1,422,400	★Timothy Bishop, Jacksonville, FL
959,400	Sonya Hurst, Richmond, CA
938,800	Christopher Romance, Massapequa Park, NY
219,300	Maurice MacGarvey, Dawson Creek, British Columbia
158,400	Blake Cadmus, Reading, PA

TIME BANDIT *(MichTron)*

1,025,210	★Terry Moore, St. Catherines, Ontario
747,460	Steven Colaborato, Rosyn, PA
619,270	Kristopher Stelter, Ft. Wayne, IN
215,810	Mark Olson, Whitecourt, Alberta
106,390	Sylvain Castonguay, Chicoutimi, Quebec

TUBE FRENZY *(Aardvark)*

125,800	★Shawn Conway, College Point, NY
87,750	Alice Wasneusk, College Point, NY

TUT'S TOMB *(Mark Data)*

247,800	★Jerry Austin, Baraboo, WI
225,160	Robert Wright, North Queensland, Australia
189,960	Nicole Poulliot, Coors, Mobile, AL
189,940	Mike McCafferty, Idaho Falls, ID
121,740	Ed Martinson, Newton, NC

WARP FACTOR X *(Prickly-Pear)*

12,838,864	★Gordon Alvarnaz, Taunton, MA

WHIRLEYBIRD RUN *(Spectral Associates)*

117,000	★Jeff Ray, N. Charleston, SC
105,400	Sylvain Castonguay, Chicoutimi, Quebec
54,500	Jay Aust, Marlborough, CT
47,050	Michel LeBrun, Anjou, Quebec
43,850	Glen Blodeau, Otterburn Park, Ontario

WILLY'S WAREHOUSE *(Intracolor)*

654,800	★Marilyn dePierre, Mascouche Hts., Quebec

ZAKSUND *(Elite)*

70,600	★Mike Atwood, Cedar Rapids, IA

ZAXXON *(Datasoft)*

2,061,000	★Byron Alford, Raytown, MO
1,300,500	Dan Brown, Pittsford, NY
253,400	Bob Dewitt, Blue Island, IL
159,500	Thomas Mayor, Brooklyn, NY
132,300	Roy Geeo, Hot Springs, AR
94,500	Brian McGuire, Golden, CO

ZONX (THE RAINBOW, 10/85)

21,100	★Philip Johnson, Scottsville, VA
14,300	Dale Taylor, Chattanooga, TN
13,600	Michael Etchason, Sauk Rapids, MN
6,600	Roy Geeo, Hot Springs, AR
6,300	Jeffry Long, Butler, PA

— Debbie Hartley

SCOREBOARD POINTERS

In conjunction with THE RAINBOW's Scoreboard, we offer this column of pointers for our game-playing readers' benefit. If you have some interesting hints and tips, we encourage you to share them by sending them to the Scoreboard, c/o THE RAINBOW

FEEDBACK

Scoreboard:

In response to Donald Dare's letter (May 1986) concerning *Dungeons of Daggorath*, there are five levels. The wizard is on Level 5. I have killed him (and won the game) several times.

You need the Joule and Rime rings plus a certain sword and shield. Those two rings must be "incanted" into their magic forms, though. A dictionary is most helpful!

When you kill the "real" wizard, get his ring, then "incant" it.

Also, in *Pyramid* from Radio Shack, I can only get a few treasures and have found 10 or so rooms. I always get lost in the maze. I found the vending machine, but ended up lost — then dead. Send any help to the "Scoreboard."

Dale Lampe
Sacramento, CA

Scoreboard:

In response to Michael Fischer's letter (May 1986) concerning *Hitchhiker's Guide to the Galaxy*, you also take the toothbrush from Earth. Although you don't always need it, you're better safe than sorry!

You cannot get past the screening door until you're near the end of the game. You should be *very* persistent in going to the Engine Room. Bring the plotter, generator and the Advanced Tea Substitute to the bridge. PUT BIT IN ATS, PUT SMALL PLUG IN SMALL RECEPTACLE, TURN ON DRIVE and off you go. If you want the improbability generator to work on the whole ship, then put the large plug in the large receptacle.

Billy Harris
Beaumont, TX

Scoreboard.

Concerning Peter Thorpe's letter (May 1986), I have some advice. First, jump in the back of the jeep and go north. To get out of the mine, go N, E, N, E, S, E and E. I assume you know about the translator in the logging camp.

I did get across the river, but only once.

There are some things I was wondering. How do you get the children home? How do you cross the river? And finally, what do you need to complete Chapter One? Send any responses to the "Scoreboard."

Dean Wagner
Avon Lake, OH

AUTOPILOT MODE

Scoreboard:

I have a few tips to pass along to anyone who uses *Flight Simulator I* by Radio Shack. The simulator will land itself in

autopilot mode if you set the altitude for zero feet. It will also take off in autopilot if you let the plane reach takeoff speed (160-200), then engage the autopilot.

John L. Whitaker
Hamilton, OH

KEEP YOUR GUARD UP

Scoreboard:

For those who have *Knock Out* by Diecom and are having trouble getting to the champ, this might help.

When starting out with Canvas Kid, put your guard up and wait for him to move slightly, then punch left. You should be able to hit the first guy four times, then wait until he moves again and let him have it four more times with a left punch. You should do this to all boxers except the champ. Remember, though, the higher the rank of the boxer, the less number of times you can hit him.

Phil Levesque
Lewiston, ME

ADVICE FROM THE DEAD

Scoreboard.

In three days I have solved *Dragon Blade* and would like to offer some tips. Although typing "help" in most places only gets you a meaningless response, in two places (both concerning water) it can be very helpful.

To get past the first door you have to follow the advice of the dead man and get your hands dirty. Type REST when you reach a restful place.

Throwing a rock at the right place keeps you from getting killed.

In order to get past the stone door, you have to search one other room very carefully.

I do need help on two other Adventures. First, how do you get past the second spider in *Trekboer*? Second, in my *To Preserve Quandic* hint sheet, it tells me to call Kendall when I'm trapped in the room with the keys. But, when I call him he tells me that I'm not in a desperate situation and he won't help. How do I get past this?

Eric Crichlow
Las Vegas, NV

POTPOURRI

Scoreboard.

I am a new reader of this magazine and I want to give some hints.

In *Offender*, always "look" at the top little section instead of the big principal section. By looking at the small section, the game is easier and you will make hundreds of points.

In *Pooyan* (rounds two and four), don't wait for the wolves to come up, or the "thing" on top of you to fall on your head when there are too many wolves on the tree. Instead, start shooting at the coming balloons (with no wolves). Doing this gets you more points.

In *Flight Simulator I*, if you go north from Airport 0, you will find the Tandy Corp. logo picture and by flying north from Airport 2 you will find an 'N' and an arrow showing where the north is. Later, you can find words saying "Flightsim I." By flying east from Airport 0 you will also find the words "Flightsim I" and by flying east from Airport 2 you will find Airport 4 and an 'N' with an arrow telling where north is. Just before you run out of fuel, you will find two mountains with a lake and a river between them.

In *Cashman*, when there are no cats, go up and get all the bombs that are being thrown.

I need help with Section 41 of *Cashman* and Section 3 in *Poltergeist*.

I also need help with *Adventure in Wonderland*, *Dungeons of Daggorath* and *Sands of Egypt*. Send any help to the "Scoreboard."

Jorge De Albertis
Lima, Peru

HOT STUFF

Scoreboard:

I need help with the Adventure game *Trekboer*. It is the first graphics Adventure I've bought and I can't seem to get past the stream of lava to get to the grating on the other side. If anyone can help me please write to the "Scoreboard."

Alvin Cotton Jr.
Fayetteville, NC

TIMELY TIP

Scoreboard:

Many thanks to David Rodriguez's letter (May 1986) about *Dallas Quest*. I had the same problem Jon Olson had. Now that I've gotten through that, I need help getting past the cannibals and into the cave. How do I do this? Any help will be appreciated.

Arne Peterson
Lake City, FL

TRAPPED IN THE COCO ZONE

Scoreboard:

Can anyone help me with Bruce Bell's *CoCo Zone*? (Appeared in RAINBOW, April 1986.) I can't seem to get past the spider and web.

Kim O'Brien
Crestview, FL

Editor's Note: To escape the tangled web she weaves, a shiny piece of jewelry is what you should leave. Before you arrive though, you'd better take heed, something else shiny, you will also need.

To respond to other readers' inquiries and requests for assistance, reply to "Scoreboard Pointers," c/o THE RAINBOW, P.O. Box 385, Prospect, KY 40059. We will immediately forward your letter to the original respondent and, just as importantly, we'll share your reply with all "Scoreboard" readers in an upcoming issue.

For greater convenience, "Scoreboard Pointers" and requests for assistance may also be sent to us through the MAIL section of our new Delphi CoCo SIG. From the CoCo SIG> prompt, pick MAIL, then type SEND and address to: EDITORS. Be sure to include your complete name and address.

— Debbie Hartley

How Does the CoCo Stack Up?

By William Barden, Jr.

So you plunked down $69.95 and bought a Color Computer on sale and now you're wondering what you've gotten into, eh? Or maybe you've had a Color Computer for a while and you're wondering how the Color Computer stacks up against other computers in the news. Whether you're a new CoCo owner or an old hand, every once in a while I think it's a good idea that we stand back and assess ourselves and our equipment. Just how does the CoCo compare to systems like the Commodore 64, IBM PC*jr*, Macintosh, Atari ST and others? This is not a task for the average CoCo freak — he's simply too chauvinistic, too enthralled with the system for which he spent hard-earned money. I'm also biased, but I think I can separate my bias from the facts. I've been in all types of computing since 1965 — everything from mainframes to micros. Currently I have a Radio Shack TRS-80 Model I, TRS-80 Model II, TRS-80 Model 4, two Color Computers, a Tandy 1000, a Tandy 2000, an IBM PC, an IBM PC*jr*, a Commodore 64 and assorted other smaller computers, like the little-known Timex 2068. Want a perspective about your machine? I think I can do an unbiased job.

Eight Bits, Sixteen Bits, and More

Computer science students love to beat each other over the head with their computer systems the same way they do with automobiles. "My Chevy can take your Ford!" has turned into "My Mac can run rings around your CoCo!" and other insults. When I'm asked what system I have at home, I tell them a Cray X-MP. Since this is a ten million dollar supercomputer, it shuts them up for a while.

Whether you have a CoCo or Cray, though, one of the ways computers are compared is by the size of data processed by the microprocessor inside the

Bill Barden has written 27 books and over 100 magazine articles on various computer topics. His 20 years experience in the industry covers a wide background: programming, systems analyzing and managing projects ranging from mainframes to microcomputers.

machine. Our Color Computers have a 6809 microprocessor, which handles data in 8-bit chunks. (A bit, or binary digit, can hold one piece of information, a yes/no or 0/1 piece of data.)

The 8088 microprocessor used in the IBM PC, PC*jr*, and Tandy 1000, among others, is widely touted as a 16-bit microprocessor, but is really an 8-bitter like the 6809. Both the 6809 and 8088 can perform some 16-bit operations, but move data between memory and central processing unit eight bits at a time. The microprocessor used in the Tandy 3000 and IBM AT is a true 16-bit microprocessor, an 80286.

Many other microcomputers use older microprocessors than the 6809 — the Apple II series and Commodore VIC-20 or 64, for example, use a 6502 microprocessor, decidedly an 8-bitter. The Apple Macintosh uses a newer 16-bit microprocessor, a 68000, as does the Atari ST line and the Amiga.

So that puts the Color Computer on a par with the microprocessor used in the Tandy 1000, IBM PC and PC*jr* — about midrange in today's market. The question is, is a 16-bit microprocessor twice as good as an 8-bitter? The answer is not at all. Given a choice between a 16-bitter and an 8-bitter, I'd take the 16-bitter, but I wouldn't expect it to do the job twice as fast. If you've ever seen some of the early Macintosh word processing applications, you'd wonder how such a fast microprocessor can operate so slowly. More important than the microprocessor size is how the system is put together as an entire package — hardware design, software design, operating system and so forth.

To sum it all up, let's give the Color Computer a seven out of a possible 10 for the microprocessor.

The More Memory the Better?

The Color Computer has a maximum memory limit of 65,536 bytes, each byte capable of holding one character of data, or about one BASIC keyword. Not all of this memory is available for user program storage, though. Normally, about half of the memory holds the BASIC interpreter. The remaining 32,768 bytes is an enormous amount of memory compared to minicomputer systems of the 1960s, many of which used only 8,192 bytes to run their programs. However, the 32K (K standing for 1,024) bytes does pale in comparison to the 640K bytes available on the Tandy 1000, IBM PC, and PC*jr*, and the millions of bytes available on more recent systems such as the IBM AT and Tandy 3000. How much memory is really needed?

It really depends upon the task, but generally, the more memory, the better. Part of the reason people clamor so much for additional memory is that applications software packages like Lotus 1-2-3 are memory hogs — they require hundreds of thousands of bytes to run. However, there are many other packages that do not require such huge amounts of memory. Perhaps 90 percent of all software programs will run in a 32K byte system.

Systems like the Commodore 64 and Apple II series have about the same amounts of memory as the Color Computer. However, there's no question that this is one area in which the Color Computer could stand some beefing up. If a new Color Computer is released, we'll certainly see additional memory as an option, perhaps as much as 512K. In the meantime, the Color Computer can run virtually any application, due to the large amounts of software packages available from Radio Shack and outside vendors.

"More important than the microprocessor size is how the system is put together as an entire package — hardware design, software design, operating system and so forth."

Because the Color Computer could use more memory, we'll give the CoCo a three out of a possible 10 on memory.

Good Graphics

One of the nicest things about the Color Computer is its graphics — a maximum of 256 pixels, or dots, per

horizontal row by 192 pixels per vertical column, making a total of 49,152 separate dots on the screen, each of which can be one of two colors. Another mode allows 128 by 192 dots in four colors. How does this compare to other systems? At the top of the line is the Commodore Amiga, which has a maximum of 640 by 400 pixels in 16 colors. Next is the Tandy 2000 with 640 by 400 pixels in eight colors. The Atari ST is in this 640 by 400 range. The Enhanced Graphics Adapter of the IBM PC allows 640 by 350 pixels in 16 colors. The Apple II series allows 560 by 192 pixels in 16 colors. The standard IBM PC*jr* is next. The PC*jr* graphics is virtually identical to the Tandy 1000 — 640 by 200 pixels in four colors. The Apple Macintosh has 512 by 342 pixels, but only in black and white. At the bottom of the range are machines like the Atari 1200 series with 320 by 193 pixels and older machines with even less resolution. The Color Computer is in this last category.

You can see that the Color Computer is marginal as far as graphics goes — newer machines are tending towards better and better graphics. Of course, to get the better graphics, you need an expensive color monitor at perhaps $400 extra over the cost of the system. Then there's the fact that 640 by 400 pixels in 16 colors requires a megabyte(!) of memory and a great deal of time to process. The result is a very slow screen update. With 128 by 192 four-color and 256 by 192 two color graphics, Color Computer screen updates can be done rapidly, and you don't need huge amounts of memory to store additional screen pages.

Again, though, I'd have to say that the more screen resolution, the better, even if the full capability of the system isn't realized. Let's give the Color Computer four out of 10 on graphics.

"One-and-a-half million users can't be too far wrong — let's give the Color Computer a nine out of 10 for the user base."

Languages

Most computers have a built-in BASIC language capability — the IBM PC and PC*jr* do, as does the Color Computer. The interesting thing about BASIC is that most versions of it have been programmed by Microsoft, a software company in Bellevue, Washington that got in on the ground floor of microcomputers and has remained a major market force. As a result, Color Computer BASIC (including Extended BASIC) is remarkably like the PC and PC*jr* BASIC in many respects. The LINE, CIRCLE, and other graphics commands are virtually identical to those used on the IBM PC/PC*jr*. Color Computer BASIC is therefore a strong BASIC that is much more of a standard than BASICs such as Applesoft BASIC or Commodore BASIC.

Currently, the most popular computer languages are BASIC, PASCAL, C, FORTRAN, COBOL and assembly language. All of these are available on the Color Computer via the OS-9 Operating system. OS-9, of course, doesn't come with the system. It's a fairly inexpensive option, however, and you can pick the language or languages you require. The IBM PC and PC*jr* also have all languages available for them, but many of the other systems, especially the newer ones, may not have certain languages. Assembly language is generally available on all systems — I've mentioned the *EDTASM+* product — and other assembler programs are available for the Color Computer as well. Assembly language is a difficult language in which to program, but it produces extremely fast programs.

As far as languages, therefore, I'd have to give the Color Computer a nine on a scale of 10; just about everything you'd want is available, although you do have to use the OS-9 operating system in some cases.

Operating Systems

An operating system controls system resources such as printers and disk drives and it acts as an overseer to control all system operations. Although Disk BASIC is called Disk BASIC, there are many functions in BASIC that would properly belong in the operating system realm; commands like DIR, KILL and LOADM. The intent of Radio Shack was to make a simple operating system, and they succeeded very well — the Disk BASIC operating system commands include most of the common things you'd want to do with any operating system.

In addition to Disk BASIC there's the sophistication of OS-9. OS-9 is a Color Computer form of the Unix operating system, an operating system developed by Bell Telephone Labs and touted as one of the best around. Personally, I'm less enthusiastic than most about OS-9 and Unix. It's sophisticated and versatile, to be sure, but it's not very friendly and hard for the beginner to use. However, I would rank OS-9 above such operating systems as the MS-DOS used on the IBM series and Tandy 1000, 1200, 200 and 3000.

Without OS-9, I'd have to give the Color Computer four out of a possible 10; with OS-9, it gets an eight — one point is taken off because of OS-9's complexity.

The CoCo User Base

It's funny how you can have an exciting computer, but if the system doesn't take off, nobody develops software for it, potential buyers lament the lack of software and delay their purchase or buy another system, and the product may fail. This was the case for many computers over the last ten years or so — computers such as the Timex 2068 and Coleco Adam. One current product for which this may be happening is the Commodore Amiga, which seems a little expensive for the impressive graphics possible on the system.

The base of users for the system, then is very important. It takes sales of hundreds of thousands of systems before the snowball effect works the other way, inducing more and more people to develop software for the system, design system add-ons and produce other related products. Current estimates of sales for the Color Computer are about 1.5 million units! That's not a bad figure, to say the least. For contrast, the IBM PC is one of the best selling computers of all time, certainly in the millions of units. The Commodore 64

ınd VIC-20 have also sold millions. The Apple MacIntosh has probably sold in he high hundreds of thousands. The BM PC*jr* has sold in the low hundreds of thousands. Systems such as the Coleco Adam or Timex 2068 have sold only tens of thousands. The Color Computer, then, is toward the high end of sales compared to other systems, but s not the all-time best selling small computer.

With 1.5 million units, however, the CoCo has a plethora of hardware and software products. I'll just mention a few that have blown my socks off. There's *CoCoMax*, a terrific color graphics/mouse program which rivals the Macintosh MacDraw, but in color! There's *EDTASM+*, one of the best assemblers on the market today in terms of interaction with the user and integrating editing, assembling, and debugging facilities. There's OS-9, the professional Operating System for the Color Computer which enables several tasks to be run concurrently on the CoCo and provides more than enough power for even a jaded mainframe user. However, there are a lot of small products too, ranging from the Y cables sold by Spectrum Projects to the neat games of MichTron. The point is, there's a huge user base and a full spectrum of products to support the computer, which you certainly will not find in systems which haven't made the grade.

One-and-a-half million users can't be too far wrong — let's give the Color Computer a nine out of 10 for the user base

Cost

This is a subject dear to everyone's heart and probably is the biggest single factor in a small computer purchase. At the RAINBOWfest in Palo Alto earlier this year I saw 16K Extended BASIC Color Computers going for $59.95! Those types of prices make the Color Computer a tough system to beat. Another decided plus in favor of the Color Computer is that the system is modular — you can start off with the basic box and then add disk drives and other equipment as you require.

Figuring an Extended Color Computer with a single disk drive, 64K of memory, and color television monitor, the best current price would be about $600. The Atari ST with monitor is about $700. A Tandy 1000, an excellent buy, can be purchased for about $1000 with color monitor. The Commodore Amiga with monitor is about $1400. An IBM PC with a single drive and color monitor is about $1800. The Color Computer, then, is not as dramatically different as you might expect when it comes to price, but it sure is an easy system on which to start off inexpensively, and one that will grow with you.

However, there's another factor in price. Lotus 1-2-3 for the IBM PC costs $300. The Microsoft C compiler for the PC costs $250. Contrast this with the $29.95 for Radio Shack's "Spectaculator" and $99.95 for the OS-9 C compiler on the Color Computer. Just walk through the aisles of any RAINBOWfest to see how inexpensive hardware and software for the Color Computer is.

Let's give the Color Computer a seven out of 10 on the basis of its bargain prices for an overall system and inexpensive hardware and software add-ons.

To Sum It All Up

At this point we can tabulate the different categories we discussed above. A lot of this, I admit, is somewhat subjective, but I've tried to be unbiased. Here's the scorecard:

Microprocessor	7 out of 10
Memory	3 out of 10
Graphics	4 out of 10
Languages	9 out of 10
Operating System	8 out of 10
User Base	9 out of 10
Cost	7 out of 10

Obviously simply adding up these counts won't give you an absolute figure on how the Color Computer stacks up against the competition. The biggest reason for this is that the criteria above must be "weighted." With some users, cost is a very important factor, with others, the difference between a $3000 Tandy 3000 system and an $600 Color Computer system is no problem at all. Other people run only Lotus 1-2-3 and would like huge amounts of memory for their spreadsheets. Still other owners are into languages such as C and assembly language and want a system that runs their favorite compiler in a friendly environment. Other users want a system with good, inexpensive graphics games for their kids. I'll leave it up to you to determine your own needs and how much weight you'd like to give each factor.

"Do I like the Color Computer? Somehow it exudes a user friendliness my IBM PC just can't compete with."

From the comparisons above, though, I think it's fair to draw the following conclusions: the Color Computer is an inexpensive system with inexpensive software and hardware add-ons. The system uses a fairly recent microprocessor that provides adequate computing power. Memory is limited, but large enough to run most applications. While the graphics don't match the graphics of newer systems, they are adequate for most applications and games. The Color Computer has a wide range of languages, a good basic operating system, and a harder-to-use, but powerful, advanced operating system. It's user base guarantees good support from the manufacturer and developers of hardware and software products.

And now for my personal, strictly biased opinion: Do I like the Color Computer? Somehow it exudes a user friendliness my IBM PC just can't compete with. I like the classic lines of the instruction set of the 6809 microprocessor. I even, believe it or not, like the feel of the keyboard. When I see the graphics on such programs as *Sands of Egypt* or *CoCoMax*, I forget that the resolution isn't quite as good as a Tandy 1000. I especially like wandering down those aisles at RAINBOWfests, picking up fantastic bargains on hardware and software. The CoCo will be around for a while in my computing room and I hope in yours as well.

Exploring the Card Catalog

By Steve Blyn
Rainbow Contributing Editor

It is never too early to begin building good library skills. Many public libraries have story hours for children, beginning with the preschool set. There are many skills needed to be able to use libraries to their fullest extent. Children in the elementary grades need continued instruction and guidance in the use of their classroom and school library facilities.

The school librarian or classroom teacher usually helps individuals and groups to select books or to find books related to a particular topic or problem. She sets aside periods in which she tells a story, introduces children to new books and acquaints them with the library setup. She also explains and demonstrates the use of the card catalog.

By the end of the fifth or sixth grade, most students are thoroughly familiar with the organization of the school library. They understand classification of books and library arrangement, use of encyclopedia or reference book letter keys, reference guides, card catalogs and the use of a variety of reference books. These reference books include encyclopedias, atlases, almanacs, yearbooks, telephone directories and newspapers. The students often collect and organize materials for class assignments or their own class library.

One skill we feel dominates library use is the card catalog. The ability to properly use it often determines if one can locate the proper material one needs. Some libraries are now using methods other than the traditional card catalog. The newer methods usually are less expensive to the library. Whatever the system, the material it contains is similar.

This month's program will help familiarize students with the information contained on cards from a typical card catalog. An illustration of a typical card is shown. The student is asked to locate the author's last name, the title, the publisher and the number of pages.

Lines 30 and 40 set the dimensions for the number of cards. Lines 50 through 70 read the cards' information from the DATA lines. Lines 80 through 300 ask the questions about the four pieces of information we are looking for. If the answer is correct, a pleasant tune is heard. If incorrect, the correct answer is inserted in the proper place.

The DATA lines contain the cards' contents. They are entered in the following manner: author's last name, author's first name, title of book, illustrator, publisher, copyright date and number of pages.

Please note there is no comma at the end of the number of pages which is the end of the DATA line. Placing a comma here is a common mistake that alters the results desired.

There are currently only five cards in our catalog. You may add an almost endless number of cards if you desire. Merely follow the DATA line pattern started by the program and shown above. Enter your DATA on lines that you create following Line 420. Be sure to adjust the value of 'N' on Line 30 to the new total amount of cards.

We, at Computer Island, hope that you will use and modify this program for your children's needs. It would be a nice experience for the children to assist you in selecting more books to include and in entering the new DATA lines. □

Steve Blyn teaches both exceptional and gifted children, holds two master's degrees and has won awards for the design of programs to aid the handicapped. He owns Computer Island and lives in Staten Island, New York.



The listing: CARD LOG

```
1Ø REM "CARD CATALOG"
2Ø REM"STEVE BLYN,COMPUTER ISLAN
D SOFTWARE,STATEN ISLAND,NY,1986
3Ø N=5
4Ø DIM A$(N),B$(N),C$(N),D$(N),E
$(N),F$(N),G$(N)
5Ø FOR T= 1 TO N
6Ø READ A$(T),B$(T),C$(T),D$(T),
E$(T),F$(T),G$(T)
7Ø NEXT T
8Ø CLS5:PRINT@7,"THE CARD CATALO
G";
9Ø PRINT@32,STRING$(32,2Ø4);
1ØØ FOR T=1TO5:PRINT:NEXT T
11Ø R=RND(N)
12Ø PRINT@64,A$(R)",B$(R)
13Ø PRINT@1Ø4,C$(R)
14Ø PRINT@136,D$(R)",ILLUS."
15Ø PRINT@168,E$(R)
16Ø PRINT@18Ø,",C.";F$(R)
17Ø PRINT@2ØØ,G$(R);" P.,ILLUS."
18Ø PRINTSTRING$(32,195);
19Ø PRINT@256,"AUTHOR'S LAST NAM
E";:INPUT L$
2ØØ IF L$=A$(R) THEN GOSUB 35Ø:G
OTO 22Ø
21Ø IF L$<>A$(R) THEN GOSUB 36Ø:
PRINT@274,"-";A$(R)
22Ø PRINT@32Ø,"TITLE";:INPUT T$
23Ø IF T$=C$(R) THEN GOSUB 35Ø:G
OTO 25Ø
24Ø IF T$<>C$(R) THEN GOSUB 36Ø:
PRINT@325,"-"C$(R)
25Ø PRINT@384,"PUBLISHER";:INPUT
 P$
26Ø IF P$=E$(R) THEN GOSUB 35Ø:G
OTO 28Ø
27Ø IF P$<>E$(R) THEN GOSUB 36Ø:
PRINT@393,"-"E$(R)
28Ø PRINT@448,"HOW MANY PAGES";:
INPUT M$
29Ø IF M$=G$(R) THEN GOSUB 35Ø:G
OTO 31Ø
3ØØ IF M$<>G$(R) THEN GOSUB 36Ø:
PRINT@462,"-";G$(R)
31Ø PRINT@482,"enter TO GO ON OR
 e TO END";
32Ø EN$=INKEY$
33Ø IF EN$="E" THEN CLS ELSE IF
EN$=CHR$(13) THEN RUN ELSE 32Ø
34Ø END
35Ø PLAY"L5Ø04CEGEEEGC":RETURN
36Ø PLAY"O2L1ØØCCC":RETURN
37Ø DATA SPEARING,JUDITH,GHOSTS,
MARVIN GLASS,SCHOLASTIC,1972,16Ø
38Ø DATA HENTOFF,NAT,JAZZ COUNTR
Y,CHARLES MINGUS,DELL,197Ø,143
39Ø DATA DECK,JOHN,BEYOND TOMORR
OW,RICHARD SANDERS,NOBLE,197Ø,15
8
4ØØ DATA GRAVES,CHARLES,JOHN KEN
NEDY,PAUL FRAME,DELL,1966,8Ø
41Ø DATA DAVISON,MICKIE,GEORGE W
ASHINGTON,SEYMOUR FLEISHMAN,SCHO
LASTIC,1957,71
42Ø REM"YOU MAY ADD MORE DATA LI
NES HERE FOR MORE BOOKS. BE SURE
 TO KEEP THE VALUE ON 'N' ON LIN
E 15 CURRENT."
```




AT LAST! ! !

ARE YOU TIRED OF PLUGGING AND UNPLUGGING PERIPHERALS?

WOULD YOU RATHER NOT SPEND $50.00 ON A SWITCHING BOX?

PLAN-NET FORMS now offers complete plans (assembly instructions, diagrams, and parts lists by vendor) for RS-232 port switching boxes.

All parts are available almost everywhere locally at a small fraction of the cost of most commercially offered boxes.

Only $5.00 PER SET!!!

MasterCard VISA

Plan-Net Forms

P.O. Box 1061
Wilkes-Barre, PA 18702-1061
717-821-2946

Telewriter-64

the Color Computer Word Processor

- **3 display formats: 51/64/85 columns × 24 lines**
- **True lower case characters**
- **User-friendly full-screen editor**
- **Right justification**
- **Easy hyphenation**
- **Drives any printer**
- **Embedded format and control codes**
- **Runs in 16K, 32K, or 64K**
- **Menu-driven disk and cassette I/O**
- **No hardware modifications required**

THE ORIGINAL

Simply stated, Telewriter is the most powerful word processor you can buy for the TRS-80 Color Computer. The original Telewriter has received rave reviews in every major Color Computer and TRS-80 magazine, as well as enthusiastic praise from thousands of satisfied owners. And rightly so

The standard Color Computer display of 32 characters by 16 lines without lower case is simply inadequate for serious word processing. The checkerboard letters and tiny lines give you no feel for how your writing looks or reads. Telewriter gives the Color Computer a 51 column by 24 line screen display with *true lower case characters*. So a Telewriter screen looks like a printed page, with a good chunk of text on screen at one time. In fact, more on screen text than you'd get with Apple II, Atari, TI, Vic or TRS-80 Model III.

On top of that, the sophisticated Telewriter full-screen editor is so simple to use, it makes writing fun. With single-letter mnemonic commands, and menu-driven I/O and formatting, Telewriter surpasses all others for user friendliness and pure power

Telewriter's chain printing feature means that the size of your text is never limited by the amount of memory you have, and Telewriter's advanced cassette handler gives you a powerful word processor without the major additional cost of a disk

> *one of the best programs for the Color Computer I have seen*
> - Color Computer News, Jan 1982

TELEWRITER-64

But now we've added more power to Telewriter. Not just bells and whistles, but major features that give you total control over your writing. We call this new supercharged version Telewriter-64 For two reasons.

64K COMPATIBLE

Telewriter-64 runs fully in any Color Computer — 16K, 32K, or 64K, with or without Extended Basic, with disk or cassette or both. It automatically configures itself to take optimum advantage of all available memory. That means that when you upgrade your memory, the Telewriter-64 text buffer grows accordingly. In a 64K cassette based system, for example, you get about 40K of memory to store text. So you don't need disk or FLEX to put all your 64K to work immediately.

64 COLUMNS (AND 85!)

Besides the original 51 column screen, Telewriter-64 now gives you 2 additional high-density displays. 64 × 24 and 85 × 24!! Both high density modes provide all the standard Telewriter editing capabilities, and you can switch instantly to any of the 3 formats with a single control key command

The 51 × 24 display is clear and crisp on the screen. The two high density modes are more crowded and less easily readable, but they are perfect for showing you the exact layout of your printed page, *all on the screen at one time*. Compare this with cumbersome "windows" that show you only fragments at a time and don't even allow editing

RIGHT JUSTIFICATION & HYPHENATION

One outstanding advantage of the full-width screen display is that you can now set the screen width to match the width of your printed page, so that "what you see is what you get." This makes exact alignment of columns possible and it makes hyphenation simple.

Since short lines are the reason for the large spaces often found in standard right justified text, and since hyphenation is the most effective way to eliminate short lines, Telewriter-64 can now promise you some of the best looking right justification you can get on the Color Computer.

FEATURES & SPECIFICATIONS:

Printing and formatting: Drives any printer (LPVII/VIII, DMP 100/200, Epson, Okidata, Centronics, NEC, C Itoh, Smith-Corona, Terminet, etc)

Embedded control codes give full dynamic access to intelligent printer features like: underlining, subscript, superscript, variable font and type size, dot-graphics, etc

Dynamic (embedded) format controls for: top, bottom and left margins, line length, lines per page, line spacing, new page, change page numbering conditional new page, enable/disable justification

Menu-driven control of these parameters, as well as: pause at page bottom, page numbering, baud rate (so you can run your printer at top speed), and Epson font. "Typewriter" feature sends typed lines directly to your printer, and Direct mode sends control codes right from the keyboard. Special Epson driver simplifies use with MX-80

Supports single and multi-line headers and automatic centering. Print or save all or any section of the text buffer. Chain print any number of files from cassette or disk

RAINBOW CERTIFICATION SEAL

File and I/O Features: ASCII format files — create and edit BASIC, Assembly, Pascal, and C programs, Smart Terminal files (for uploading or downloading), even text files from other word processors Compatible with spelling checkers (like Spell 'n Fix).

Cassette verify command for sure saves Cassette auto-retry means you type a load command only once no matter where you are in the tape

Read in, save, partial save, and append files with disk and/or cassette. For disk: print directory with free space to screen or printer, kill and rename files, set default drive. Easily customized to the number of drives in the system

Editing features: Fast, full-screen editor with wordwrap, block copy, block move, block delete, line delete, global search and replace (or delete), wild card search, fast auto-repeat cursor, fast scrolling, cursor up, down, right, left, begin line, end line, top of text, bottom of text; page forward, page backward, align text, tabs, choice of buff or green background, complete error protection, line counter, word counter, space left, current file name, default drive in effect, set line length on screen.

Insert or delete text anywhere on the screen without changing "modes." This fast "free-form" editor provides maximum ease of use Everything you do appears immediately on the screen in front of you Commands require only a single key or a single key plus CLEAR

> *...truly a state of the art word processor .. outstanding in every respect*
> The RAINBOW, Jan 1982

PROFESSIONAL WORD PROCESSING

You can no longer afford to be without the power and efficiency word processing brings to everything you write. The TRS-80 Color Computer is the lowest priced micro with the capability for serious word processing. And only Telewriter-64 fully unleashes that capability.

Telewriter-64 costs $49.95 on cassette, $59 95 on disk, and comes complete with over 70 pages of well-written documentation. (The step-by-step tutorial will have your writing with Telewriter-64 in a matter of minutes.)

To order, send check or money order to:

Cognitec
704 Nob Street
Del Mar, CA 92014

Or check your local software store. If you have questions, or would like to order by Visa or Mastercard, call us at (619) 755-1258 (weekdays, 8AM-4PM PST). Dealer inquiries invited. (Add $2 for shipping. Californians add 6% state tax.)

Available at
Radio Shack stores
via express order
catalogue #90-0253
90-0254

Apple II is a trademark of Apple Computer, Inc., Atari is a trademark of Atari, Inc., TRS-80 is a trademark of Tandy Corp, MX-80 is a trademark of Epson America, Inc.

The 'Hidden' Computers

By Michael Plog, Ph.D.
Rainbow Contributing Editor

The education industry is comprised of much more than teachers and students. Many people work for education, but never see a classroom, or even a school. Yet, their work is important, and helps to make teachers' jobs more productive. Computers play a role for these people too, and assist in getting an educational product developed and delivered.

One example of such an educational effort is the production of educational television tapes for schools and general public. Preparation of a videotape can be a very simple affair, providing you do not mind a low-quality final product with an amateurish appearance. With a video cassette recorder and a video camera, anyone can take home movies and show them in classrooms. Production of a high-quality tape, however, is an entirely different matter.

Before videotape, preparation of an educational film could also have been a simple affair. Many people owned home movie cameras and took movies. An amateur could even edit the film by looking at each frame of the film, cutting and splicing until the edited version was more acceptable to the audience. With videotape, editing cannot be done with a sharp blade and glue. You cannot simply cut a piece of videotape and attach another piece to it. Electronic editing is required.

Another problem of video editing is school students (and members of the public such as school board members, parents, etc.) have a more sophisticated attitude toward educational video materials than in the past. The quality of the message is often measured by the quality of the medium. We have been spoiled by slick network production, not to mention Sesame Street and other professional material now available for educational use.

Editing a videotape has some similarities to editing celluloid film. A videotape has frames, much like a film has frames. On celluloid film, a single frame is one picture, one exposure of light onto the film. One frame of a videotape is a sweep of the cathode ray gun down the video screen. There are thirty such complete sweeps every second, therefore a video frame is 1/30 of a second. To edit a tape, you need to record the frames wanted onto a new tape. A blank tape is used to receive the images from other tapes. The final recording has to be in the proper sequence, even if that means going backwards on one of the raw tapes.

Every videotape contains the image plus other information. Each frame has room for 80 bits of audio information. Some of that information is used as a time code track. Each frame of video tape has a code that tells the hours, minutes, seconds and frame number. A technician can call up the exact frame of a piece of tape that is two minutes, 14 seconds, and 29 frames from the beginning.

Now we see how to edit videotape. The director can indicate the final tape should begin with the shot happening four minutes, two seconds, three frames after the start of the raw tape, go for 20 frames, then insert the shot that is one hour, eight minutes, five seconds and three frames. This process continues for the entire length of the finished product. This type of editing is much more difficult than cutting a strip of celluloid and physically inserting it at the right place.

There are companies that provide the equipment necessary for such editing. One machine is required to record the final product and, generally, more than one machine is used to provide the incoming source tape, since most people will have more than one reel of tape containing the original information.

Recently, I observed such an operation at the television section of the Illinois State Board of Education. One recording machine was connected to six source tape players. Two other input devices were used to control screen graphics. The editing process was handled by a computer, as you might well imagine. The impressive part of this educational television facility is that a Radio Shack Color Computer is the machine controlling this massive array of complex electronic video equipment. That's right — the little white box from Tandy, almost unnoticed among dials, knobs, blinking lights and huge machines, was the brains of this operation.

The Color Computer has several jobs in this facility. It must first touch and read each of the incoming tape machines and the recording machine. The

Michael Plog received his doctorate degree from the University of Illinois. He has taught social studies in high school, worked in a central office of a school district and currently is employed at the Illinois State Board of Education.

computer has to determine if the tape machine is on with a tape correctly inserted and ready to play. The computer provides commands to each of the machines to stop, get ready, play, and most crucial of all, to determine the frame position called for by the director.

The creator of this system, Mitch Hopper, loads up to six tapes, then sits at the keyboard of the Color Computer. He types in a command to record from one of the input machines, beginning at a specified location, for the required length of time. There are hundreds of such commands necessary for one final tape. Each command is also listed to a printer for later verification and tracking of the finished tape.

The computer then goes to the specified input machine, reads the time code, determines how far away (and in which direction) the requested time code is, moves the tape back and forth until it has found the correct beginning spot. The exact frame of the input tape is then noted. To further complicate matters, the electronic devices have a delayed reaction time. A tape machine cannot simply begin playing, it first has to get up to speed then start showing the signals for that frame. Each input machine has a different delay time, meaning the Color Computer has to keep these times straight for every machine.

Finally, the Color Computer must start the machine providing the incoming signal, as well as the recording machine, at exactly the correct time, so the specified frame — not one frame ahead or behind — is recorded on the final product. With thirty frames per second, the job requires the combination of high quality in computer, software and operator.

I was amazed when I found the Color Computer performing this task. I was even more amazed when the man who developed this system said he had written the entire program in BASIC. Machine language would have been faster than BASIC, but would not greatly increase actual speed, because of the time required for a human to change tapes on the machines.

The total material investment in this system was one Color Computer, a tape player for the computer (no need to use disk; the program stays in the machine), and about $250 for a Programmable Peripheral Interface box. The PP contains extra memory and the addi tional ports necessary for "talking" witl the tape machines. No monitor wa necessary, there were plenty just layin around. After all, this is a facilit devoted to video. Mr. Hopper spent si weeks programming the Color Compu ter and building the interface device.

It is possible to purchase hardwar and software specially developed fo this type of operation. Such a system t perform the tasks currently done by th Color Computer would cost abou $30,000. Of course, that does not in clude the time necessary to learn how t operate the equipment.

So, the next time you show a class videotape, or watch something on edu cational television, think of the peopl behind the production. One of them jus might be an extremely creative perso named Mitch sitting in front of a littl white computer from Radio Shack.

That's all for now. If you have comment or question about this article or any matter related to education an the Color Computer, please contact m at 829 Evergreen, Chatham, Illinoi 62629.

CORRECTIONS

"Wishing Well: Achieving Arcade Game Speed in BASIC" (July 1986, Page 98): Due to a printing error, some lines in the *Trench* listing may be difficult to read. Line 15 should read as follows:

```
15 PMODE3,1:R$="U24C2F2E4F2G4C4N
H3F20L24":DRAW"C4S4BM0,47"+R$:R$
="U24L4C2H2G2F4C4NE3G20R28":DRAW
"BM255,47"+R$:PAINT(3,41),4,4:PA
INT(253,41),4,4:PMODE4,1:RETURN
```

Line 17 should read:

```
17 LINE-(180,20),PSET:LINE-(256,
40),PSET:LINE(76,20)-(0,0),PSET:
LINE(180,20)-(256,0),PSET:PAINT(
10,2),2,2:PAINT(10,20),4,2:PAINT
(246,20),4,2:PMODE4,1:LINE(0,144
)-(256,192),PSET,BF:FORI=1TO65:P
SET(RND(256),RND(66)+30):NEXT
```

"The Old-Time Banner Printer" (May 1986, Page 150): Credit should have been given to Francis S. Kalinowski for portions of the program concept and some of the operating routines that were derived from his original work. We regret this omission.

"Juggle Bills, Juggle Bills, Juggle All the Way!" (March 1986, Page 76): Glen Dufur has written to point out that, although the keybox for the article indicates otherwise, *Homebdgt* is cassette-based and does not support disk.

For quicker service, Corrections will be posted on Delphi as soon as they are available in the Info on Rainbow topic area of the database. Just type DATA at the CoCo SIG prompt and INFO at the Topic? prompt.

Help Us Battle the High Cost of Disk Drives

NOW . . .
V-PRINT
A utility to print directory on paper
$9.95

New Lower Price Un-DISK Drives ~~$49.95~~? $34.95

You Bet! There are empty spaces in your 32K and 64K CoCo. The Preble VDOS Un-DISK helps you fill them up with PROGRAMS!

- Un-DISK uses your computer's extra memory like a fast disk drive
- Un-DISK can store BASIC and MACHINE LANGUAGE programs.
- Un-DISK is INVISIBLE Yup! Un-DISK does not interfere with normal CoCo or Computer Operation
- Un-DISK appears only when you type the magic word VDOS
- Un-DISK comes with comprehensive instructions which you may not need because
- Un-DISK is self-prompting and easy to use!
- Un-DISK is provided on cassette
- Un-DISK is faster than a slow clumsy DISK DRIVE and best of all .
- Un-DISK is CHEAPER than a DISK DRIVE!
- Un-DISK will work even if you already own a disk but WHY BUY A DISK AT ALL?
- Un-DISK should be in the library of every serious CoCo user even if you own a disk says Frank J Esser, independent reviewer for RAINBOW Magazine!

OK sure, disk drives ARE NICE. I own one But if your finances are limited, the Un-DISK can give you much of the power of the mechanical drive Even if you already own a disk the Un-DISK can work like a super fast extra disk

EXTRA . . . EXTRA . . . EXTRA . . . EXTRA . . .
Additional Power For $14 95

Only with VDUMP for the Un-DISK

- VDUMP lets you make a cassette backup copy of everything stored in the Un-DISK
- VDUMP lets you save 5, 10, 15 or more programs on a single cassette tape file
- VDUMP lets you switch Un-DISKs. With a single load operation replace a group of financial programs with a set of children's programs. (The new VDUMP tape overwrites the old)
- VDUMP can allow you to save a whole lot of RAINBOW ON TAPE in a SINGLE file
- VDUMP is the perfect companion to the Preble VDOS Un-DISK

Available from Doctor Preble's Programs, naturally! Bringing you fine Color Computer Products Since 1983!

The Preble VDOS Un-DISK **$34.95**
The Preble VDUMP $14 95
Shipping & handling
U S. and Canada $1 50
or $5 00 to other foreign points

VISA and MasterCard accepted

DR. PREBLE'S PROGRAMS

Order From:
Dr. Preble's Programs
6540 Outer Loop
Louisville, KY 40228
(502) 966-8281
Canadians may order from Kelly Software

Mind-tingling action!

THE SECOND RAINBOW BOOK OF ADVENTURES

Twenty-four of the most challenging Adventure games ever compiled await you in this latest offering from The Rainbow Booksnelf. Journey through time, fight World War III, win the heart of a beautiful and mysterious princess. Experience the titillations of the most rugged Adventurer without ever leaving your seat.

Order The Second Rainbow Book of Adventures and among the 24 program listings you'll receive are:

Yellow Submarine — Meet the Beatles and attempt to outlast the Blue Meanies while enjoying some of the Fab Four's all-time musical hits
Ring Quest — Regain possession of a magical ring and save a kindom.
Time Tripper — Lost in another dimension.
Chief Inspector — Who killed B.L. Brown?
Sir Randolf Returns — The sequel to a favorite from our first Adventure book.
Silverton House — Where's the money been stashed?
Ice Princess — Just one glance at this beauty will steal your heart

Experience other traditional and contemporary challenges from these winning authors Mark Fetherston Jeff Crow, Larry Lansberry, J C. Jackson, Robert W Mangum II, Robert Poppe David Taylor Gregory Clark, Steve Skrzyniarz, David L Dawson, Curtis Boyle, Bruce K. Bell, Pat Pugliano, Pat and John Everest, Mike Fahy, Scott Settembre, Darin Anderson, Robert L Thomas, Terrance Hale, Paul Hensel, Philip Courie, Michael Dennison and Robert Dickau.

The Second Rainbow Book of Adventures sells for only $13.95!

For greater convenience, order the Second RAINBOW Book of Adventures and Adventures Tape through the shopping area of the CoCo SIG at Delphi!

THREE BONUS PROGRAMS
WHEN YOU BUY THE SECOND RAINBOW ADVENTURES TAPE!

That's right. You'll receive a total of 27 fantastic Adventures when you get the Second Rainbow Adventures tape. The three bonus games are Castle Thuudo, by Carmen D. Michele; Halls of Dungeon Death, by Eric and Mark Riel; and Caves of Kalakh, by Jane Fisher — programs with listings too lengthy to include in the book Save yourself hours of typing listings. Load these great Adventures into your computer and run them!

The Second Rainbow Adventures Tape is only $13.95.

The tape is an adjunct and complement to the book. Even if you buy the Second Rainbow Adventures Tape, you'll need the book for the introductory material and loading instructions

Keep your Rainbow Bookshelf up-to-date!
See Page 117 for additional Rainbow Bookshelf offerings.

☐ Please send me The Second Rainbow Book Of Adventures for $13.95*

☐ Please send me The Second Rainbow Adventures Tape for $13.95

Name _____

Address _____

City _____ State _____ ZIP _____

☐ My check in the amount of _____ is enclosed.*

Please charge to my: ☐ VISA ☐ MasterCard ☐ American Express

Account Number _____ Exp Date _____

Signature _____

Mail to: The Second Rainbow Book of Adventures,
The Falsoft Building, P.O. Box 385, Prospect, KY 40059

To order by phone (*credit card orders only*) call 800-847-0309, 8 a.m. to 5 p.m. EST. For other inquiries call 502-228-4492.

*Add $1.50 shipping and handling per book. Outside the U.S., add $4. Allow 6-8 weeks for delivery. Kentucky residents add 5% sales tax for book and tape. In order to hold down costs, we do not bil **U.S. currency *only*, please.**

The Rainbow Bookshelf™

Timing and the SAM Chip

By Tony DiStefano
Rainbow Contributing Editor

As we all know, the CPU in our CoCo is the MC6809E. It is the heart of the computer. It equires RAM and ROM and I/O and 'ideo and so on to help support it. All hese devices must be memory mapped. 'hey must appear somewhere in the 4K bytes of memory the CPU can ccess. The proper timing and sequenc-ng must be within the specifications of he CPU. Normally, a handful of TTL 74 series) logic chips take care of this. n the CoCo one big chip takes care of ll of this and more. The chip is the MC6883, sometimes known as the 74LS783N. The name of this chip is a Synchronous Address Multiplexer or SAM for short. This is a 40-pin chip hat mates the MC6809E and the MC6847 (the video chip). This chip also does all of the dynamic memory refresh .iming and memory mapping of all the other major chips of the CoCo. As you can see, this thing is a real workhorse of a chip. By the time I am finished describing this chip, everyone will have as much respect for it as I do.

Tony DiStefano is well-known as an early specialist in computer hardware projects. He lives in Laval Ouest, Quebec.

The first part of this article is a pinout of this chip. Figure 1 shows the pinout of the SAM chip. The following is a pin-by-pin description of the Motorola chip number MC6883.

Pin 1 to 4 — A11 to A8. Address lines A11 to A8 respectively from the MC6809E. These are four of the 16 address lines the SAM requires to fully control the memory mapping of the CPU.

Pins 5 and 6 — OSCin and OSCout. These are the crystal oscillator inputs. A crystal and supporting components supply the SAM a master frequency of 14.31818 MHz. This is the highest frequency available in the CoCo.

Pin 7 — VClk. The first function of this pin is to generate an output of 3.579545 MHz. This supplies the color carrier for the VDG (Video Dispay Generator) Clk pin. The second function resets the SAM when this pin is pulled to a logic level of 0, acting as an input. In the CoCo, this pin is part of the reset circuitry.

Pin 8 — DA0 (Display Address 0). The function of this pin as described in the Motorola manual is the least significant bit of a 16-bit video display address. The more significant 15-bits are outputs from an internal 15-bit counter which is clocked by DA0. The second function, not used by the CoCo, is to indirectly enter the logic level of the VDG FS (field synchronization pulse) for vertical video address updating.

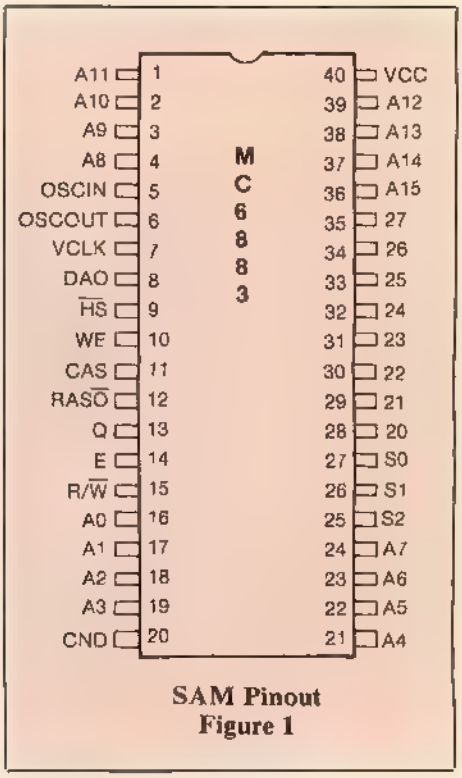

SAM Pinout
Figure 1

Pin 9 — HS. This input, connected to the HS output of the VDG, detects the

falling edge of the pulse in order to initiate eight dynamic RAM refresh cycles. It also resets four least significant bits of the internal video address counter.

Pin 10 — $\overline{\text{WE}}$. This output is the write enable pulse that enables the CPU to write into dynamic RAM.

Pin 11 — $\overline{\text{CAS}}$. This output is the Column Address Strobe. It strobes the most significant 6, 7 or 8 address bits into dynamic RAMs.

Pin 12 — $\overline{\text{RAS0}}$. This output is the Row Address Strobe 0. It strobes the least significant 6, 7 or 8 address bits into dyamic RAMs in Bank 0.

Pin 13 — Q. This output is the Quadrature clock used by the CPU that leads the 'E' clock by about 90 degrees.

Pin 14 — E. This output 'E' clock, bett known as the Enable clock, is used the CPU. It is the main CPU timing a is also used by most peripherial devic This clock determines the speed which the CPU operates.

Pin 15 — R/$\overline{\text{W}}$. This input is fed fro the CPU's R/$\overline{\text{W}}$ line. It tells SA whether the CPU is reading or writi data to memory, writing to the SA registers or device 0.

Pins 16 to 19 — A0 to A3. Address lin A0 to A3 respectively from t MC6809E. These are the next four the 16 address lines the SAM requir to fully control the memory mapping the CPU.

Pin 20 — GND. Return ground for t five volts. Signal ground to which a signals are referenced.

Pins 21 to 24 — A4 to A7. Address lin A4 to A7 respectively from t MC6809E. These are the next four the 16 address lines the SAM requir to fully control the memory mapping the CPU.

Pins 25 to 27 — S2 to S0. S2 is the mo significant bit of the three device sele bits. The binary value of these three pi selects one of eight chunks of CP memory map, device 0 to 7. Varying i length, these chunks provide chip s lects for three ROMS, RAM, three I O areas and boot area; the boot area not used in the CoCo.

Table 1 SAM Control Registers

Address	Mode	Label	Name	Descriptions
FF DF	S	TY	map type	1 = all RAM 0 = ROM/RAM
FF DE	C			
FF DD	S	M1	memory size	00 = 4K 01 = 16K 10 = 64K 11 = static RAM
FF DC	C			
FF DB	S	M0		
FF DA	C			
FF D9	S	R1	CPU rate	00 = slow 01 = dual speed 11 = fast
FF D8	C			
FF D7	S	R0		
FF D6	C			
FF D5	S	P1	page #	SET = PAGE #1 CLEAR = PAGE #0
FF D4	C			
FF D3	S	F6	display offset	start of display address and 512 byte offset
FF D2	C			
FF D1	S	F5		
FF D0	C			
FF CF	S	F4		
FF CE	C			
FF CD	S	F3		
FF CC	C			
FF CB	S	F2		
FF CA	C			
FF C9	S	F1		
FF C8	C			
FF C7	S	F0		
FF C6	C			
FF C5	S	V2	VDG MODE (SAM)	
FF C4	C			
FF C3	S	V1		
FF C2	C			
FF C1	S	V0		
FF C0	C			

	DMA	G6R/C	G3R	G3C	G2R	G2C	G1R/C	TEXT
	1	1	1	1	0	0	0	0
	0	1	0	0	1	1	0	0
	1	0	1	0	1	0	1	0

S = set C = clear

Chunk Name	Mapped Area	Description
S0	$0000 to $7FFF 0 to 32767	This area in a 64K machine is 32K of user RAM.
S1	$8000 to $9FFF 32768 to 40959	This area is occupied by the 8K Extended BASIC ROM chip.
S2	$A000 to $BFFF 40960 to 49151	This area is occupied by the 8K Color BASIC ROM chip.
S3	$C000 to $FEFF 49152 to 65279	Normally this area is occupied by the 8K Disk ROM chip, but this area can access up to 16K.
S4	$FF00 to $FF1F 65280 to 65311	This area is 32 bytes long. Four bytes are used for a PIA to which the keyboard HS, VS and audio select are connected.
S5	$FF20 to $FF3F 65312 to 65343	This area is also 32 bytes long and again only four bytes are used for a PIA to which the VDG controls, D/A, cassette motor, RS-232 and interrupts are connected.
S6	$FF40 to $FF5F 65344 to 65375	This 32-byte area is used with a disk controller to control things like drive select, FDC control and drive motors.
S7	$FF60 to $FFDF 65276 to 65503	This is not used except for the SAM control registers.

Table 2

ns 28 to 35 — Z0 to Z7. These are the ght multiplexed address lines needed access 64K dynamic RAM. With 16K namic RAM, only Z0 to Z6 are used id Z7 is $\overline{RAS1}$ for a second bank of K chips. With 4K dynamic RAM, Z6 not used. These lines are also used to nerate the video address refresh on e alternate 'E' cycle.

ins 36 to 39 — A15 to A12. Address ies A15 to A12 respectively from the IC6809E. These are the last four of the address lines the SAM requires to lly control the memory mapping of ie CPU.

in 40 — Vcc. This pin requires +5 olts. It powers all the functions in this iip.

As you can see from these descriptons, the SAM chip and VDG chip are osely linked. The SAM chip generates ata from its RAM and delivers it to the DG. That is one of the functions of the AM. It works closely with the VDG ionitoring the horizontal and vertical ynes in order to give it the proper data iat the VDG later converts to a video gnal. The SAM has many modes in hich it delivers video data to the VDG. hese modes are selected by a set of egisters in the SAM's memory map. ut since the SAM chip has no data nes going to it, the registers are accessed by writing to odd address locaions to set the register and writing to ven address locations to clear the egister. The data written to these ocations is irrelevant. Table 1 shows all he SAM control registers and their unctions. Most of the registers shown ire used with the VDG.

Pins S0 to S2 are used to decode chunks of memory. These so-called chunks of memory are what memory maps the CoCo into what we know it to be. For instance, BASIC is one chunk that is 8K long. Disk Extended BASIC is another chunk that takes up 16K. These eight chunks are decoded from the three pins by using a 74LS138. You might remember this from a past article, but if you don't, a '138 is a three-input to eight-output decoder; just what the doctor ordered. Each one of these eight outputs controls one chunk of memory. Table 2 shows all eight chunks and describes where in the memory map they appear and what use each has in the CoCo.

In Table 2, notice that part of S7 are the SAM control registers. Table 1 describes the SAM control registers. The SAM control registers are divided into six areas. The following is a description of each of these areas.

The first area is the map type. When cleared, the SAM is in the map type 0. This is the mode that BASIC sets it up to be. The ROMs are active and a maximum of 32K RAM is accessible. When set, the SAM is in the map type 1 This mode is better known as the 64K mode or the RAM mode. In this mode none of the ROMs are active but all 64K RAM is accessible. The OS-9 operating system uses this mode.

The next mode is the memory size. The SAM can use three types of dynamic memory, 4K, 16K and 64K. When your CoCo is first turned on, a routine in the BASIC ROM checks to see what kind of RAM is installed and sets the SAM chip accordingly.

The third mode is CPU rate. The SAM has some control as to the speed at which the CPU can operate. It has three choices; the first is called slow. In this mode the CPU runs at .894 MHz. The next is the dual speed mode. Depending on where the CPU is accessing memory, it can access it at .894 MHz or at the faster 1.78 MHz. At the dual speed, S0 and S4 are accessed at the slower speed, all other accesses are at the higher speed. The third speed is the fast speed. This is where all accesses are done at the high speed, but at that speed, the SAM chip does not have the time to do video. The video screen displays garbage.

The fourth mode is the page mode. When the SAM is in map type 0 and is using 64K memory chips, only *half*, 32K, of memory is used. The other half is just sitting unaccessible. Setting this register switches in the other half of memory and switches out the first half.

The fifth mode area is a big one in that it takes up a lot of room. This is the display offset. This offset tells the SAM chip where in memory to start the video scanning. Since the smallest memory area the SAM can scan is 512 bytes, all offsets are 512 bytes apart. The display offset is a binary address to the start of the video display.

The sixth area is the VDG mode. Since graphics pages take up more memory than text, the SAM has to scan more memory. The amount of memory scanned depends on the graphics resolution mode required. Basically there are three amounts of graphics memory. The first is 1.5K memory, the second is 3K and the highest is 6K. These modes of graphics must match the graphics mode the VDG is set to. You will find more detail on these modes in the BASIC manual supplied by Radio Shack.

The last mode is reserved for future use. Who knows what Motorola has in store for these unused registers.

The SAM chip is a very complex chip, indeed. I have just described only the major parts of this chip. Complete details on this chip are available from your Motorola dealer. The details I have given are taken from that manual and the TRS-80 Color Computer Technical Reference Manual, available at your local Radio Shack store.

ASSEMBLY LANGUAGE PROGRAMMING for the TRS-80 COLOR COMPUTER

At last - The book exclusively for you and your CoCo !! You've learned BASIC and are now ready to learn assembly language programming. This hands-on guide begins with the basics and progresses to the expert level; revealing programming conventions and techniques and all the internal capabilities of the TDP-100, CoCo 1 and 2. At every step of the way are illustrations, sample programs, and plain English explanations. All sample programs are shown as assembled with Radio Shack's EDTASM+ cartridge. Plus, a complete chapter explains how to use all EDTASM+ capabilities. This book describes how to write subroutines, interrupt handlers, programs that control the graphics display modes, cassette, disk, keyboard, sound, joysticks, serial I/O, interrupts, and use of ROM resident subroutines. Also covered are the MC6809E microprocessor, the video display generator (VDG), peripheral interface adapters (PIA), SAM, memory, and how they all work together. Suitable as a high school or college textbook.

CHAPTERS: The Binary Number System - Memory and Data Representation - Introduction MC6809E Microprocessor - Addressing Modes of the MC6809E MC6809E Instruction Set - Assembly Language Programming with EDTASM+ - Assembly Language Programming - Assembly Language and Extended Color BASIC - Internal Control and Graphics - Technical Details.

289 pages
soft cover

TRS-80 & EDTASM+ are trademarks of Tandy Corp

$16.00 U.S. plus $1.50 shipping. Check or money order. RI residents please add 6% sales tax. Inquire about volume discounts.

Published and sold by

TEPCO
30 Water Street
Portsmouth, RI 02871

PIPELINE

LOCK IT TIGHT Technalock is a low-cost way to secure movable equipment from theft. Pressure-sensitive adhesive bonds the securing plates to the equipment while a vinyl-coated steel cable and lock completes the system. The kit can be used for applications other than computer equipment; stereos, toolboxes, outboard motors and many other items can be protected as well. The master system sells for $24.95 and expansion kits are available. ***Contact Business Security Systems, 512 South Hanley, St. Louis, MO 63105, (314) 962-4446.***

POWER PLAY Ohm/Electronics recently introduced the Scooter(R) Model SP5G Guard-It™ Control Center for personal computers. The SP5G provides five protected and switched outlets. LED indicators show the status of the main power, computer and monitor outlets. The unit protects against noise, voltage surges and spikes. A resettable circuit breaker completes the front panel. The thin, modern cabinet, which emulates the look of the IBM PC and clones, features an attached swivel base. Suggested retail price is $98.95. ***Contact Ohm/Electronics, 746 Vermont Street, Palatine, IL 60067, (800) 323-2727. In Illinois, call (312) 359-6040.***

PICKS FOR YOUR POCKET Specialized Systems Consultants Inc. has announced its latest edition to its line of pocket references. The *Text Processing Reference* is a guide to UNIX word processing tools and includes coverage of the mm macros and the tbl, eqn, nroff and troff commands. The 32-page guide sells for $6. Other pocket references offered by SSC are *UNIX Command Summary*, *C Library Reference for Standard System V*, *MS-DOS Command Reference*, *FORTRAN 77 Reference* and the *VI Reference*. ***Contact Specialized Systems Consultants Inc., P.O. Box 55549, Seattle, WA 98155, (206) 367-UNIX.***

IMPROVEMENTS Tandy Corporation has announced that consolidated sales and operating revenues for the month of May were $245,108,000. This is an increase of 12 percent over the May 1985 revenues of $219,074,000. Tandy's U.S. retail operations recorded a 10 percent May gain over that same period in 1985. In May 1986, recorded sales and revenues for U.S. retail operations were $195,414,000 while May 1985 sales were reported to be $177,112,000. Revenues from U.S. stores in existence more than one year increased slightly in May 1986. Keep it up Tandy!

ADDITIONS Black Box Corporation has issued the second edition of its personal *Black Box*(R) *Catalog*. The new catalog offers 20 percent more items than the previous issue. New product lines include data acquisition products, software to serve as management tools and several reference books on the personal computing field. Also included in the 88-page, full-color catalog are cables, switches, test equipment, tools, modems, spoolers, protocol converters and terminal emulation boards. Subscription to the catalog is available at no charge by writing: ***Personal Black Box(R) Catalog, P.O. Box 12800, Pittsburgh, PA 15241, or by calling (412) 746-5500.***

NO MORE STICKY DISKS Weber & Sons Inc. has found a method of labeling diskettes. The NoLabelSystem(c) is a permanent label way to organize and identify floppy disks. Instead of peeling off old labels and affixing new ones, you affix a clear plastic pocket to the disk and slide in an insert card with the appropriate information on it. To rename the disk, just slide in a new card. Included in the NoLabelSystem(c) are: 100 plastic pockets, 100 white and 100 color insert cards. The tabs on the insert cards stick out of the pockets for easy removal. Sizes are available for 3½-inch, 5¼-inch and 8-inch diskettes. Th kit is $19.45 plus $3 shipping. Catalc numbers are: NLS-3.5-100, NLS-5.2: 100 and NLS-8-100. A test packag containing 25 samples of each item also available for $6. ***Contact Weber Sons Inc., NLS Dept., 3468-2 Hwy ! Freehold, NJ 07728, (800) 225-0044.***

WANT TO GO OUT? Internation Resource Development Inc. has give us some insight into the future of datin The firm is predicting that by 199 singles bars around the world will b equipped with computerized card reac ers to help their customers meet "com patible" companions. According t Matthijs Moes, who led the study effor customers will carry special identifica tion cards — about the same size a credit cards — and the terminal/reader in the bars will read the informatio into a small computer. The compute will compare personal attributes an indicate to the customer who else in th bar might have compatible interests The customer will have to take it fron there. The cards will give a whole nev meaning to the term "personal" compu ter, says Moes.

On a related note, IRD says medica cards, similar to the dating cards, wil be introduced first. These cards wil contain all-important medical histories of the carrier. This information will help in processing insurance claims and more importantly, speed necessary attention to the ill. Blue Cross/Blue Shield of Maryland announced last year that it had given Canon a contract for $40 million to produce some 60,00(reader/writer terminals over a five-year period.

EXPERIMENTER'S DELIGHT OWI Inc. has expanded its Movit family of educational robot kits to include the WAO. This robot is designed to teach the fundamentals of computer programming (e.g. flowcharts), perform graphics and develop an awareness to robotics. WAO has an internal microcomputer chip. The system stores a program in ROM (2K) and will store a user program in RAM (128 x 4 bits). With its built-in RS-232 interface, the WAO is ready to communicate with most personal computers. WAO is sold in kit form and requires assembly. The electronics, however, come preassembled and tested. Suggested retail for WAO is $99.95. ***Contact OWI Inc., 1160 Mahalo Place, Compton, CA 90220, (213) 638-4732.***

256K **SUPER RAM** 512K

HOME RUN!

➡ 256K Bd - $129.95
➡ 512K Bd - $169.95*
(Requires RS Multi-Pak)

OS-9 DRIVER $24.95

The first 256K/512K memory bd for the CoCo II ! Inside this low noise metal case lives 256K/512K of memory and all the circuitry to access it as a RAMDISK ! Compatible w/all CoCo II's even 26-3127B & 26-3134A/B (see June '86 Rainbow Review)
*Recommended for OS-9 users !

10 MEG **SUPER DISK** 20 MEG

GRAND SLAM!

☆☆☆☆☆☆☆☆☆☆

Tony Di Stefano (Turn of the Screw Guru) has done it again ! ! ! Coming soon is SUPER DISK - a HARD DRIVE adapter that will fit inside the Super Controller or Super Ram. It will be able to access one or two FIVE, TEN or TWENTY MEGABYTE Hard Disk Drives. Write for more exciting details !

COMING... SUPER COPY ! ! !

256K **THUNDER RAM** 256K

STRIKE 1 - RAM!

(NOT available for CoCo II's)

☆☆☆☆☆☆☆☆☆☆
☆ Thunder Dupe 2 - Format & Backup a FULL diskette (68 grans) in ONE PASS! Up to 4 Disk Drives!! $24.95 ☆
☆☆☆☆☆☆☆☆☆

OS-9 DRIVER $24.95

The first 256K memory Bd for the CoCo! Load four 32K pgms at once, emulate a 40trk RAMDISK, 60K Print Spooler, FAST access, 30+ Hi-Res screens in memory!! $99.95 (see Sept '85 Rainbow Review)

DOUBLE RAM - Upgrades a THUNDER RAM from 256K to 512K giving TWO independent RAM Disks! $79.95

SUPER CONTROLLER

STRIKE 2 - DOS!

Uses 2764 ($6.95) or 27128 ($14.95) EPROMS !

EPROM Programmer $59.95 (Requires Super Controller)

The most AMAZING CoCo Disk Controller ever! Switch up to 4 DOS's (up to 16K) via a single software POKE! Choose between R/S 1.0/1.1, Spectrum DOS, ADOS, JDOS, Stearman DOS - $99.95

Spectrum DOS $29.95 and/or ADOS $39.95 w/purchase of Super Controller (Buy 'em both for $59)

Enhanced Display 80 - Add an 80x24 display, Real Time Clock & Centronics Parallel Printer interface to your Super Controller ! Includes SMOOTH SCROLLING & Switchable Video Input !! $129.95
NEW! OS-9 Driver for Display 80 $24.95

NEW VERSION **COCO MAX II** NEW VERSION

STRIKE 3 - A HIT!

Feature packed hardware & software Graphics System! Includes: Pull-Down Menus, Icon processing, multiple Font styles, full graphic editing plus a special Input Module for 256x192 joystick input.
64K DISK $79.95 w/Y-Cable $99.95
Requires Multi-Pak or Y-Cable ($29.95)
CoCo Max I - II Disk Upgrade - $19.95
CoCo Max (TAPE) $69.95 Mouse Pad $14.95

SPECTRUM PROJECTS, INC.
PO BOX 21272
WOODHAVEN NY 11421

Mail or Phone
Shipping $3.00 (Foreign $5.00)
COD $2 extra - NY Res add tax
COD Order Line 718-835-1344

SPECTRUM PROJECTS

SOFT AND HARD WARES FOR COLORFUL COMPUTING

COMMUNICATION

COLORCOM/E – A complete smart terminal package! Upload, Download, Hi-Res (51X24) screen, 300/1200 Baud, Offline Printing, 32/64K Disk* – $39.95
*– Now with DELPHI & Compuserve XMODEM support! Download ML!
COMPUSERVE 5hr Start Kit $19.95

SAVE $20 ! Get CC/E TW-64 TELEPATCH for only $99.95

BUY BOTH → SAVE $10

WORD PROCESSING

TELEWRITER 64 – Three Hi Res screens, true lowercase char's right justify, full screen editor. Tape $49.95 Disk $59.95
TELEPATCH – A TW 64 enhancer!!! True block move, Overstrike & TSPOOL mode, Type Ahead Buffer FASTER Disk I/O 64K Disk $19.95

MODEMS

1200 BAUD
$129.95**

Hayes compatible! Super for the DELPHI & Compuserve CoCo Sig! 300/1200 Baud, Auto-dial/answer
** Requires Modem cable .$19.95

PRINTERS

GEMINI NX-10 – 120 cps, tract-frict feed, NLQ mode, 5K buffer Front Panel Controls! – $249.95
KAMELEON –Low cost Parallel Ptr Interface! 600/9600 Baud $49.95
BriteFace–The first INTELLIGENT Ptr Interface! All Baud rates with NO switches to turn $59.95

KEYBOARDS

RS 26-3016 Low Profile CoCo Keybd, Fits all CoCoII's, "F" & TDP-100's WAS $39.95 NOW $14.95
Adapter for D/E CoCoI's – $9.95



Monitor Stand $24.95

MONITORS

MONOCHROME Monitors – CRISP 80x24 Hi-Res screens! $79.95
Universal Video Driver – Works w/all monitors & CoCos!– $29.95
Anti-Glare Screen $24.95
13" COLOR Monitors $169.95
TAXAN Tuner-Receive TV channels on any composite monitor $99.95

SAVE $10 OFF COLORCOM/E WITH A HAYES MODEM
OFF TELEWRITER-64 WITH ANY PRINTER, KEYBOARD OR MONITOR **SAVE $10**

SPEEDY COD ORDER HOT LINE – CALL 718-835-1344

SPECTRUM PROJECTS

SOFT AND HARD WARES FOR COLORFUL COMPUTING

SPREADSHEET

	Competition	DYNACALC
Screen	32X16	51X24
Precision	9 digits	16 digits
Hi-Res Graphics	NO	YES
Visicalc cmd format	NO	YES

New low price! 64K Disk $69.95
Side Wise -Print DYNACALC files up to 255 chars-sideways! $24.95

NEW LOW PRICES FOR '86

BUY 'EM BOTH FOR
DYNACALC & PCF 2.0 ONLY!
$99.95

DATA BASE MANAGER

PRO-COLOR FILE 2.0 - 60 Data Flds, 8 Report Fmts, 4 Screen Fmts, 1020 bytes/record, Sort 3 Fields, Global Search, FAST ML Sort, Create Files Compatible w/DYNACALC! - Disk $49.95
Pro Color Dir and PCF Forms - Buy 'em both for only $29.95

DISK DRIVES

DOUBLE SIDED DRIVE Ø
$239.95*

Disk Drive - 1,2 or 3 - $119.95
* Super Controller-Manual-Cable



GAME CONTROLLERS

Wico Command Adapter - Now you can hookup 2 Atari type joystks to your CoCo for only $19.95!
Wico Trackball-Rapid fire & 360° action! Reg. $69.95 - Now $19.95
DELUXE Joystick - 360 Degree control with center return or analog positioning - $27.50

DISK SOFTWARE**

1. Fast Dupe II $14.95
2. CoCo Keybd Software ..$14.95
3. Wizard (TW-64) $19.95
4. EZ Base (Database) ...$24.95
5. Graphicom $24.95
6. Blackjack Royale $24.95
7. Color Forth $24.95
8. Spect'm Adv Generator $29.95

COCO II UPGRADES

Want to upgrade your new $69/$88 CoCo II? (See below !!)
4464 DRAMs - two chip 64K upgrade for 26-3134A and 26-3134B Korean CoCo II's ..$39.95
Extended BASIC - 28 pin ROM for 26-3134 A/B CoCo II's ...$34.95
Buy 'em BOTH for only - $69.95

**- SAVE $100!!! Buy the ABOVE 8 programs for only $79.95

SPECTRUM PROJECTS, Inc.
PO BOX 21272
WOODHAVEN NY 11421

FREE - Send for our CoCo catalog flier !!! Dealer inquiries invited ! Software submissions welcomed !

All orders plus $3.00 S/H (Foreign $5.00) - COD add $2.00 extra - NYS Residents add Sales Tax

With this handy joystick port switchbox, CoCo can pull off . . .

THE OLD SWITCHEROO

By Mark Haverstock

The Color Computer owner has a multitude of control devices to choose from. Several varieties of joysticks, trackballs, touchpads and mice are available to help us draw, play and create. However, the Color Computer can only accommodate one device at a time in each of its joystick ports. Likewise, the hardware component of the popular graphics program *CoCo Max* only offers a single plug-in socket.

If you've ever had to reach behind the computer to plug and unplug joysticks, or have wanted to change drawing devices in *CoCo Max*, you'll appreciate the Stick Switcher. Armed with a few parts and tools, you can build this convenient switchbox for selecting up to three different devices on one joystick port. An off positon is also included. It allows all the control devices to be disconnected from the joystick port.

Mark Haverstock is an English and reading teacher for the Boardman Schools in Youngstown, Ohio, and is involved in computer and media projects at the middle school level. His hobbies include computing, photography and amateur radio.

Figure 1: Layout for Drilling Box (to scale)

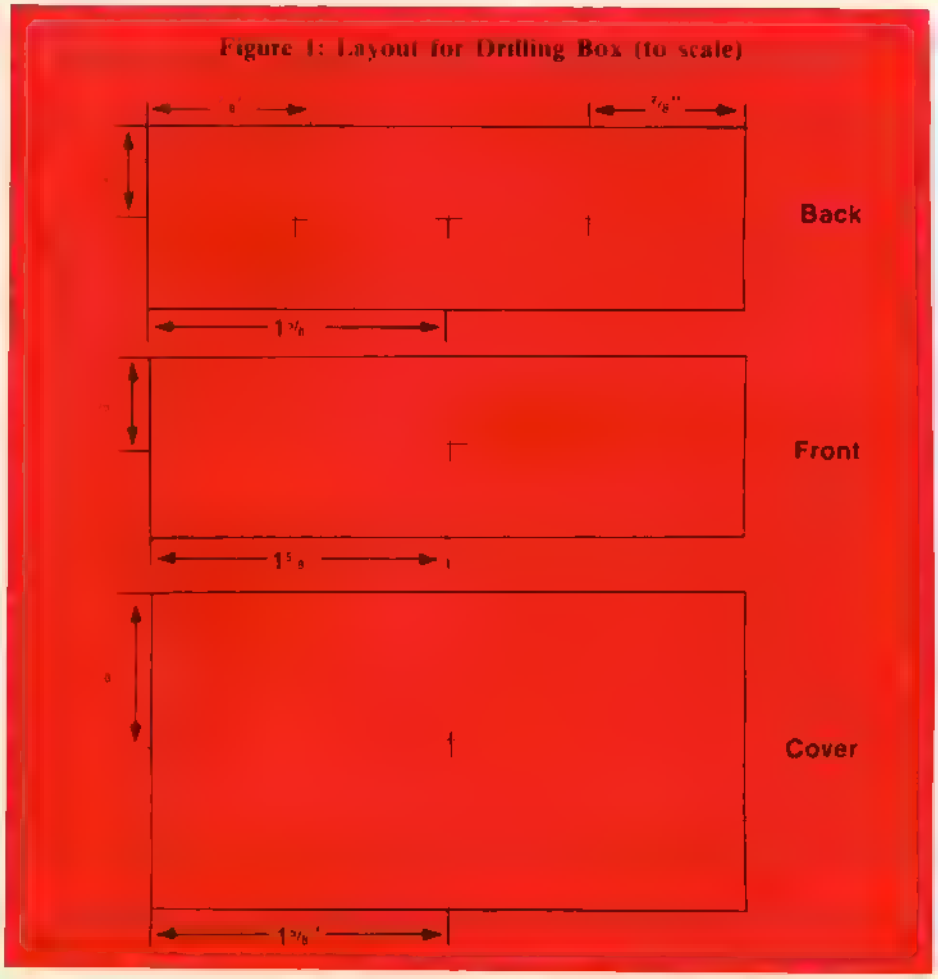

A SPECTRUM PROJECTS SHOPPING LIST

SUMMER CHIP -SALE- ...

821 Standard PIA ~~$9.95~~ $4.95
8) 4416 16K Chips - 5 volts $4.95
asic ROM 1.1 Chip ~~$19.95~~ $7.95
rig SAM Chip (6883) ~~$19.95~~ $9.95
847 VDG Chip ~~$19.95~~ $9.95
809E CPU Chip ~~$19.95~~ $9.95
822 Industrial PIA ~~$14.95~~ $9.95
asic ROM 1.3 (Newest version) ...$19.95
8769 (Fits all Basic ROMS) EPROM $19.95
isk ROM 1.1 (New DOS Command) ...$29.95
ew SAM Chip w/heatsink (74LS785) $29.95
xt Basic 1.1 ROM - NEW LOW PRICE $29.95
oCo First Aid Kit - includes 2 PIAs, 809E CPU & SAM Chips ~~$59.95~~ $29.95
prom Eraser - 3 min erasure time $49.95
prom Prgmr (2ms speed/2K-16K) ..$149.95
andy1000 512K Upgrade-SAVE $350 $169.95

COCO LIBRARY...

A History of the CoCo / 1980-1986 .$3.95
CoCo Memory Map $14.95
Basic Programming Tricks Revealed.$14.95
500 Pokes, Peeks 'N Execs $16.95
Basic 09 Tour Guide $19.95
Assembly Language Programming $19.95
Color Basic Unraveled $19.95
Extended Basic Unraveled $19.95
Disk Basic (1.0/1.1) Unraveled ...$19.95
New! CoCo II Service Manual* $24.95
SECOND Book & Tape of Adventures .$29.95
Official OS9 Manual Set $39.95
The Complete Rainbow Guide to OS9.$19.95
W/Two Disk Package of demo pgms ..$49.95
Color/Extended/Disk Basic Unraveled - Complete disassembly of the CoCo ROMS! Complete 3 Book Set - Save $10! ..$49.95

MORE GOOD STUFF...

CoCo Light Pen - ~~$24.95~~ Save $5!..$19.95
Computize "Y" Box - More positive connections than a "Y" Cable $29.95
PBJ WORDPAK-RS - Newest version ! HiRes 80x24 display. Comes w/OS-9 drivr $99.95
Micro Works DS-69A Digitizer $149.95
Tandy 1000 2nd Drive (SAVE $40) .$159.95
* - Specify CoCo II Catalogue Number

All orders plus $3.00 S/H (Foreign $5.00)
COD add $2.00 extra
NYS Residents add Sales Tax

COCO CABLES AND...

Printer/Modem 15' Extender Cable .$14.95
Tired of unplugging devices from your RS232 port? Try a RS232 "Y" Cable.$19.95
Disk Drive Cable (34pin - 34pin) .$19.95
Modem Cable - 6ft (DB25-DB25) $19.95
Joystick/Mouse 10' Ext Cable $19.95
Dual Disk Drive Cable (3-34pin) ..$24.95
Null Modem Cable - 4 pin to DB25 .$24.95
Disk Interface/Rom Pak Extender - Move your disks/ROM Paks further away .$24.95
40 Pin Dual "Y" Cable - Hook up a Disk w/Voice, Word Pak, CoCo Max,etc ..$29.95
Triple RS232 Switcher - Now select one of any three RS232 peripherals ...$39.95
40 Pin Triple "Y" Cable - Hook up any 3-Voice/Word/RS232/Digitizer PAKs ..$39.95
RS Multi-Pak Extender ~~$39.95~~ $27.95

OTHER GOOD STUFF...

C-10 tapes in any quantity .....49 cents
5 1/4" Diskettes, any quantity .99 cents
OS-9 Quick Reference Guide $3.95
Rompak w/Blank PC Brd-27xx series .$9.95
CoCo Keybd Adapter - Convert 26-3016 & 277-1019 keybds to D/E CoCo's! ...$9.95
Video Clear - This cable will reduce TV interference created by CoCo! $19.95
The Magic Box - Load Mod I/III Basic program tapes into the CoCo $24.95
DOS Switcher - Select from any two DOSs (Disk 1.0 1.1, JDOS) in J&M ctlr .$24.95
Orig CoCo! "D" Rev motherboard. Includes all chips (SAM, CPU, PIA's, VDG) except RAM and Ext Basic ! Spare Parts ! $29.95
HJL-57 Keyboard - Save $7.00!!! ..$72.95
——— Specify Model/Revision Board ———
HDS Controller w/1.1 ROM $79.95
EARS-CoCo's first Voice Recognition unit w/95% accuracy & 64 Voice Prints! $99.95

SPECTRUM PROJECTS
PO BOX 21272
WOODHAVEN NY 11421

COD ORDER HOT LINE
718-835-1344

SPECIAL 64K RAM CHIPS $19.95

COLORFUL UTILITIES

COCO CHECKER*

Something possibly wrong with your CoCo??? CoCo CHECKER is the answer! Will test your ROMs, RAMs, Disk Drives & Controller, Printer, Keyboard, Cassette, Joysticks, Sound, PIAs, VDG, Internal Clock Speed, Multi-Pak Interface and more!! 16K TAPE/DISK **$19.95** (see Jan '85 Rainbow Review)

MULTI-PAK CRAK

Save ROMPAKs to your 64K Disk system using the RS Multi-Pak Interface. Eliminate constant plugging in of ROMPAKs now by keeping all your PAK software on disk. Includes POKEs for "PROBLEM" ROMPAKs- including the NEW 16K PAKS! (Demon Attack,Dragons Lair,etc) 64K DISK **$24.95**

TELEPATCH II

NEW!

All the FEATURES of TELEPATCH plus the classically proportioned characters of the WIZARD ($19.95) font w/TRUE lowercase descenders! Get BOTH & SUPERCHARGE your TW-64 for only **$29.95**

SPIT 'N IMAGE

A super upgrade from Disk Omni Clone! Back everything up! This amazing program handles "non standard" disks with ease. We haven't found any disk yet that it can't handle. Don't ever be caught without a backup again! Lowest price too! Beats most "copy protection" programs! 32K DISK **$29.95**

COCO SCREEN DUMP

The best screen dump program for the Panasonic, Epson & Gemini printers ever! Have the option of standard or reverse images w/regular or double sized proportional pictures. 600-9600 Baud too! A must for Graphicom and CoCo Calendar users. 16K TAPE/DISK **$19.95** (see Nov '84 Rainbow Review)

DISK UTILITY 2.1*

A multi-featured tool for USER FRIENDLY disk handling. Utilize a directory window to selectively sort, move, rename and kill file entries. Lightning fast Disk I/O for format, copy and backup. Examine contents of files, the Granule Table, plus the size, load addresses and entry points of all programs. Single command execution of both Basic and ML programs. 32K/64K DISK **$24.95** "Disk Utility has proven itself very quickly at my house" - Ed Ellers Oct '84 Rainbow Review pg. 220

SPECTRUM FONT GENERATOR

Now you can write files using any CoCo Word Processor (Telewriter-64, VIP Writer, etc.) and convert them to special Highly Detailed character sets! Some of the character sets supported are Italics, Old English, Futuristic and Block. A character set editor is included to create custom sets or modify existing ones! Supports most dot-matrix printers! DISK **$29.95** (see Dec '85 Rainbow Review)

SPECTRUM DOS

Add 24 NEW Disk commands with 2 Hi-Res screens! Supports 40 track & Double-Sided drives, 6 ms stepping, auto disk search, error trapping & "EPROMABLE". 64K DISK ~~$49.95~~ New LOW price!! **$24.95**

SCHEMATIC DRAFTING PROCESSOR

Save time and design pro looking diagrams using a 480X540 pixel worksheet w/6 viewing windows. Over 30 electronic symbols w/10 definable symbols. (Even Logic gates & Multi pin chips!) Print hard copy and save to disk. 64K DISK ~~$49.95~~ New LOW price!!! **$29.95** (see Jan '84 Rainbow Review)

BASIC+

Basic+ provides (23) of the most used BASIC cmds w/one keystroke plus scrolling & editing w/single key! Also included is a 32 character typahead BUFFERED keybd w/auto key & repeat plus a 32K Print Spooler & Ptr Echo!! 64K DISK **$29.95** (see Jan '86 Rainbow Review pg. 192)

COCO CHECKBOOK

Use your CoCo to keep track of your checking and savings accounts! Printout individual personal checks! 32K/64K TAPE **$19.95** DISK **$29.95** (see Apr '85 pg. 210 & Oct'85 pg. 197 Rainbow Reviews)

THE ULTIMATE GRAPHIC ADVENTURE

NEW!

Wizard's Castle is a graphic adventure game with deadly creatures, magic spells and traps of all types which are RANDOMIZED at the beginning of each session so that no 2 adventures will be the same! REAL TIME ACTION keeps the game's characters interacting even though you may be waiting to make a move. Includes three skill levels, 60 Hi-Res screens & Game Save Feature. 64K DISK **$24.95**

BUY ANY 5 PROGRAMS GET A DOUBLE SIDED DRIVE 0 FOR $199.95
NO OTHER DISCOUNTS CAN BE APPLIED

*NOW AVAILABLE BY EXPRESS ORDER AT YOUR LOCAL RADIO SHACK STORE!!! ASK TO SEE THE RADIO SHACK DEMO DISKS - FC#0249 & FC#0919!!!

COLORFUL UTILITIES

NEW!

COCO TEXT UTIL

Includes utilities that most CoCo word processors (TW-64, VIP Writer, etc.) leave out! Reset margins to correct length for uploading, convert all UPPER CASE text to mixed upper/lower, display total BYTE count, EASY rename & kill functions! DISK **$19.95** (see May '86 Rainbow Review)

COCO VIDEO TITLER

Start your VCR tapes with dazzling title frames followed by professional countdown to black fade-outs! Use a title page editor with several sizes of text & background colors! 32K TAPE **$19.95**

PENPAL

It's here! CoCo's answer to 1-2-3! PENPAL combines Word Processing, Communications, Graphics, Data Base & Spread-sheet into a single integrated software package! 64K DISK INTRO PRICE **$69.95**

64K DISK UTILITY PACKAGE

Take advantage of an expanded 64K machine. Make an additional 8K of RAM available by relocating the Ext Basic ROM from $8000 to $D800. Copy ROMPAKS to disk (even "protected" PAKS) and create a 32K SPOOL buffer for printing. DISK **$24.95** (see July '83 Rainbow Review)

TAPE/DISK UTILITY

A powerful package that transfers tape to disk and disk to tape automatically. Does an automatic copy of an entire disk of programs to tape. Ideal for Rainbow On Tape to disk. Also copies tape to tape & prints tape & disk directories. TAPE/DISK **$24.95** (see Sept '83 Rainbow Review)

NEW!

SUPER DUPER UTILITIES

Finally! At last! A "SUPER DUPER" utility software package all rolled up into ONE!!! Includes such great utilities as: CoCo Disk Zap, Disk Encryption, Disk Mailing List, EZ Disk Master, Graphics ZOOM, Banner Creator, Function KEYS, Super INPUT/LINEINPUT, Basic Program PACKER, Alpha Directory, Basic SEARCH and much, much more!!! 32K DISK **$29.95** (see June '86 Rainbow Review)

COCO CALENDAR

Get organized for '86 TODAY with the CoCo Calendar! Designed for recording the entire year's occassions and daily appointments so you can plan ahead. You can store HUNDREDS of entries and our GRAPHIC Calendar will show all MEMOS! 32K DISK **$19.95** (see Mar '86 Rainbow Review)

THE OS-9 SOLUTION

NOW, a program that creates a "USER FRIENDLY" environment within OS-9! The OS 9 SOLUTION replaces 19 of the old "USER HOSTILE" commands with single keystroke, menu driven commands. No more typing in complex long pathnames or remembering complicated syntaxes! Set all XMODE parameters at the touch of keys! ~~$39.95~~ New LOW price!!! **$24.95** (see Sept '85 Rainbow Review)

COCO-UTIL

Now you can have the power to easily transfer Radio Shack Color Computer disk files to your MS-DOS machine - including the Tandy 1000 & IBM PC!!! You can also transfer MS-DOS files to your CoCo disk, even format CoCo disks! CoCo Util will save you countless hours of retyping! No need to move your computer or printer anymore! Requires 128K MS DOS computer w/2 disk drives - **$29.95**

NEW!

SOFTWARE BONANZA PACKAGE

Create an instant library of Spectrum Projects TOP Colorful Utility software. Select any of the following 12 programs to customize your own SPECTACULAR SOFTWARE BONANZA! CoCo Checker, Multi-Pak Crak, CoCo Screen Dump, Disk Utility 2.1, Spectrum Font Generator, Tape/Disk Utility, Fast Dupe II, 64K Disk Utility, Spectrum DOS, CoCo Calendar, Schematic Drafting Processor, OS-9 Solution, Graphicom, EZ Base or Blackjack Royale (a $300 plus value) for only **$99.95!!!**

SPECTRUM PROJECTS
PO BOX 21272
WOODHAVEN NY 11421
COD ORDER HOT LINE 718-835-1344

This is particularly important for programs that are adversely affected by having joysticks plugged in during operation.

You will need the following parts: One 6-pin DIN plug, #274-020; three 6-pin inline DIN jacks, #274-021; an experimenter box, #270-2301; a two-pole, six-position switch, #275-1386; one knob, #274-407; five feet of five-conductor stranded wire; dry-transfer lettering; epoxy; and electrical tape or shrink tubing.

The tools needed include: a drill, ¼-inch and ⅜-inch drill bits, flat metal file, small screwdriver, small Phillips screwdriver, wire strippers, pliers, soldering iron and solder, and a hacksaw.

Figure 2: Switch

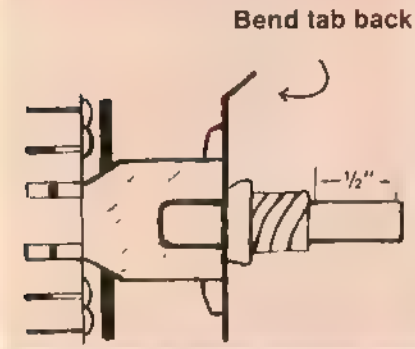

Construction

First, take the metal cover off the project box by removing the four Phillips screws at each corner. Mark the positions of the holes to be drilled on the plastic bottom of the box (see Figure 1). Then drill these holes using the ¼-inch drill bit. Use the file to remove any burrs from the inside of the box.

Mark the position of the switch mounting hole on the metal cover. Drill this hole using a ⅜-inch drill bit. Again, remove any burrs from the rear of the cover. To mark the switch positions on the box cover, you need to temporarily install the switch and knob. Prepare the switch by sawing off all but a half inch of the shaft. File the rough edges after cutting. Find the locking tab and bend it down so it is even with the top surface of the switch (see Figure 2). Mount this switch on the metal cover using the hardware provided and tighten gently with the pliers. Then attach the knob to the switch shaft. Rotate the knob, marking positions 1, 2, 3 and off lightly on the cover with pencil. After these have been marked, remove the switch and knob. Apply the dry-transfer lettering at these positions.

Figure 3: Plugs/Jacks Wiring (rear view)

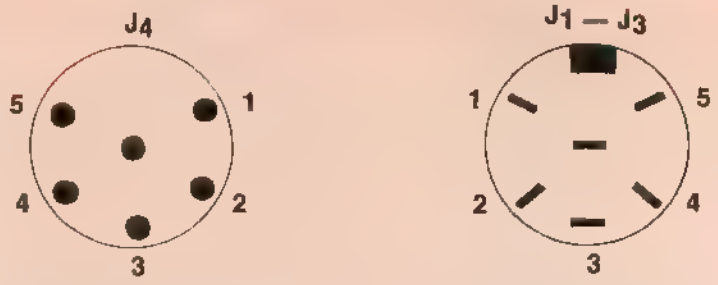

274-020 Plug

274-021 Inline Jack

The next step is to wire the cables and jacks. If five-conductor cable is not available in your area, substitute five #22 gauge stranded wires twisted together, or use the wire from an old broken joystick. Prepare one 36-inch and three five-inch cables by removing one inch of the outer jacket and stripping ¼ inch of insulation from each individual wire at both ends. Remove the covers from the jack and plugs and solder these wires as shown in Figure 3. Before replacing the covers, be sure to inspect the solder connections for shorts.

Figure 4: Switch Wiring Diagram

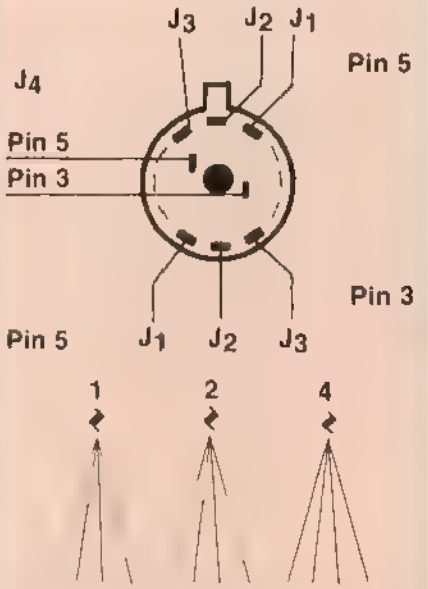

Match remaining wires from pins 1, 2 and 4. Twist each group together, solder and insulate with electrical tape.

Insert the remaining ends of the wires from the plugs into the three holes in the rear of the project box and the wire from the jack into the front. Wire the switch according to Figure 4. Note that only two of these lines will be switched: the +5V and ground lines. The others will be matched, soldered together and covered with electrical tape or hea shrink tubing.

To secure the wires attached to J1-J and keep them from pulling out of th box, apply a small amount of epoxy a the point where these wires enter th inside of the box. Allow the epoxy t

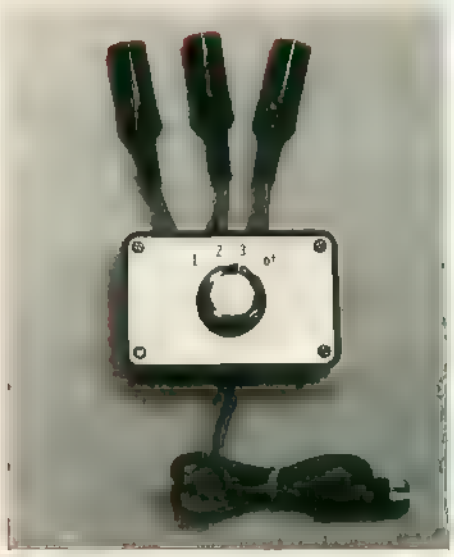

dry thoroughly before going to the next step.

Fasten the switch to the metal cover and align the knob with the positions marked on the metal cover. Be aware that only the first four positions of the switch will be used.

Finally, reassemble the box, being sure to tuck the wires carefully inside. As a finishing touch, you may want to cover the dry-transfer letters with clear nail polish to keep them from rubbing off. To test, simply plug the switcher into a joystick port and add your joysticks or other control devices in positions 1, 2 and 3. You can now enjoy the convenience of switching without unplugging.

(Questions about this project may be directed to the author at 6835 Colleen Drive, Youngstown, OH 44512. Please enclose an SASE for a reply.)

HOW DO YOU TOTE A RAINBOW?

It's simple — Give a RAINBOW gift certificate . . .

Let a gift subscription to THE RAINBOW carry the premier Color Computer magazine right to your friends' doorsteps. THE RAINBOW is *the* information source for the Tandy Color Computer.

Each month, your friends will enjoy the intelligent programs, reviews and articles written exclusively for their CoCo.

First, your gift will be announced in a handsome card. Then, all year round, they'll remember you and your thoughtfulness when they get each edition of THE RAINBOW — over 250 pages loaded with as many as 24 programs, 15 regular columns and lots of helpful hints and tips.

Generosity benefits the giver, too. There'll be no more searching for lost copies of THE RAINBOW. Your collection will be safe at home.

Give a RAINBOW gift certificate and let your friends in on the fun. THE RAINBOW is the perfect companion for the Color Computer!

Please begin a one-year (12 issues) gift subscription to THE RAINBOW for:

Name _____

Address _____

City _____ State _____ ZIP _____

From:

Name _____

Address _____

City _____ State _____ ZIP _____

☐ My payment is enclosed

Bill to: ☐ VISA ☐ MasterCard ☐ American Express

Acct. # _____ Exp. date _____

Signature _____

Mail to:
Rainbow Gift Certificate, The Falsoft Building, P.O. Box 385, Prospect, KY 40059

For credit card orders call (800) 847-0309, 8 a.m. to 5 p.m. EST.
All other inquiries call (502) 228-4492.

Subscriptions to THE RAINBOW are $31 in the United States, U.S. $38 in Canada. The surface rate to other countries is U.S. $68; the air rate, U.S. $103. Kentucky residents add 5% sales tax. **U.S. currency *only*, please.** All subscriptions begin with the current issue. Please allow 6 to 8 weeks for delivery. In order to hold down non-editorial costs, we do not bill.

The CoCo Gallery

1st PRIZE

Todd Larsen
Where Worlds Meet
Parallels of planets through a saw-toothed fracture initiate this month's gallery. Todd lives in Mobile, Alabama, and created his worlds with *McPaint*.

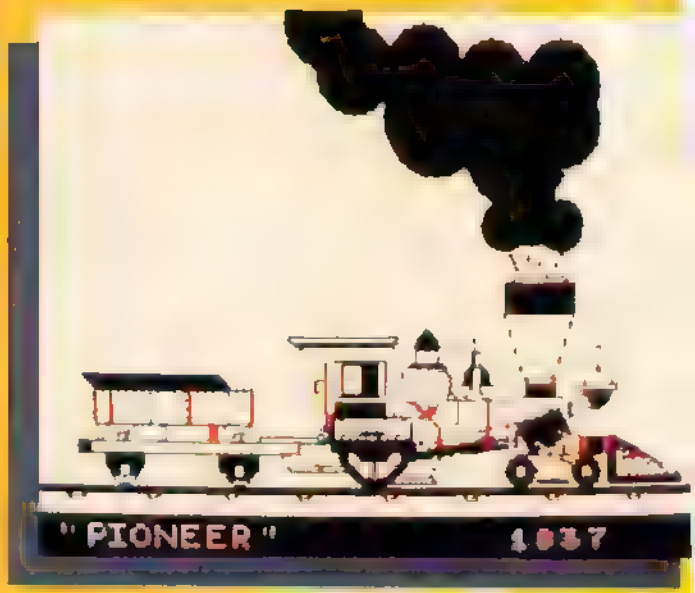

2nd PRIZE

C.W. "Harry" Harriman
Pioneer 1837
Sauntering back through history garners second prize for Harry, who lives in Bradford, Massachusetts. He used BASIC to create this memorable train.

3rd PRIZE

Charlie Fulp
Basketball Zone
Using *CoCo Max*, Charlie presents the gallery with an encompassing view of the all-American sport of basketball. Charlie lives in South Boston, Virginia.

Seth Williams
Saturn
From Benson, Arizona, Seth used BASIC to enhance the planet Saturn for the patrons of the gallery.

HONORABLE MENTION

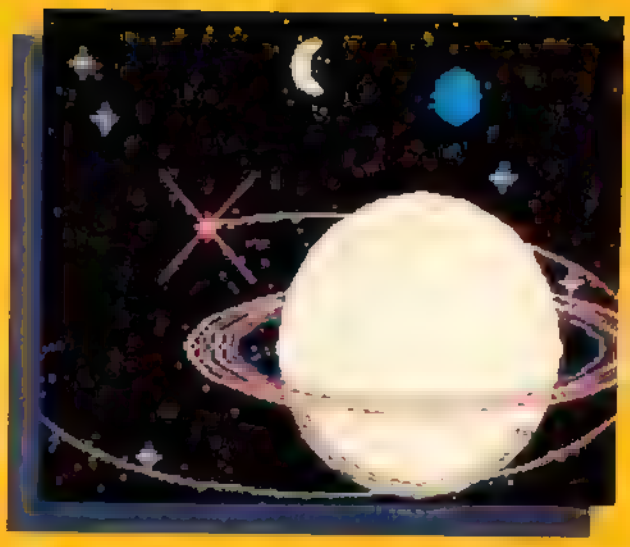

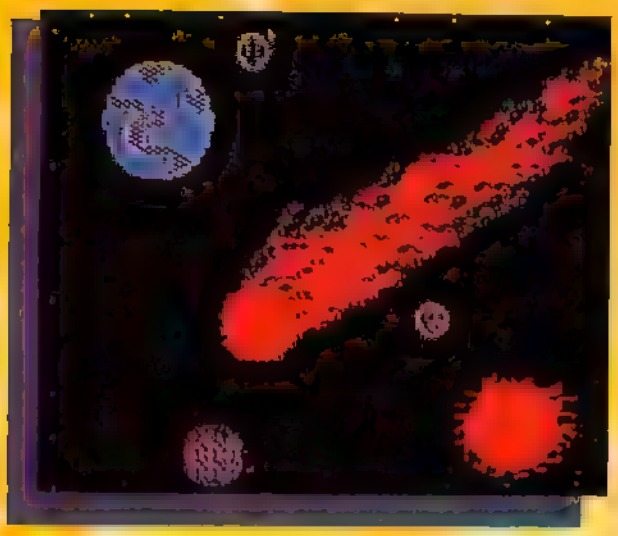

HONORABLE MENTION

James Farmer
Comet
With Halley's Comet in his thoughts, James, who lives in Charleston, South Carolina, used *Micro Illustrator* to create this fiery panorama.

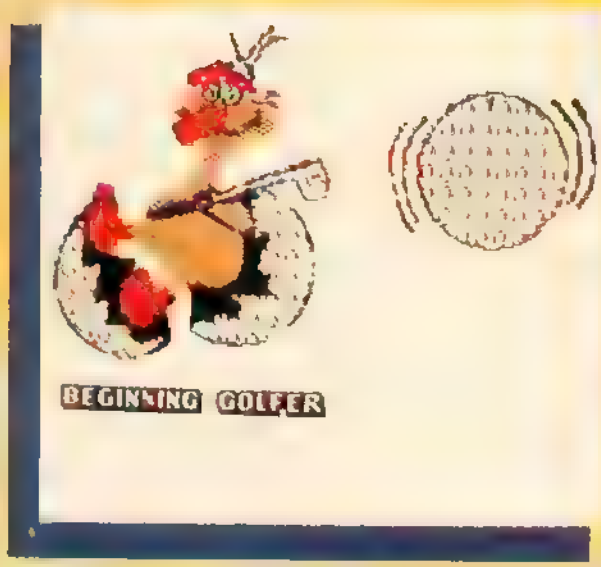

HONORABLE MENTION

Robin Moulder
Beginning Golfer
Robin enlightens the gallery with this humorous caricature for the novice golfer, created with *CoCo Max*. Robin lives in Stone Mountain, Georgia.

SHOWCASE YOUR BEST!

You are invited to nominate original work for inclusion in upcoming showings of "CoCo Gallery." Share your creations with the CoCo Community!

Be sure to send a cover letter with your name, address and phone number, detailing how you created your picture (what programs you used, etc.) and how to display it. Also, please include a few facts about yourself.

Don't send us anything owned by someone else; this means no game screens, digitized images from TV programs or material that's already been submitted elsewhere.

We will award a first prize of $25, a second prize of $15 and a third prize of $10. Honorable mentions will also be given.

— Jody Doyle, Curator

Send your entry on either tape or disk to
CoCo Gallery
THE RAINBOW
P O Box 385
Prospect, KY 40059
Attn: Jody Doyle

Make your deluxe joystick firebuttons electrically parallel

The Quick Joystick Fix

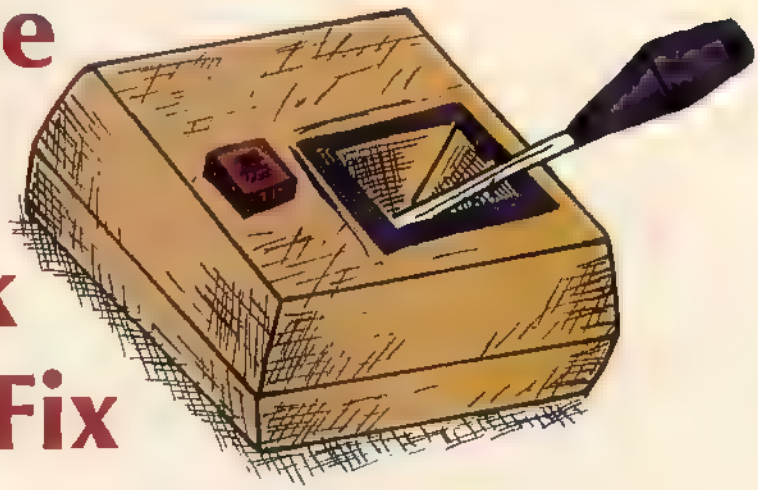

By Bruce W. Goshorn

If you own a Radio Shack deluxe joystick (Cat. No. 26-3012A) you may have realized that the black firebutton has no effect when pressed. A note in the accompanying manual states as much. With this extremely simple hardware modification, you can make it better. All you need is a Phillips screwdriver and a hot soldering iron. In fifteen minutes you'll have the versatility of two firebuttons. And away we go.

Make sure the stick is in the "spring-loaded to center" position. If not, hold the joystick in one corner and flip *both* black tabs away from the "free" positions. This disconnects the tabs (and the joystick bottom) from the rest. With the bottom facing up, loosen the two screws with the screwdriver until they ratchet. Lift the bottom free and place it on the table with the four feet up. Direct your attention to the top portion. If you fumble it and the stick assembly falls free from the upper part of the case, don't panic. Keep the assembly together and slide it back into the slots between the three black posts.

Place the stick down into a suitable holder (I used a roll of bathroom tissue) to steady it. Locate the blue wire and separate it from the rest by carefully pulling it up to a gentle loop from cable end to black firebutton. Measure about a half inch from where it exits the cable end and cut it in two. You should end up with an inch or so attached to the firebutton. Strip a quarter inch of insulation from it. Notice the white wire attached to the red firebutton lug.

Gently pull all other wires away from this lug so the iron won't melt their insulation. Unsolder the white wire and remove any excess solder. Twist the free end of the one-inch blue wire around the free end of the white wire when it's cool and solder these together. Resolder the lug where the white wire came from and let it cool. Now solder the white-blue combination to the lug. Press the other wires down between the stick assembly and the black button. Make sure there are no wires over the post in the corner.

With the cable pointing away from you, pick up the bottom case and, with the catalog number away from you and both X and Y tabs flipped away from their "free" positions, place the bottom case on the top part, align and tighten the two screws. You're ready to test.

Power up the CoCo. At the prompt, press a few random keys. Press the red firebutton and try to type. There should be no response. Release the red button and press some keys. Letters should appear. Repeat this procedure with the black firebutton. Response should be the same. Incidentally, if the CoCo won't take input from the keyboard, you probably have a stuck firebutton. Unplug the joystick(s) and, if normal operation returns, replace or repair the offending joystick.

Your firebuttons are now electrically parallel. Use the one most convenient for the particular application.

I've always believed that even the best things can be better, and this stick is the best yet. I hope you enjoy your new hardware.

(*Questions about this project may be directed to Mr. Goshorn at 1423 Wyoming Court, Orange Park, FL 32073, 904-276-2327. Please enclose an SASE when writing.*)

Bruce Goshorn is a U.S. Navy Ordnance supervisor and author of several safety articles in naval publications. His main interests are CoCo speech and music synthesis.

Recommended Reading for Your CoCo from . . .

The Rainbow Bookshelf

The Complete Rainbow Guide To OS-9

The book that demystifies the state-of-the-art operating system for the Tandy Color Computer. Authors Dale L. Puckett and Peter Dibble show you how to take advantage of OS-9's multi-tasking and multi-user features, and the capability of redirecting input and output commands at will. An easy-to-read, step-by-step guide packed with hints and tips, tutorials and free software in the form of program listings.

Book $19.95, Disk $31.00 (2 disks, book not included)

The Rainbow Book of Simulations

Features 20 award-winning entries from THE RAINBOW's first Simulation programming competition. You are the Commander-in-Chief of the Confederate Army during the Civil War, an air traffic controller at one of the nation's busiest airports, the owner of your own software business, a civil defense coordinator in charge of saving Rainbow City from a raging flood, a scientist conducting experiments on Mars . . . Your wits are on the line.

Book $9.95, Tape $9.95

The First Rainbow Book of Adventures

A collector's item containing 14 winning programs from THE RAINBOW's very first Adventure contest. Includes such favorites as *Sir Randolf of the Moors, Search for the Ruby Chalice, Deed of the York, Horror House, One Room, The Door* and *Dr. Avalos*. Plus, hints and tips on solving Adventures.

Book $7.95, Tape $7.95

The Second Rainbow Book of Adventures

Our newest arrival features 24 of the most challenging Adventure games ever compiled. Meet the Beatles and battle the Blue Meanies, find a hidden fortune, or win the heart of a beautiful and mysterious princess. Experience the thrills and chills of the most rugged Adventurer without ever leaving your seat. *Ring Quest, Secret Agent Man, Dark Castle, Curse of Karos, Island* and more!

Book $13.95, Tape $13.95

Coming soon
The Rainbow Guide to Introductory Statistics
The Second Rainbow Book of Simulations

For greater convenience, order RAINBOW Books and Tapes through the shopping area of the CoCo SIG at Delphi!

I want to start my own Rainbow Bookshelf!

Please send me:

☐ The Rainbow Book of Simulations	$ 9.95	_____
☐ Rainbow Simulations Tape	$ 9.95	_____
☐ The Complete Rainbow Guide to OS-9 (book only)	$19.95	_____
☐ Rainbow Guide to OS-9 Disk Package (2 disks)	$31.00	_____
☐ The Rainbow Book of Adventures (first)	$ 7.95	_____
☐ Rainbow Adventures Tape (first)	$ 7.95	_____
☐ The Second Rainbow Book of Adventures	$13.95	_____
☐ Second Rainbow Adventures Tape	$13.95	_____
Add $1.50 per book Shipping and Handling in U.S.		_____
Outside U.S., add $4.00 per book		_____
Kentucky residents add 5% sales tax		_____
(Allow 6 to 8 weeks for delivery)	Total	_____

Name _____

Address _____

City _____

State _____ ZIP _____

☐ Payment Enclosed, or ☐ Charge to.

☐ VISA ☐ MasterCard ☐ American Express

Account Number _____

Card Expiration Date _____

Signature _____

Mail to: Rainbow Bookshelf, The Falsoft Building, P.O. Box 385, Prospect, KY 40059

Please note: The tapes and disks offered by The Rainbow Bookshelf are not stand-alone products. That is, they are intended to be an adjunct and complement to the books. Even if you buy the tape or disk, you will still need the appropriate book.

OS-9® is a registered trademark of the Microware Systems Corporation.

To order by phone (*credit card orders only*) call 800-847-0309, 8 a.m. to 5 p.m. EST. For other inquiries call 502-228-4492.

Introducing

Lyra™

The Musical Coco Max™

IF YOU CAN POINT, YOU CAN COMPOSE

PULL DOWN MENUS

ICONS!

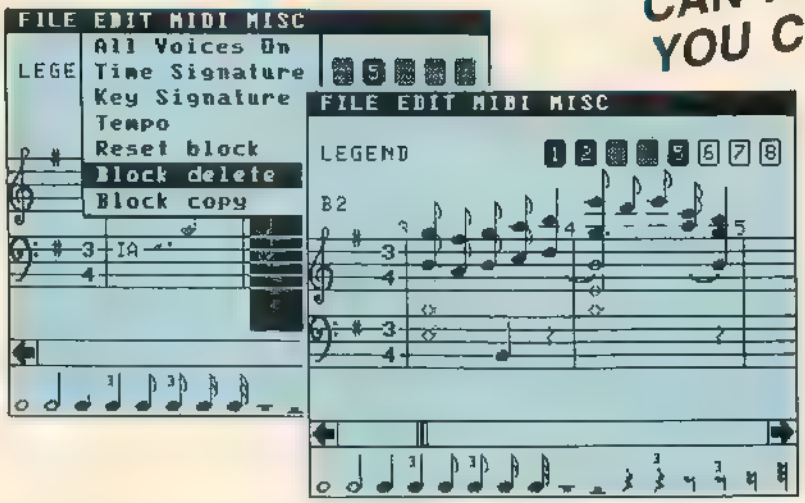

A MUST FOR MIDI USERS

LYRA is the most powerful music composition program we have seen on any computer. We don't mean just the COCO, we really mean any computer. Whether you are a novice trying to learn music or a professional musician with MIDI equipment you will find LYRA a powerful tool. You see we wrote LYRA for musicians that hate computers. If you want proof, purchase a LYRA demo for $7.95. We will apply the demo price to your purchase. MIDI output requires the LYRA MIDI cable (#MC158) or COCO MIDI Seq/Editor (#CM147).

- Ultra Easy to use, just point with joystick or mouse and click
- Compose with up to 8 completely independent voices
- Room for over 18,000 notes (This is not a misprint!)
- Super Simple Editing Supports

Note insert	Block insert
Note delete	Block delete
Note change	Block copy

- Output music to

TV Speaker	Monitor Speaker
STEREO PAK	ORCHESTRA 90
SYMPHONY 12	COCO MIDI S/E
MIDI Synth	MIDI Drum Machine

- Output up to 4 voices without additional hardware
- Output all 8 voices using either SYMPHONY 12 or one or more MIDI synthesizers and drum machines
- Output any voice on any of the 16 MIDI channels
- Transpose music to any key
- Modify music to any tempo
- Automatically inserts bar for each measure as you compose
- Key signature lets you specify sharps and flats only once, LYRA will do the rest
- Plays MUSICA 2 files using LYRA CONVERT (#LC164).
- Each voice may be visually highlighted or erased
- Each measure is numbered for easy reading
- Solo capability
- Block edits are highlighted
- Tie notes together for musical continuity
- Name of note pointed to is constantly displayed
- Jump to any point in the score instantaneously
- Memory remaining clearly displayed, however you will have plenty of memory even for the most demanding piece
- Help menu makes manual virtually unnecessary
- LYRA is 100% software, no need for extra hardware unless you want more power
- Music easily saved to tape or disk
- Requires 64K and mouse or joystick

LYRA (Disk Only) #LY122 ..... **$54.95**

LYRA OPTIONS

These LYRA options are **not** required. They are provided for those wishing additional flexibility

LYRA CONVERT

A program to convert MUSICA 2 files to LYRA files
(T or D) #LC164 ..... **$14.95**

LYRA STEREO ENHANCER

Gives the LYRA stereo output when used with the STEREO PAK or ORCHESTRA 90
(T or D) #LS149 ..... **$14.95**

LYRA MIDI CABLE

A cable to connect your computer to your MIDI synthesizer
#MC158 ..... **$14.95**

LYRA SYMPHONY 12 ENHANCER

Lets LYRA play all 8 voices through SYMPHONY 12
(T or D) #LS177 ..... **$19.95**

STEREO PAK

Plugs into the COCO ROM cartridge slot allowing easy connection to your stereo system.
#SP193 ..... **$39.95**

SYMPHONY 12

A real hardware music synthesizer, lets LYRA play all 8 voices in stereo.
(T or D) #SY149 ..... **$69.95**

COCO MIDI Seq/Editor

A professional quality MIDI interface for MIDI synthesizers.
(Disk only) #CM147 ..... **$149.95**

MUSIC LIBRARY

A collection of over 800 songs. When used with CONVERT, it gives an incredible LYRA library. Each volume 100 songs.
(T or D) #MLXXX **$29.95**

COCO MAX is a trademark of Colorwave
ORCHESTRA 90 is a trademark of Radio Shack

We accept CASH, CHECK, COD, VISA and MASTER CARD orders
Shipping and handling U.S. and Canada $3.00
Shipping and handling outside the US and Canada $5.00
COD Charge $3.00
Illinois residents add 6.5% sales tax

Speech Systems

38W255 DEERPATH ROAD
BATAVIA, ILLINOIS 60510
(312) 879-6880

COCO MIDI™ SEQUENCER/EDITOR

Now your COCO can talk to your MIDI music synthesizer. Whether you have a Korg, Roland, Casio, Yamaha, or Moog, it doesn't matter as long as it's MIDI equipped. Choose from our entry level MUSICA MIDI system that plays MUSICA files or our Professional COCO MIDI SYSTEM

- Supports up to 16 tracks.
- Up to 8000 events per track.
- May be used as a sequencer.
- User friendly graphics display.
- Menu driven.
- Metronome available.
- Real time recording.
- Save your masterpiece to disk.

- Playback any or all tracks at any tempo.
- Tracks may be deleted, copied, transposed, or mixed.
- Filter out unwanted channel or type of MIDI data.
- Tempo may be modified.
- Quantitizing to 32nd or 64th.
- Simple music editing.
- Requires 64K disk system.
- Transposition.

Comes complete with Rom Pak Hardware interface, cables, manual, and software. Requires Y-Cable or Multi-Pak.
Disk only. #CM147 . . . **$149.95**

MUSICA MIDI™

MUSICA MIDI takes any MUSICA 2 music file and plays it through your MIDI synthesizer. We offer you over 800 tunes from our MUSIC LIBRARY series (sold separately) or create your own music using MUSICA 2. Includes: documentation, plenty of music, and the cable to connect between the COCO and your synthesizer.
Tape or Disk. #CM126 . . . . . **$39.95**

DX-7 LIBRARIAN™

RAM cartridges for the Yamaha DX-7 aren't cheap and don't hold all the sounds you would like. The DX-7 LIBRARIAN is a program that when used with COCO MIDI, lets you save and load any number of sounds. Save sounds individually or as a group letting you load the DX-7 in seconds.
Disk only. #DX143 . . . . . **$29.95**

MIDI KEYBOARD

If you own the Casio CZ-101 or similar MIDI synth, you know that the mini keys and the short 3 or 4 octave keyboard is limiting. MIDI KEYBOARD when used with our full size 5 octave keyboard gives you the flexibility you need. Comes with cable to connect the COCO to your MIDI synth.
#MK167 . . . . . **$29.95**

MUSICA TO COCO MIDI

This program is for COCO MIDI users that wish to convert MUSICA files so they can be played by COCO MIDI. It opens your MIDI synths to our MUSIC LIBRARY and much public domain music.
Disk only. #MC193 . . . . . **$29.95**

MUSIC LIBRARY™

The MUSIC LIBRARY series consists of 8 volumes: 100 through 800 each sold separately. Each contains over 100 four voice music selections with a playing time of over 3 hours each. The disk version is shipped on 5 full disks. When coupled with STEREO PAK, the music is reproduced with unsurpassed realism.

A JUKEBOX program is included to allow you to select specific songs or automatically play each. These songs are ready to go, you don't need MUSICA 2 or a knowledge of music. MUSICA 2 users may customize each song. Each volume sold separately, specify tape or disk. #MLXXX **$29.95**
List of 800 songs #LS800 . . . . . **$3.00**

MUSIC LIBRARY 100

Stage, Screen, & TV	Classical
Music of the 70's	Christmas (popular)
Music of the 60's	Christmas (traditional)
Music of the 50's	Patriotic
Old Time Favorites	Polka Party

MUSIC LIBRARY 200 (another 100 selections)
MUSIC LIBRARY 300 (another 100 selections)
MUSIC LIBRARY 400 (another 100 selections)
MUSIC LIBRARY 500 (another 100 selections)
MUSIC LIBRARY 600 (another 100 selections)
MUSIC LIBRARY 700 (another 100 selections)
MUSIC LIBRARY 800 (another 100 selections)

Entire Library 30 Hours of Music! 40 disks or 25 tapes

Lyra™ MEETS SYMPHONY 12™

12 SIMULTANEOUS VOICES

4 NOISE GENERATORS

STEREO & MONO

SOUND EFFECTS

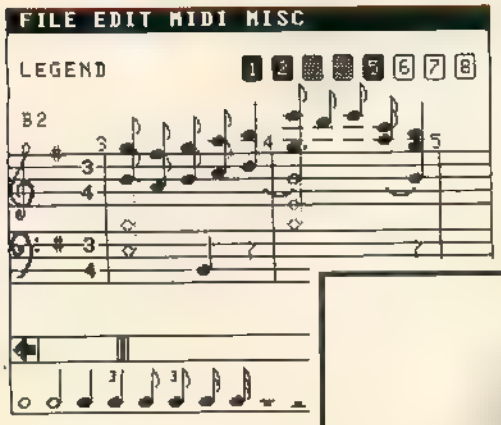

SPECIAL COMBINATION OFFER!

If you want to compose music, experiment or just listen to music, LYRA is the tool you need. LYRA represents the new state-of-the-art super user friendly software. Pull down menus and icons make composing music as easy as pointing with a joystick or mouse and clicking. LYRA is capable of 8 individually controlled voices. You may take advantage of the 8 voice power of LYRA using external MIDI synthesizers or SYMPHONY 12. We believe that LYRA and SYMPHONY 12 was a match made in heaven. For a limited time, when you purchase both, we will include free the LYRA SYMPHONY 12 CONNECTION, a $19.95 value.

STEREO AND MONO. By connecting SYMPHONY 12 to your home stereo system, music is produced in stereo, 6 voices from each channel. However, you don't need to have a stereo system, all 12 voices also come out of your TV or monitor.

SOUND EFFECTS. SYMPHONY 12 is a sophisticated sound generator. 12 voices and 4 noise generators give you incredible sound effect capability. We have included gun shot, explosion, racing car and more.

SYMPHONY 12. You get over a dozen music and sound effect selections and complete documentation. Software is shipped on Tape or Disk.

PIANO KEYBOARD. For those wishing to turn SYMPHONY 12 into a real polyphonic synthesizer we offer a full size 61 note piano keyboard.

Tape users using both SYMPHONY 12 and the PIANO KEYBOARD will require a Y-CABLE. Disk systems require a Triple Y-CABLE or MULTI-PAK.

SYMPHONY 12 (T or D) #SY149 **$69.95**
LYRA SYMPHONY 12 ENHANCER #LS177 **$19.95**
PIANO KEYBOARD #PK185 **$169.95**
DOUBLE Y-CABLE #DY181 **$28.95**
TRIPLE Y-CABLE #TY173 **$34.95**

GUITAR CHORD BOOK

This program written by a guitar instructor of 17 years displays in high resolution graphics the exact fingering for over 100,000 chord combinations. You may even tune your guitar to the computer and play along. Whether you are a beginning guitar student or an advanced player, you will find this quick reference to guitar chords invaluable.

32K Disk only #GC153 ..... **$29.95**

MUSIC THEORY

COURSE 1

This course covers all the basics from music notation & duration, key signatures, tempo, to an introduction of the keyboard. This is an entry level course recommended as a prerequisite for Course 2.

32K Disk only #MT101 ..... **$49.95**

COURSE 2

A more advanced course that deals with: Major and Harmonic Minor scales, interval spelling, Triad (Chord) theory, Inversions, Dominant 7th chords, and ear training of the intervals.

32K Disk only #MT102 ..... **$49.95**

Now Your Computer Can Listen To You!

EARS

Electronic Audio Recognition System

$99.95

- SPEECH RECOGNITION
- HANDS OFF PROGRAMMING
- HIGH QUALITY SPEECH REPRODUCTION

EARS Does It All!

INCREDIBLE!

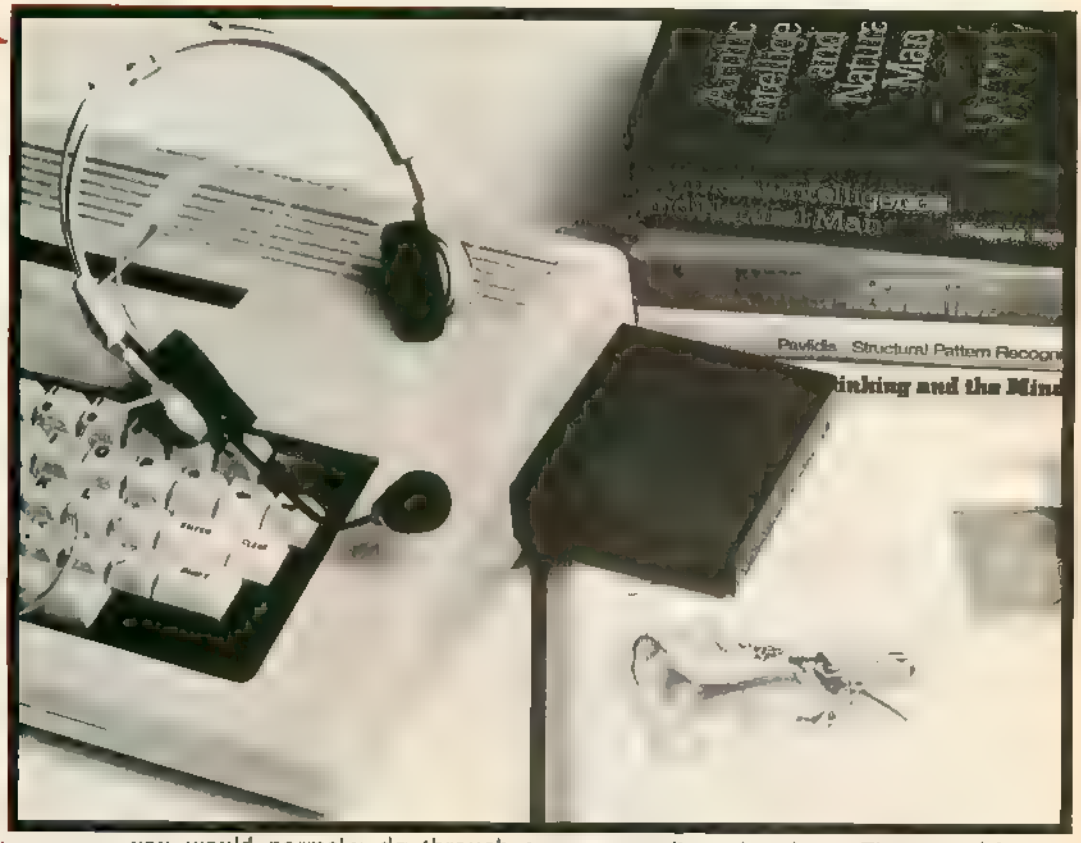

Two Years In the Making. Speech Systems was formed to develop new and innovative speech products. After 2 years of intensive Research and Development, we have created a truely sophisticated speech recognition device. Recognition rates from 95% to 98% are typical. Until now, such a product was outside the price range of the personnel computer market, and even small businesses.

EARS is trained by your voice and capable of recognizing any word or phrase. Training EARS to your particular voice print takes seconds. Up to 64 voice prints may be loaded into memory. You may then save on tape or disk as many as you like so that your total vocabulary is virtually infinite.

Speech and Sound Recognition. EARS is really a sound recognition system, so it really doesn't matter whether you speak in English, Spanish, or French. In fact you do not have to speak at all, you can train EARS to understand sounds such as a musical note or a door slamming.

Hands Off Programming. Imagine writing your own BASIC programs without ever touching the keyboard. Everything that you would normaliy do through a keyboard can now be done by just speaking.

Programming EARS Is Easy. LISTEN, MATCH and other commands have been added to BASIC so that programming EARS is a piece of cake! The single BASIC line. 10 LISTEN: MATCH will instruct EARS to listen to you and return the matching phrase.

It Talks. EARS is also capable of high quality speech We mean REALLY high quality. The speech is a fixed vocabulary spoken by a professional announcer. Speech Systems is currently creating a library of thousands of high quality words and phrases. For a demonstration call **(312) 879-6844**, you won't believe your ears or our EARS.

DISK OWNERS. EARS will work with any disk system with either a MULTI-PAK or Y-CABLE. Our new Triple Y-CABLE was specifically developed for those wishing to add SUPER VOICE as a third device.

You Get Everything You Need. You get everything you need including a specially designed professional headset style noise canceling microphone. The manual is easy to use and understand. Several demonstration examples are included so you don't have to write your own programs unless you want to. EARS will work in any 32K or 64K Color Computer.

SUPER VOICE $20 OFF

Imagine talking to your computer and it talking back to you. When you need an unlimited vocabulary, you can't beat SUPER VOICE. For a limited time, we will give you the SUPER VOICE for $59.95 with your EARS purchase. Even if you already have another speech unit, here is your chance to buy the best and save $20

VOICE CONTROL

Applications for EARS are astounding. Here is our first of many listening programs to come. VOICE CONTROL is a program specifically designed to allow you to control any appliance in your house with your voice and our HOME COMMANDER (sold separately) or the Radio Shack Plug 'N' Power controller. For example, you can control your TV by saying "TV ON" or "TV OFF". . **$24.95**

FREE BLANK DISK OR TAPE WITH EVERY ORDER

VISA MasterCard

Dealer Inquiries Invited

We accept CASH, CHECK, COD, VISA and MASTER CARD orders.
Shipping and handling US and Canada $3.00
Shipping and handling outside the US and Canada $5.00
COD charge $2.00
Illinois residents add 6¼% sales tax

Speech Systems

38W255 DEERPATH ROAD
BATAVIA, ILLINOIS 60510
(312) 879-6880 (TO ORDER)
1 MEGABYTE COLORAMA (312) 879-6811 (24 HR. BBS)
CALL ANY DAY TO ORDER ALSO ORDER BY MAIL OR BBS

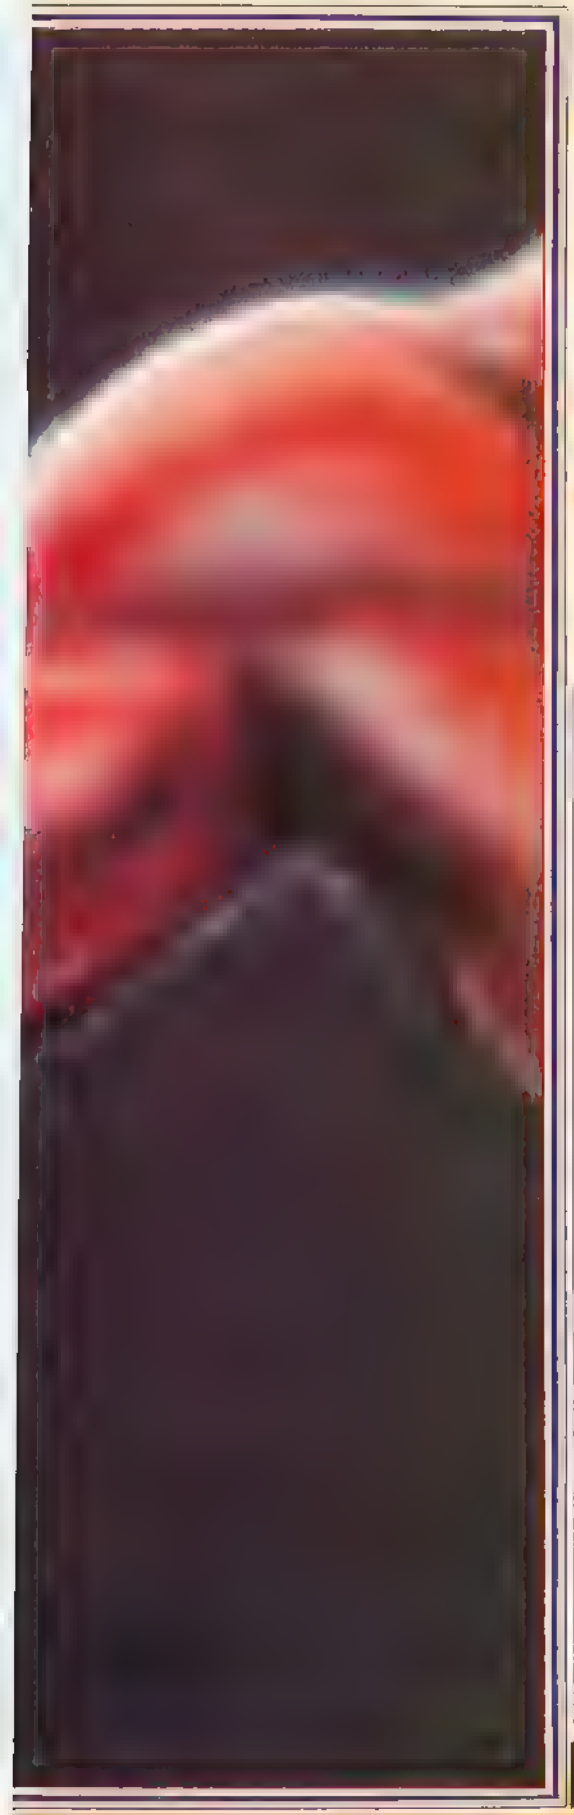

It takes a skilled boxer to come out the winner when you're in . . .

The Eye of the Tiger

By Tim Jones

After seeing the new *Rocky* movie, I just had to try and make a boxing game for my CoCo. Finally, after several long weeks I came up with *Boxing*.

The object of the game is to gain as many points as possible, beat all three opponents and never get knocked down.

When you run the game, the title screen appears and a short song is played. The scoreboard is then presented. This shows your physical strength as opposed to your opponent's. Also on this screen are the fight and round numbers and the total score, which is updated after every fight.

The game screen is composed of several parts. At the top your opponent's strength is represented by a blue bar; your strength is shown at the bottom. You are the man marked "U.S.A." At the left of the screen is a red time bar. When this bar reaches the bottom, the round ends.

Move the joystick in the direction you want to go (without pressing the button). To punch with the left hand, press the firebutton. To punch with the right hand is a little harder. First move the joystick to the right, and then press the firebutton. Since throwing a right punch is harder, you receive more points for hitting with it.

Every time you hit with the left hand, your opponent's power decreases by 10, your power increases by five, and your score increases by five points. If you hit with the right hand, his power decreases by 15, yours increases by five, and your score increases by 10. The same also goes for him.

Decreasing the opponent's strength to zero knocks him down. In order to advance a fight, either knock him out completely, or last three rounds with a score higher than his.

To knock out the first opponent completely, decrease his power to zero. To knock out the second opponent com-

Tim Jones is a high school student in Clinton, Louisiana. He enjoys working with computers and swimming.

pletely, you must knock him down twice in one round. To knock out the third opponent you must have three knock downs in one round. Note: There is no count after a knock down, so stay alert!

Game play is rather sluggish, so I have included a POKE 65495,0 in Line 130. If your computer can't use it, just delete that line. As you can see, the game is long; buying RAINBOW ON TAPE can save hours of debugging. Enjoy! □

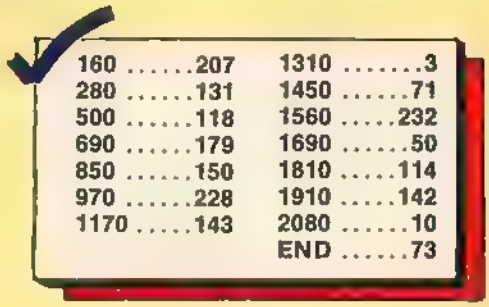

160	207	1310	3
280	131	1450	71
500	118	1560	232
690	179	1690	50
850	150	1810	114
970	228	1910	142
1170	143	2080	10
		END	73

The listing: BOXING

```
1 ' TIM JONES
2 ' P.O. BOX 7938
3 ' CLINTON, LA. 70722
4 ' COMPLETED JAN. 20, 1986
10 PCLEAR4:CLEAR500:RESTORE
20 RO=1:FI=1:L(1)=90:L(2)=60:L(3
)=50:KO=0
30 PMODE3,1:PCLS:SCREEN0,0
40 CLS(0):FORY=1 TO 5:FORX=1 TO
32:READ A
50 A$(Y)=A$(Y)+CHR$(A+48):NEXT X
,Y
60 PRINT@33,A$(1);A$(2);A$(3);A$
(4);A$(5);
70 PRINT@239,"BY";:PRINT@300,"TI
M JONES";
80 DIM M(70),M2(70),GL(40),P2(90
),P1(80),PA(80),PB(90),R1(80),R2
(90),RA(80),RB(90),FL(200)
90 POKE65494,0
100 A$="T304L8EL4GL1AL8AL4BL1E"
110 PLAY"XA$;L8EE;XA$;"
120 PLAY"T3L8DCL4DL8CDL2EL8DDL4C
L8C03L4BL8BL1AL4AO4AL1D"
130 POKE65495,0
139 ' GRAPHICS FOR GAME
140 DRAW"C4":LINE(45,30)-(210,16
0),PSET,B
150 LINE(45,30)-(35,20),PSET,BF
160 LINE(210,160)-(220,170),PSET
,BF
170 LINE(210,30)-(220,20),PSET,B
F
180 LINE(45,160)-(35,170),PSET,B
F
190 L$(1)="BM96,23C3R6U4L6D8R2C2
R8C3R6L6U8R6D8R2C2R2C3U8D8R8C2R2
C3U6E2R4F2D6U4L6R8C2D4R2C3U8F8U8
R2C2R2C3D8R5EU5H2L2":'POLAND
200 L$(2)="BM113,21C3H2L4G2D5FR5
EU2C2R4D3U8C3D7RFR5EU7R2C2R2C3D8
R5EU2HL2R2EU3L4R4C2R4D8C3U7RER5F
D7U4L6":'CUBA
210 L$(3)="BM101,19C3D7FR5EU7R2C
2R2D8C3R2C2R2C3R6U4L6U4R8C2D8R2C
3R2C2R2C3R6U4L6U4R8C2R2D8C3R2C2R
2C3U8R5FD3GL2F3R2C2R2C3R":'U.S.S
.R.
220 M1$="U8HL8G2D8FR9E"
230 M2$="U8HL34G2D8FR35E"
240 DRAW"BM116,70;C3;XM2$;"
250 DRAW"BM166,70;C2;XM2$;"
260 DRAW"BM102,70;C2;XM1$;"
270 DRAW"BM154,70;C3;XM1$;"
280 CLS:PRINT"                SCORE
":PRINT"YOU: 0
HIM: 0":PRINT@236,"FIGHT 1":PRIN
T@268,"ROUND 1":PRINT@362,"TOTAL
 SCORE":PRINT@431,"0"
290 LINE(88,71)-(88,61),PSET
300 LINE(104,71)-(104,61),PSET
310 DRAW"C2"
320 LINE(140,71)-(140,61),PSET
330 LINE(156,71)-(156,61),PSET
340 PAINT(138,63),2,2:PAINT(158,
63),2,2:PAINT(144,63),3,3
```

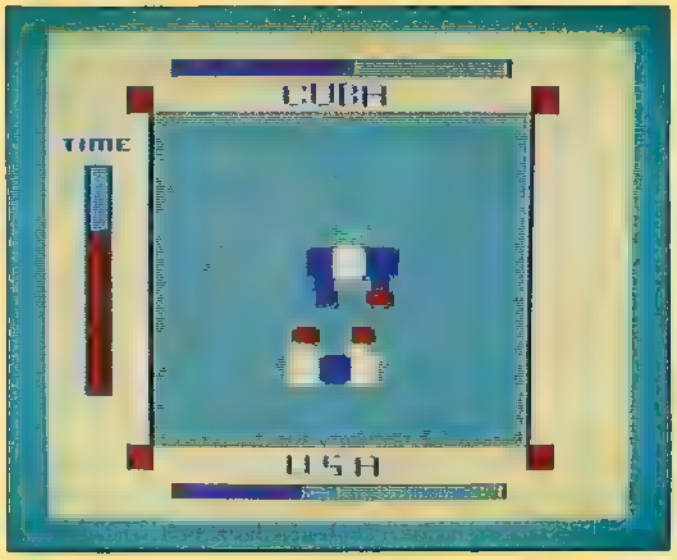


```
350 LINE(132,57)-(138,60),PSET,B
F
360 LINE(156,57)-(162,60),PSET,B
F
370 DRAW"C3"
380 PAINT(84,63),3,3:PAINT(110,6
3),3,3:PAINT(93,63),2,2
390 LINE(82,72)-(88,76),PSET,BF
400 LINE(106,72)-(112,76),PSET,B
F
410 DRAW"C4"
420 LINE(80,77)-(90,83),PSET,BF
```

```
43Ø LINE(1Ø4,77)-(114,83),PSET,B
F
44Ø PSET(1Ø4,83,1):PSET(114,83,1
):PSET(114,77,1):PSET(1Ø4,77,1)
45Ø PSET(8Ø,83,1):PSET(9Ø,83,1):
PSET(9Ø,77,1):PSET(8Ø,77,1)
46Ø GET(72,56)-(124,88),M,G
47Ø GET(8Ø,77)-(116,83),GL,G
48Ø PUT(13Ø,5Ø)-(166,56),GL,PSET
49Ø GET(122,46)-(174,76),M2,G
5ØØ LINE(122,46)-(15Ø,6Ø),PRESET
,BF
51Ø PUT(138,32)-(174,38),GL,PSET
52Ø LINE(158,32)-(172,38),PRESET
,BF
53Ø DRAW"C2":LINE(138,39)-(132,6
Ø),PSET
54Ø LINE(144,39)-(138,6Ø),PSET:L
INE(138,39)-(144,39),PSET:PAINT(
14Ø,4Ø),2,2
55Ø GET(128,31)-(168,72),P2,G
56Ø PUT(136,4Ø)-(172,46),GL,PSET
57Ø LINE(15Ø,4Ø)-(17Ø,49),PRESET
,BF:GET(128,4Ø)-(168,72),P1,G
58Ø LINE(13Ø,32)-(15Ø,6Ø),PRESET
,BF
59Ø PUT(122,46)-(174,76),M2,PSET
6ØØ PUT(15Ø,32)-(186,38),GL,PSET
61Ø LINE(154,5Ø)-(164,56),PRESET
,BF
62Ø DRAW"C2":LINE(152,39)-(156,6
Ø),PSET
63Ø LINE(162,6Ø)-(158,39),PSET:L
INE-(152,39),PSET
64Ø PAINT(154,41),2,2
65Ø GET(128,32)-(168,72),PB,G
66Ø PUT(152,4Ø)-(188,46),GL,PSET
67Ø GET(128,4Ø)-(166,72),PA,G
68Ø LINE(72,56)-(124,88),PRESET,
BF:PUT(74,28)-(126,6Ø),M,PSET
69Ø LINE(1Ø6,49)-(116,55),PRESET
,BF:PUT(1ØØ,67)-(136,99),GL,PSET
7ØØ DRAW"C3":LINE(1Ø8,45)-(1Ø2,6
6),PSET:LINE(116,45)-(11Ø,66),PS
ET:LINE(1Ø4,66)-(1Ø8,66),PSET:PA
INT(11Ø,5Ø),3,3
71Ø GET(78,33)-(118,73),R2,G
72Ø PUT(1Ø2,58)-(138,64),GL,PSET
73Ø GET(78,33)-(118,64),R1,G
74Ø LINE(82,56)-(12Ø,78),PRESET,
BF:PUT(74,28)-(126,6Ø),M,PSET
75Ø LINE(8Ø,45)-(94,58),PRESET,B
F:LINE(45,3Ø)-(18Ø,3Ø),PSET
76Ø PUT(64,67)-(1ØØ,73),GL,PSET
77Ø DRAW"C3":LINE(82,45)-(88,66)
,PSET:LINE(9Ø,45)-(96,66),PSET:L
INE-(9Ø,66),PSET:PAINT(92,64),3,
3
78Ø GET(8Ø,33)-(118,73),RB,G
79Ø PUT(62,58)-(98,64),GL,PSET
8ØØ GET(8Ø,33)-(118,64),RA,G
81Ø DRAW"C4":LINE(16,5Ø)-(26,14Ø
),PSET,BF
82Ø LINE(48,18)-(2Ø6,28),PRESET,
BF
83Ø DRAW"C3":LINE(56,1Ø)-(127,16
),PSET;BF:DRAW"C4":LINE(54,1Ø)-(
2ØØ,16),PSET,B:LINE(128,11)-(198
,15),PRESET,BF
84Ø DRAW"C3":LINE(56,176)-(127,1
82),PSET,BF:DRAW"C4":LINE(54,176
)-(2ØØ,182),PSET,B:LINE(128,177)
-(198,181),PRESET,BF
85Ø X=1ØØ:Y=1Ø2:X2=1ØØ:Y2=6Ø:TI=
51:H=127:H2=127
86Ø LINE(48,32)-(2Ø6,156),PRESET
,BF
87Ø DRAW"C4":LINE(45,3Ø)-(21Ø,16
Ø),PSET,B
88Ø PAINT(Ø,Ø),2,4
89Ø DRAW"C3":LINE(16,5Ø)-(26,14Ø
),PSET,B
9ØØ PAINT(5Ø,19),2,2:DRAW L$(FI)
91Ø DRAW"BM1Ø6,164C3D7RFR5EU7R2C
2R2D8C3R2C2R2C3R6U4L6U4R8C2D8R2C
3R2C2R2C3U6E2R4F2D6R2C2R2C3L2C2L
2C3U4L6":'U.S.A.
92Ø DRAW"BM6,4ØC3R4L2D4R2C2R4C3U
4R2C2R2C3D4U4R4D4U4R4D4R2C2R2C3R
4L4U2R2L2U2R4":'TIME
929 ' START OF MAIN ROUTINE
93Ø SCREEN1,Ø:PLAY"T4L2O4CC"
94Ø MX=JOYSTK(Ø):MY=JOYSTK(1):TI
=TI+.5:LINE(18,TI)-(24,TI),PRESE
T:IF TI=139 THEN PLAY"V15T4L3O4C
CCC":GOTO167Ø
95Ø IF Y=<Y2+3Ø THEN Y=Y+2
96Ø IF X=<46 THEN X=46 ELSE IF X
=>156 THEN X=156
97Ø IF Y=<32 THEN Y=32 ELSE IF Y
=>128 THEN Y=128
98Ø PUT(X,Y)-(X+52,Y+3Ø),M2,PSET
99Ø PUT(X2,Y2)-(X2+52,Y2+32),M,P
SET
1ØØØ IF RND(1ØØ)=<L(FI) THEN 1Ø2
Ø
1Ø1Ø IF RND(2)=1 THEN 14ØØ ELSE
156Ø
1Ø2Ø IF Y2+3Ø=>Y THEN Y2=Y2-2
1Ø3Ø IF RND(1Ø)=>5 THEN X2=X2-4
ELSE X2=X2+4
1Ø4Ø IF RND(1Ø)=>5 THEN Y2=Y2+2
ELSE Y2=Y2-2
1Ø5Ø IF X2=<46 THEN X2=46 ELSE I
F X2=>156 THEN X=156
1Ø6Ø IF Y2=<32 THEN Y2=32 ELSE I
F Y=>128 THEN Y=128
1Ø7Ø IF PEEK(6528Ø)=126 OR PEEK(
```

```
6528Ø)=254 THEN 113Ø
1Ø8Ø IF MX=<1Ø THEN X=X-4
1Ø9Ø IF MX=>5Ø THEN X=X+4
11ØØ IF MY=<1Ø THEN Y=Y-2
111Ø IF MY=>5Ø THEN Y=Y+2
112Ø GOTO94Ø
113Ø IF MX=>5Ø THEN ELSE 125Ø
114Ø LINE(X+32,Y+3)-(X+42,Y+11),
PRESET,BF
115Ø PUT(X+6,Y-7)-(X+44,Y+39),PA
,OR
116Ø IF PPOINT(X+3Ø,Y-1Ø)=4 THEN
 HG=1
117Ø IF PPOINT(X+36,Y-1Ø)=4 THEN
 HG=1
118Ø IF PPOINT(X+34,Y-13)=4 THEN
 HG=1
119Ø LINE(X+3Ø,Y-8)-(X+4Ø,Y+1),P
RESET,BF
12ØØ IF HG=1 THEN HG=Ø:PLAY"T4L2
55V31O1ADCFBAGEDV16ACGADV4EABCAE
DB":GOTO94Ø
121Ø PUT(X+6,Y-15)-(X+46,Y+25),P
B,OR
122Ø LINE(X+28,Y-15)-(X+38,Y+1),
PRESET,BF
123Ø IF PPOINT(X+32,Y-16)=2 THEN
 H=H-15:H2=H2+5:S2=S2+1Ø:GOSUB13
6Ø
124Ø GOTO 94Ø
125Ø LINE(X+8,Y+3)-(X+18,Y+11),P
RESET,BF
126Ø PUT(X+6,Y-7)-(X+46,Y+39),P1
,OR
127Ø IF PPOINT(X+18,Y-1Ø)=4 THEN
 HG=1
128Ø IF PPOINT(X+16,Y-12)=4 THEN
 HG=1
129Ø IF PPOINT(X+24,Y-12)=4 THEN
 HG=1
13ØØ LINE(X+14,Y-8)-(X+24,Y+1),P
RESET,BF
131Ø IF HG=1 THEN HG=Ø:PLAY"T255
L255V31O1ADCFBAGEDV16ACGADV4EABC
AEDB":GOTO94Ø
132Ø PUT(X+6,Y-16)-(X+46,Y+25),P
2,OR
133Ø LINE(X+14,Y-15)-(X+26,Y+2),
PRESET,BF
134Ø IF PPOINT(X+2Ø,Y-16)=2 THEN
 H=H-1Ø:H2=H2+5:S2=S2+5:GOSUB 13
6Ø
135Ø GOTO 94Ø
136Ø IF H=<57 THEN LINE(57,11)-(
199,15),PRESET,BF:PLAY"V15T4L4O4
ADEFA":GOTO 139Ø
137Ø PLAY"T4L255V3ØO1;1;2;3;4;5;
6"
138Ø LINE(H,11)-(199,15),PRESET,
BF:DRAW"C3":LINE(H2,177)-(55,181
),PSET,BF:RETURN
139Ø S2=S2+1Ø:H=127:H2=127:KO=KO
+1:GOTO168Ø
14ØØ LINE(X2+32,Y2+21)-(X2+42,Y2
+27),PRESET,BF
141Ø PUT(X2+4,Y2+6)-(X2+44,Y2+37
),R1,OR
142Ø IF PPOINT(X2+3Ø,Y2+38)=4 TH
EN HG=1
143Ø IF PPOINT(X2+34,Y2+38)=4 TH
EN HG=1
144Ø IF PPOINT(X2+34,Y2+41)=4 TH
EN HG=1
145Ø LINE(X2+28,Y2+31)-(X2+38,Y2
+37),PRESET,BF
146Ø IF HG=1 THEN HG=Ø:PLAY"T4L2
55 V31O1ADCFBAGEDV16ACGADV4EABCA
EDB":GOTO 94Ø
147Ø PUT(X2+4,Y2+6)-(X2+44,Y2+46
),R2,OR
148Ø LINE(X2+26,Y2+29)-(X2+38,Y2
+46),PRESET,BF
149Ø IF PPOINT(X2+34,Y2+47)=3 TH
EN H2=H2-1Ø:H=H+5:S1=S1+5:GOTO 1
51Ø
15ØØ GOTO94Ø
151Ø IF H2=<57 THEN LINE(57,177)
-(199,181),PRESET,BF:PLAY"V15T4L
4O4ADEFA":GOTO 154Ø
152Ø PLAY"T4L255V3ØO1;1;2;3;4;5;
6"
153Ø LINE(H2,177)-(199,181),PRES
ET,BF:DRAW"C3":LINE(H,11)-(55,15
),PSET,BF:GOTO 94Ø
154Ø POKE65494,Ø:PLAY"T3O3P4L2CL
3CL8CL2CE-L8DL3DL8CL3CO2L8BO3L2C
P2":CLS:PRINT:PRINT"  YOU LOST T
HIS TIME AROUND,      BUT YOU CA
N ALWAYS CHALLANGE    HIM TO A R
E-MATCH.":GOTO 216Ø
155Ø GOTO 94Ø
156Ø LINE(X2+8,Y2+16)-(X2+18,Y2+
27),PRESET,BF
157Ø PUT(X2+6,Y2+6)-(X2+44,Y2+37
),RA,OR
158Ø IF PPOINT(X2+16,Y2+39)=4 TH
EN HG=1
159Ø IF PPOINT(X2+2Ø,Y2+39)=4 TH
EN HG=1
16ØØ IF PPOINT(X2+18,Y2+4Ø)=4 TH
EN HG=1
161Ø LINE(X2+12,Y2+29)-(X2+22,Y2
+38),PRESET,BF
162Ø IF HG=1 THEN HG=Ø:PLAY"T4L2
55V31O1ADCFBAGEDV16ACGADV4EABCAE
DB":GOTO94Ø
163Ø PUT(X2+6,Y2+6)-(X2+44,Y2+46
),RB,OR
```

```
164Ø LINE(X2+12,Y2+29)-(X2+24,Y2
+46),PRESET,BF
165Ø IF PPOINT(X2+2Ø,Y2+47)=3 TH
EN H2=H2-15:H=H+5:S1=S1+1Ø:GOTO
151Ø
166Ø GOTO94Ø
167Ø RO=RO+1:KO=Ø:IF RO=4 THEN 1
72Ø ELSE CLS:PRINT"
SCORE":PRINT"YOU:";S2;"
       HIM:";S1:PRINT@236,"FIGH
T ";FI:PRINT@268,"ROUND ";RO:PRI
NT@362,"TOTAL SCORE":PRINT@43Ø,S
C:FOR T=1TO2ØØØ:NEXTT:GOTO81Ø
168Ø IF KO=1 AND FI=1 THEN FI=2:
RO=Ø:SC=SC+S2:S1=Ø:S2=Ø:GOSUB176
Ø:GOTO167Ø
169Ø IF KO=2 AND FI=2 THEN FI=3:
RO=Ø:SC=SC+S2:S1=Ø:S2=Ø:GOSUB176
Ø:GOTO 167Ø
17ØØ IF KO=3 AND FI=3 THEN SC=SC
+S2:GOSUB 176Ø:GOTO 174Ø
171Ø LINE(55,177)-(127,181),PSET
,BF:LINE(55,11)-(127,15),PSET,BF
:LINE(128,177)-(199,181),PRESET,
BF:LINE(128,11)-(199,15),PRESET,
BF:GOTO94Ø
172Ø IF S1 >= S2 THEN CLS:PRINT:
PRINT"   HE WON BY A SPLIT DECIS
ION":GOTO 154Ø
173Ø IF S1<S2 THEN CLS:PRINT:PRI
NT"  YOU WON BY A SPLIT DECISION
":IF FI=3 THEN 175Ø ELSE FORT=1T
O1ØØØ:NEXTT:KO=Ø:FI=FI+1:RO=Ø:SC
=SC+S2:S1=Ø:S2=Ø:GOTO 167Ø
174Ø CLS:PRINT:PRINT"YOU KNOCKED
 OUT THE CHAMPION!!!!"
175Ø SC=SC+S2:FORT=1TO1ØØØ:NEXTT
:GOTO187Ø
176Ø FORT=1TO2Ø:CLS(2):PRINT@268
,"knockout";
177Ø PLAY"T255CDEFGAB"
178Ø CLS(2)
179Ø PLAY"T255AC"
18ØØ NEXT
181Ø RETURN
182Ø DATA 142,14Ø,14Ø,137,128,13
4,14Ø,14Ø,137,128,137,128,128,12
9,136,132,14Ø,141,14Ø,14Ø,128,13
9,128,128,128,138,129,14Ø,14Ø,14
Ø,137
183Ø DATA 128,138,128,128,133,12
8,138,128,128,133,128,128,137,12
9,136,128,128,128,133,128,128,12
8,138,137,128,128,138,133,128,12
8,128,128,128
184Ø DATA 142,14Ø,14Ø,137,128,13
8,128,128,133,128,128,129,137,12
8,128,128,128,133,128,128,128,13
8,128,137,128,138,133,128,128,12
9,131,128
185Ø DATA 138,128,128,133,128,13
8,128,128,133,128,129,136,128,13
7,128,128,128,133,128,128,128,13
8,128,128,137,138,133,128,128,12
8,133,128
186Ø DATA 14Ø,14Ø,14Ø,136,128,13
2,14Ø,14Ø,136,128,136,128,128,12
8,136,132,14Ø,14Ø,14Ø,14Ø,128,13
6,128,128,128,136,128,14Ø,14Ø,14
Ø,136,128
187Ø PMODE3,1:PCLS:SCREENØ,Ø
188Ø POKE65494,Ø
189Ø FOR X=1ØØTO162 STEP12
19ØØ DRAW"BM"+STR$(X)+",96C2D9ØR
2U9ØR2D9ØR2C4U9ØR2D9ØR2U9Ø"
191Ø NEXTX
192Ø DRAW"BM172,96;C2D9ØR2U9Ø"
193Ø DRAW"C3":LINE(142,96)-(174,
133),PSET,BF
194Ø FOR Y=1ØØ TO 13Ø STEP 6:FOR
X=146 TO 17Ø STEP 6
195Ø PSET(X,Y,2):PSET(X+2,Y+3,2)
:NEXTX,Y
196Ø LINE(142,96)-(172,133),PSET
,B
197Ø GET (1ØØ,96)-(176,191),FL,G
198Ø PMODE3,1:PCLS:SCREEN1,Ø
199Ø Y=Y-2
2ØØØ PUT(9Ø,Y)-(166,Y+95),FL,PSE
T
2Ø1Ø READ N
2Ø2Ø IF N=-1 THEN 2Ø8Ø
2Ø3Ø SOUND N+1ØØ,1
2Ø4Ø IF Y=18THEN Y=Y+2
2Ø5Ø GOTO 199Ø
2Ø6Ø DATA 47,47,25,25,47,47,8,8,
25,33,47,59,7Ø,47,47,47,47,47,25
,25,47,47,8,8,85,8Ø,85,93,59,85,
85,85,47,93,93,85,76,76,7Ø,7Ø,76
2Ø7Ø DATA 85,7Ø,59,47,76,76,76,7
6,76,59,59,76,76,47,47,47,59,76,
47,85,76,-1
2Ø8Ø FORT=1TO8
2Ø9Ø X=RND(2ØØ)+25:Y=RND(14Ø)+2Ø
21ØØ FORR=1TO3Ø STEP5
211Ø C=RND(3)+1
212Ø CIRCLE(X,Y),R,C
213Ø NEXTR,T
214Ø FORT=1TO2ØØØ:NEXTT
215Ø CLS:PRINT:PRINT"  THE PRESI
DENT OF THE UNITED     STATES CO
NGRATULATES YOU FOR    WINNING T
HE TITLE OF...":PRINT:PRINT"
WORLD HEAVY-WEIGHT BOXING":PRINT
@236,"CHAMPION"
216Ø PRINT:PRINT"    YOUR FINAL
SCORE WAS";SC:PRINT:PRINT TAB(12
)"GAME OVER":END
```

THE NEW GENERATION

THE NEW NX-10
(Replaces the SG-10)

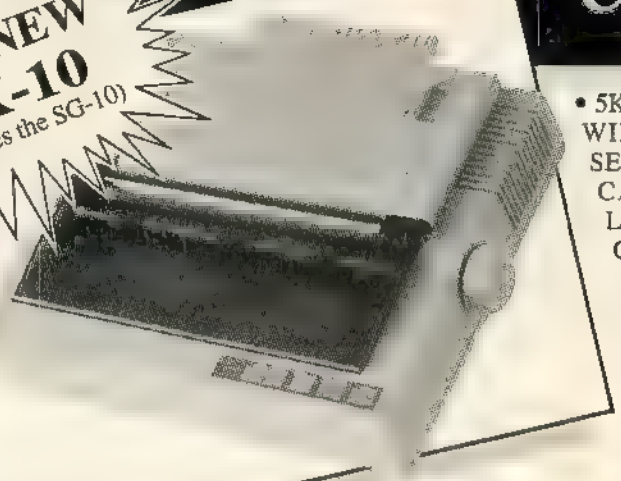

COMPLETE NX-10 PRINTER SYSTEM

• 5K BUFFER • IMPROVED NLQ • QUAD HIGH & WIDE PRINTING • EXTENDED CHARACTER SETS • 10 INTERNATIONAL FONTS • IN-THE-CASE ADJUSTABLE TRACTOR • REVERSE LINE & FORM FEEDS • 120 CPS (DRAFT) 30 CPS (LQ) • FONT CONTROL & MARGIN CONTROL FROM CONTROL PANEL • 1 YEAR WARRANTY SERVICEABLE NATIONWIDE • AUTOMATIC LINE CENTERING • LEFT OR RIGHT HAND JUSTIFYING • SINGLE SHEET PAPER FEED • 7 GRAPHICS MODES

COMPLETE SYSTEM
NX-10 • BLUE STREAK II • SUPER GEMPRINT
TYPE SELECTION/TUTORIAL • WORD PROCESSOR 2.2

$309.95 + $10 Shipping and Insurance

FREE WITH SYSTEM PURCHASE

Drayon's
WORD PROCESSOR 2.2
TAPE OR DISK VERSION

A feature packed program that turns your CoCo into an office machine. Create and save letters and documents with the Word processor tailored for the NX-10

BLUE STREAK II
SERIAL TO PARALLEL INTERFACE

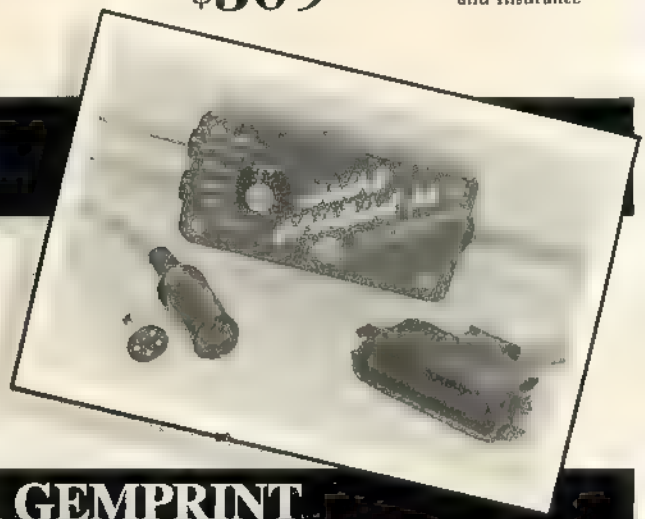

- RUN COCO I or II to PARALLEL PRINTER
- HIGH QUALITY TOGGLE SWITCH ELIMINATES CABLE SWITCHING
- 300, 600, 1200, 2400, 4800, 9600 SWITCHABLE BAUD RATES
- AC POWER OPTIONAL-NOT NEEDED WITH NX-10 PRINTER
- COMPLETE WITH ALL CABLES AND CONNECTORS
- THRU PUT EQUIVALENT TO BUFFERED INTERFACES
- 1 YEAR WARRANTY

RAINBOW

$54.95 SHIPPING PAID!

NEW VERSION FOR NX-10

SUPER GEMPRINT
CUSTOM SOFTWARE

"Overall, **Super Gemprint** is very well-written and documented."
—Rainbow December 84 review.

BONUS! TYPE SELECTION/TUTORIAL PROGRAM
FREE WITH SUPER GEMPRINT

Menu driven program for the CoCo. Teaches and shows the new user the numerous features of the **NX-10.**

SUPER GEMPRINT AND TYPE SELECTION/TUTORIAL PROGRAM **$17.95** + $2 Shipping and Handling

DAYTON ASSOCIATES, INC.

star microtics-inc
AUTHORIZED DEALER

DUN & BRADSTREET LISTED
7201 CLAIRCREST BLDG. C
DAYTON, OHIO 45424
OHIO RESIDENTS ADD 6% SALES TAX
C.O.D. ADD $2.00

AUTO•ORDER LINE
1-800-251 STAR
Personal Service
(513) 236-1454

RAINBOW REVIEWS

A2D Deluxe Joystick
Additional Control/*Cinsoft* 150
Adventure in Mythology
Clever Graphics Animation/*Saguaro Software* 139
CoCo Base I
Powerful and Full of Surprises/*JTJ Enterprises* 152
CoCo Keyboard
The 'Chiclet' Cure/*Spectrum Projects* 151
Computer Bankbook and Business Bankbook
Check It Out/*Sunrise Software* 144
Darkmoor Hold
Graphics Adventure or Fantasy Simulation/*Prickly-Pear Software* 135
Mailing List
Maintain Address and Telephone Files/*Data Information* 149
Master Disk
A Simple Program to Catalog Files/*Bob's Software* 150
Modem Pak
Basic Telecommunications Package/*Radio Shack* 146
Pinball Factory
Rings Up Points/*MichTron* 134
Portraits of Christ
The Gospel of John/*Sovereign Grace Software* 141
Rommel 3-D
Challenging, Fast Moving and Action Packed/*MichTron* 138
Salvdisk
Rescue Your Disks/*Free CoCo Software* 137
Skance
Take a Chance/*Bob's Software* 140
U-Buff
A No-Frills Printer Buffer/*Digital Services* 151
Wishbringer
A Stimulating Challenge/*Infocom* 148
Wizard's Castle
Great for Novices and Pros Alike/*Spectrum Projects* 136

Now from Falsoft, The RAINBOW MAKER, comes . . .

The monthly magazine that's reader-friendly

If you're interested in the highly popular Model 100, the Tandy 200, the brand new portable Tandy 600 or Tandy's new generation of MS-DOS computers — the 1000, 1200, 2000, or the exciting new Tandy 3000 — PCM is for you!

PCM, The Personal Computer Magazine for Tandy Computer Users, is brought to you by the same people who bring you THE RAINBOW, the premier magazine for the Color Computer Need we say more?

So, if you're ready to add portability or step up to MS-DOS, stay with Tandy and THE RAINBOW family by subscribing to PCM!

FREE PROGRAMS!

We learned from THE RAINBOW that readers want programs to type in, so each month we bring you an assortment of them, including games, utilities, business applications and graphics.

BAR CODE, TOO!

Also, PCM is the only computer publication in the world (that we know of) that brings you programs in bar code, ready to scan into memory with the sweep of a wand!

TUTORIALS GALORE

Add to this our regular tutorials on telecommunicating, hardware and machine language, as well as BASIC programming tips and product reviews, and we think you'll find we're one of the most informative and fun magazines on the market today.

So if you're ready to add portability or step up to MS-DOS, stay with Tandy and THE RAINBOW family through PCM.

To order by phone (*credit card orders only*) call 800-847-0309, 8 a.m to 5 p.m EST. For other inquiries call 502-228-4492.

☐ **YES! Please send me a one year (12 issues) subscription to PCM for only $28.* A savings of 22% off the newsstand price.**

For greater convenience, order a PCM subscription through the shopping area of the CoCo SIG at Delphi!

Name _____

Address _____

City _____ State _____ ZIP _____

In order to hold down costs, we do not bill.

☐ My check in the amount of _____ is enclosed.

Charge to my: ☐ VISA ☐ MasterCard ☐ American Express

Acct. # _____ Expiration Date _____

Signature _____

*Canadian subscribers U.S. $35 Surface rate elsewhere $64, airmail $85 Allow 6 to 8 weeks for first copy Kentucky residents add 5% sales tax U.S. currency *only*, please

Mail to: PCM, The Falsoft Building, P.O. Box 385, Prospect, KY 40059

RECEIVED & CERTIFIED

THE FOLLOWING PRODUCTS have recently been received by THE RAINBOW, examined by our magazine staff and approved for the *Rainbow Seal of Certification*, your assurance that we have seen the product and have ascertained that it is what it purports to be.

This month the *Seal of Certification* has been issued to:

Max Fonts, a collection of 72 fonts for use with the *CoCo Max* graphics program. Fonts can be typed onto the screen utilizing all of *CoCo Max*'s text style combinations such as bold, italics, outline, etc. Font names automatically appear in *CoCo Max*'s pull-down menu. ***Derringer Software Inc., P.O. Box 5300, Florence, SC 29502, disk of 24 fonts, $24.95; set of 3 disks, $64.95.***

Ultra Telepatch, a 64K program requiring one disk drive and *Telewriter-64*. This new version of *Telepatch* includes word delete, integrated type-ahead keyboard scan with buffer, in memory disk I/O menu with no loss of buffer memory and more. ***CMD Micro Computer Services Ltd., 10447-124 Street, Edmonton, Alberta, Canada T5N 1R7, $19.95 plus $2 S/H.***

The Last Word, a word processor that requires 64K and OS-9. Features pull-down menus, on-screen formatting and 22,000 word online dictionary. Edit files larger than memory, and define macros, pagination, headers and footers. ***Computerware, Box 668, Encinitas, CA 92024, disk $49.95 plus $2 S/H.***

L1 Utility Pak, an OS-9 productivity enhancement. Package contains Filter Kit #1, Filter Kit #2, Hacker's Kit #1 plus several new programs. ***D.P. Johnson, 7655 SW Cedarcrest Street, Portland, OR 97223, $49.95.***

Karate, a 64K game using karate kicks and punches to score points. Requires one or two joysticks depending on number of players. ***Diecom Products, 6715 Fifth Line, Milton, Ontario, Canada L9T 2X8, tape or disk, $28.95 U.S.; $38.95 Canada.***

Memory Bank, a 64K computer program that allows full use of the second 32K in 64K color computers. A RAM disk is also included that allows the second bank to be used for storing programs. Computer can be configured for the "all-RAM" mode, allowing modification of the BASIC, Extended or Disk ROMs, and placing a BASIC program in the upper 8K of memory. ***Dynamic Electronics Inc., P.O. Box 896, Hartselle, AL 35640, tape, $27.95; disk $29.95, plus $3 S/H.***

Physcho: 1, 64K games requiring one disk drive. Package of eight psychological exercises tests skills in observation, reaction time and memory. ***Lomiq, c.p. 105 Succursale A, Jonquire, Quebec, Canada G7X 7V8, $34 U.S., $45 Canada.***

DS-69/69A Digisector, an enhanced version of 64K video digitizer that accepts NTSC standard video input from a source such as closed-circuit television camera or videotape recorder and converts the analog video signal to digital data. ***Micro Works, P.O. Box 1110, Del Mar, CA 92014, $149.95.***

RESETCHG, a machine language program that changes the reset vector in 64K mode so when the Reset button is pressed, the CoCo stays in 64K mode. ***Neat-O-Software, Route 3, Box 205, Kingsport, TN 37664, tape $10 plus $2 S/H.***

Dragon Blade, a graphics Adventure game requiring 64K ECB and one disk drive. The scenario places you in a time of swords and sorcery, when only the bravest of men could destroy the foulest of beasts. Your quest for the legendary blade leads you to the Forest of Lore and it is from here that your Adventure begins. ***Prickly-Pear Software, 2640 N. Conestoga Avenue, Tucson, AZ 85749, $29.95.***

Wizard's Castle, a 64K graphics Adventure game requiring one disk drive. The objective is to save the princess by collecting 24 objects and returning them to the king. Your enemy is the wizard, who has the power to bring back to life the creatures you slay in the quest to save the princess. **Spectrum Projects, P.O. Box 21272, Woodhaven, NY 11421, $24.95 plus $3 S/H.**

CoCo Keyboard, a new Color Computer 2 keyboard to fit your old-style Color Computer (silver or white case), TDP-100 and older CoCo 2. Drops in with no soldering or cutting necessary. ***Spectrum Projects, P.O. Box 21272, Woodhaven, NY 11421, $14.95. Adaptor for 1982 and previous computer (D&E Boards), $9.95. Add $3 S/H.***

The *Seal of Certification* program is open to all manufacturers of products for the Tandy Color Computer, regardless of whether they advertise in THE RAINBOW.

By awarding a *Seal*, the magazine certifies the product does *exist* — that we have examined it and have a sample copy — but this *does not* constitute any guarantee of satisfaction. As soon as possible, these hardware or software items will be forwarded to THE RAINBOW's reviewers for evaluation.

— Judi Hutchinson

REVIEWING REVIEWS

Color LISP

Editor:

I must take exception with Mr Dooman's software review of *Color LISP* in the May 1986 RAINBOW. Mr. Dooman compares LISP to both FORTH and BASIC. These are numerical languages. BASIC is a good general purpose, data-processing programming language. FORTH is an extendable, fast interactive, compiled, stack-oriented control language. LISP is a symbolic manipulation language, extendable by user definitions.

Mr. Dooman complains about the documentation using brackets instead of parentheses. The documentation does not contain brackets in the examples — parentheses are used in all examples and all examples have been tested to ensure they function as described. Not one of our many customers have complained about "brackets."

As Mr. Dooman pointed out, there are no standards in LISP function syntax. In our implementation, the syntax of MAPCAR is: MAPCAR/list/function. In some other LISPs the syntax is: MAPCAR/function/list. The syntax can easily be changed to reverse the arguments simply by defining a new function such as: (DE MAPC (fns lis) (MAPCAR lis fns)). All examples in the documentation have been fully tested. The snytax is clearly stated with ample examples to illustrate the proper use. Also the complete function definitions are provided.

Mr. Dooman mentions none of the features of this implementation for the Color Computer such as: low resolution graphics, integrated into architecture of the Color Computer, joystick, sound, cassette functions, disk functions, printing, PEEK, POKE, JSR, firebutton, break, load and save LISP objects, load and save LISP work spaces, and long error messages. This implementation was especially designed to take advantage of the limited resources of the Color Computer. The stack and node area can be redefined to explore different areas of interest. EXPRs, FEXPRs, and machine language subroutines are supported.

Though LISP is an interactive language, this implementation has been optimized for both speed and size. We feel we have a good and reliable product which enables CoCo owners to experiment with a language used extensively in artificial intelligence. Our goal was to provide a powerful, flexible, extendable and reasonably priced software product.

Jim Bachman
Frost Byte

Super RAMdisk

Editor:

Thank you for reviewing the DISTO Super RAMdisk and giving it a fair shake [June 1986]. I would like to inform you that a "hardware" user's manual is now available. The OS-9 software and documentation has been upgraded to V2.0. Anyone who has a print spooler, or any other utility for my RAMdisk may contact CRC Inc., 10802 Lajeunesse, Montreal, Quebec, Canada for more details.

Tony DiStefano
DISTO

DeskMate

Editor:

In Mr. White's review of *DeskMate* for the CoCo in the May 1986 RAINBOW, he mentioned that the Calendar utility was not useful beyond 1999. If he were to enter his data as 4/25/2000 instead of 4/25/00 (which defaults to 1900), he would find the correct date in the correct year. You can use years as late as 9999.

Norman Koslow
Richmond, VA

TX Word Processor

Editor:

I am comparably new to the computer. I got started with the CoCo in August 1985 and ordered RAINBOW at that time.

Since I had purchased the CoCo primarily for word processing, the *TX Word Processor* in "Received and Certified" (November 1985, Page 188) caught my attention. I ordered it and, while waiting, I went to work on *Color Scripsit* as it came with the computer. After *TX* came, I made a quick change and found it so much better in every way. After your review that found *TX* juvenile [March 1986, Page 209], I tried still another word processor, but it too was difficult to run and had very poor documentation, so I went back to *TX* Version 01.08P. I feel your reviewer was over-educated for the job and I think the readers are getting shortchanged because of the review.

This is being written using *TX*, and it is still my favorite. I would like to see another review, preferably by an operator instead of a programmer. There are a lot of us out here who are beginners.

A.J. (Andy) Cryder
St. James City, FL

The Best Epson Screen Dump Utility

Editor:

My program, *The Best Epson Screen Dump Utility*, was reviewed by R.W. Odlin in a recent issue [February 1986, Page 216]. My thanks to your reviewer for taking the time to carefully test the program.

However, one comment in the review has left me scratching my head – that is the matter of pixels being swapped from left to right with *Graphicom* screens. The reviewer did not contact me regarding this problem, and I don't understand how it could happen. The sample printouts on the package are of *Graphicom* screens, and they certainly do not exhibit this problem.

I have no idea how Mr. Odlin loaded the *Graphicom* screens into memory, but if the GC>BIN utility (included with *Graphicom*) is used, I can assure your readers they will have no problem printing out pictures with *The Best Epson Screen Dump Utility*.

Bob van der Poel
CMD Micro Computer Services Ltd.

We welcome letters to "Reviewing Reviews" and remind you that they may also be sent to us through the MAIL section of our new Delphi CoCo SIG. From the CoCo SIG> prompt, pick MAIL, then type SEND and address to: EDITORS. Be sure to include your complete name and address.

RAINBOW ON TAPE

Those Great RAINBOW Programs Without All The Fuss! Subscribe to RAINBOW ON TAPE!

Every month, RAINBOW ON TAPE brings as many as two dozen ready-to-run programs right to you. Using the current issue of THE RAINBOW as documentation, all you have to do is load and run them. Just a one-year subscription gives you more than 230 new programs! The typing time saved is time that can be spent with the CoCo. (RAINBOW ON TAPE does not include OS-9 programs or those less than 20 lines.)

Need a back issue of RAINBOW ON TAPE?
Issues available beginning with April 1982

For greater convenience, order RAINBOW ON TAPE through the shopping area of the CoCo SIG of Delphi!

Subscribe to RAINBOW ON TAPE Today!

LOOK FOR OUR ORDER CARD BETWEEN PAGES 34 AND 35

The cost for a single copy of RAINBOW ON TAPE is $10 within the United States; U.S. $12 in all other countries. The annual subscription rate for RAINBOW ON TAPE is $80 within the U.S.; U.S. $90 in Canada; and U.S. $105 for all other countries. **U.S. currency *only*, please.** In order to hold down non-editorial costs, we do not bill.

NOW AVAILABLE ON DELPHI!

For your convenience, RAINBOW ON TAPE can also be ordered via the Delphi Information Network, in our Shopping Service area of THE RAINBOW's Color Computer SIG (Special Interest Group).

The individual programs from our past August issues are also available for immediate download in the RAINBOW ON TAPE Database area in THE RAINBOW's Color Computer SIG on Delphi. There is a $3.50 per program surcharge.

RAINBOW ON TAPE is not a stand-alone product, but is intended as an adjunct and complement to the magazine. Even if you purchase RAINBOW ON TAPE, you will still need the magazine for loading and operating instructions.

To order by phone, (*credit card orders only*) call 800-847-0309, 8 a.m. - 5 p.m. EST. All other inquiries call 502-228-4492.

Programs from Our Past Games Issues:

August 1985 — *Brotan the Blue*, a game based more on luck and risk than on skill; *Quest for the Falcon's Lair*, a game that lets you fight for Earth's freedom; *Random Mosaics*, a graphics program: *Soccer Instructor*, a text and graphics game instruction for soccer novices; *Operation Feedom*, a game to save captive scientists; *Hello*, a disk utility solution for the directory's too-speedy scroll, *Earthrot and Pageturn* graphics programs which simulate the spinning Earth; *A Caterpillar's Alphabet*, an educational game designed to teach the alphabet to preschoolers; *Oodles of Games for 4K*, six short games to amaze and amuse; *Amphibia*, an alien planet's moon base destination game; *Phone*, a home help program that showcases your phone messages; *Sir Eggbert Jumper*, a one-player game with a "swords and sorcery" theme; *Doghouse*, a short game to challenge visual reflexes of everyone from toddlers to adults; and *Vision*, a health education program that tests your eyesight.

August 1984 — *The Jungle*, a game of survival on safar without joysticks, *The Dragon's Gold*, climbing to the top of his lair is a very dangerous game; *Trapperr*, an error trapping utility; *M*A*S*H Trivia Quiz*, 200 questions to test your memory, *Instrument Flight Simulator*, a serious exercise in flight simulation; *IRA Projection*, a finance program to project IRA earnings: *The Trip*, a mix of Adventure and arcade-type games; *Stock Market*, second part of a tutorial on writing a Simulation; *Air Raid on the Keyboard*, a game to sharpen reflexes, *Olympics*, a graphics program that displays the universally known connecting rings, *Disk Drive Speed Check*, a disk utility, and *Expanding BASIC*, part II on enhancing DOS.

Software Review

Pinball Factory Rings Up Points

I've never been a big fan of computer pinball — until now. I've tried practically every CoCo pinball game on the market, and while most of them have been good, after a few games I would invariably become bored. After all, these games only offer the choice of a few playing fields, and even the most diehard pinball fan is sure to soon tire of playing the same game over and over and over.

Enter *Pinball Factory* from MichTron, a terrific new game which not only lets you play pinball on your CoCo, but lets you create your very own pinball game. *Pinball Factory* is similar to *Pinball Construction Set* on the Apple, and it puts new life into a very old game.

Pinball Factory comes on disk and is accompanied by a set of easy-to-read, complete instructions. I was glad to see that the disk was not copy protected and was accompanied by instructions on making a backup disk for your own use. Loading the game is as simple as putting the disk in the drive and typing RUN "PINBALL". After the title page appears, you have the option of playing the current game, loading a new game from disk (eight sample games come on the disk), modifying the current game or creating a new one, saving your creation to disk, or taking a directory of the pinball files on the disk. The program requires only one drive, but can use a second drive if you have one.

Load a game by moving the on-screen pointer with keyboard, mouse or joystick to the section of the screen marked LOAD and press ENTER (or the joystick button) then point to the file you want to load and press ENTER again. There is no need to type in the filename from the keyboard. Because the pinball data files are stored in a special format, they do not appear on the disk directory, and the manual warns not to save any other files on your pinball diskette.

Once loaded, selecting Play from the screen lets you play the current pinball game. You then have control of the two flippers and can "tilt" the board in one of three directions (left, right and up) to make the ball go where you want it. The graphics are in black and white only, but are quite good nonetheless. The animation is good and, except for a few rare moments, flicker-free. Sound effects are adequate, but not diverse. Pause and Quit options are provided.

The area in which *Pinball Factory* shines is in the creation and modification of your own pinball games. You can control the placement of everything except the flippers; you can even design your own high-resolution graphics logo for your pinball game. You can place bumpers of varying types around the board. When the ball hits one of these, you score a certain number of points — it is up to you how many points each type of bumper is worth, as well as how many points it takes to earn extra balls — and your ball is deflected back at a fast speed. There are even "multirail" bumpers which provide bonus points if all rails are hit. *Pinball Factory* also allows you to place polygons anywhere on the board. These polygons act only as physical obstructions, yielding no points and hindering the balls. They may be used to change the shape of the playing board or increase the challenge. Once placed, any object on the board can be removed or changed, and the program provides a test option for trying out your creation. Up to 90 objects may be put on the playing field.

Once the playing field is set up, you can change the rules of the game. This includes setting the speed, the pull of gravity on the ball, the number of balls, and the elasticity (which controls how fast the ball will bounce off an obstruction). As I mentioned before, you can also change the scoring rules, thus making the games harder or easier.

Overall, this is an excellent game. Unlike past pinball games, *Pinball Factory* puts you in control of the entire pinball game, letting you tailor games to your particular liking. You can even design pinball games with friends and have a pinball marathon or competition. Because *Pinball Factory* does not lock you into a particular game, it kept my interest, as I'm sure it will yours. The only minor bug I found was that the selection (menu) pointer scrolls off the screen in one direction but not the other, which was sometimes annoying, but doesn't affect game design or play.

Suggestions? MichTron could have included more features to build a pinball game from, such as ramps, optional flippers, moving targets, etc., or a feature to let the user design his own bumpers or polygons. Letting the user create his own sound effects or background music would have put the icing on the cake, but *Pinball Factory* is a most enjoyable game as it now stands.

On a scale of one to five, I would rate *Pinball Factory* as follows: playability, 5; sound effects, 3; keeps interest, 4; price vs. value, 3; graphics, 4; speed/animation, 4; documentation, 4; and overall rating, 4.

As a final note, I was impressed by the trust MichTron puts in their customers. Not only was the game able to be backed up, but MichTron offers a guarantee of satisfaction and a 30-day warranty. If you even remotely like pinball, I think you can trust that you'll enjoy *Pinball Factory*.

(MichTron, 576 S. Telegraph, Pontiac, MI 48053, 313-344-5700, 64K disk required, $34.95)

— Eric Tilenius

CoCo Cat

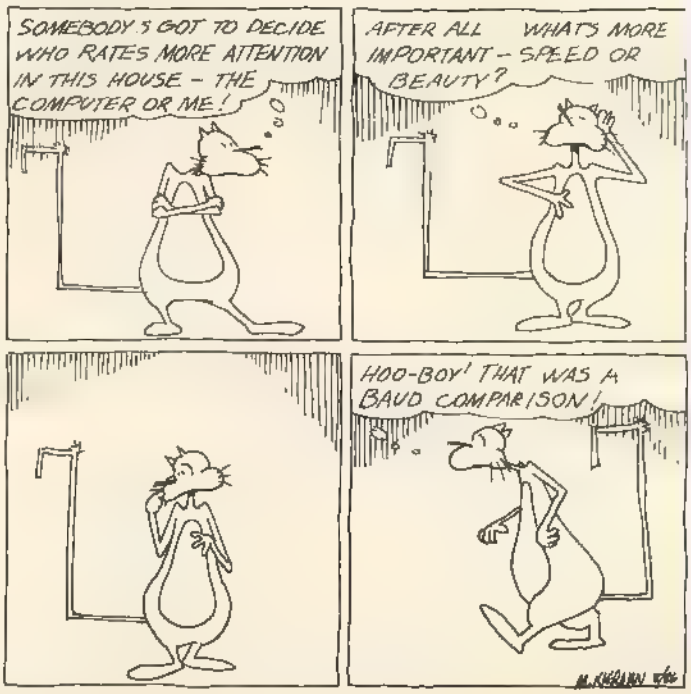

Darkmoor Hold: A Valuable Software Library Addition

Wandering through the dimly-lit corridors of a mysterious castle in search of adventure and riches is a daydream many of us romantics share. Until the CoCo came along, dreaming and reading were the extent of my fantasies. Now with software such as *Darkmoor Hold*, by Prickly-Pear, I can finally wander to my heart's content.

Darkmoor Hold is a graphics Adventure/Simulation that puts you, a human mercenary, in charge of a trio of adventurers hired by the ruler of a troubled kingdom. It seems an evil wizard is killing the king's beloved taxpayers and he would like you to remedy the situation. The wizard's castle, Darkmoor Hold, is comprised of 10 levels, each consisting of 20-plus rooms. You must survive all 10 levels while gathering better armament and treasure on the way. Since I was only able to get to level six, I can't testify as to what happens when you finally reach the wizard on the 10th level.

Darkmoor Hold has a different format than most Adventures on the market. In fact, it may be closer to a fantasy Simulation than an Adventure. The screen has the appearance of an ancient parchment scroll and is split into several parts. The top one-third shows a 3-D graphics representation of the rooms and corridors through which you wander. The bottom two-thirds is divided into three columns, allowing you to enter commands for each of the three adventurers. You, the human, a small but powerful Dwarf and a magical Elf make up the trio. The commands you can enter are predefined and consist of just under 20 choices. Examples are directions, search to find objects, fight to defend yourself and inventory. As my combat experience proved, 80 percent of the time you will find yourself entering fight. To call this game a slugfest would be putting it mildly. While I'm sure there are strategies to be developed, most of the time it's hard enough just staying alive.

Traveling through the various levels you face creatures of increasing power. On each level all the creatures look the same and only the Elf can correctly identify them. The graphics for the rooms and creatures are all very well-done and add considerably to the enjoyment of the game. In addition, for those of you who find spare time hard to come by, the game has a SAVE and LOAD feature allowing you to explore a little at a time.

The program is not copy protected, has a guaranteed free replacement for as long as you own it and is supported by some of the most considerate people I have ever done business with. There are many good companies selling CoCo software today and I can testify, without hesitation, that Prickly-Pear is one of the leaders.

I liked the program and would recommend it to any fantasy buff. I do feel, however, that the more experienced adventurers and role players out there might find the challenge a little too limited for their tastes. On the other hand, inexperienced adventurers who want a sample of Dungeon exploring, would do well to consider this program for their library.

(Prickly-Pear Software, 2640 N. Conestoga Ave., Tucson, AZ 85749, 64K ECB and one disk drive required, $29.95)

— Ken Boyle

Two-Liner Contest Winner . . .

This one allows you to enter the number of options on your gameboard's spinner. Then it will randomly select one. It might even eliminate those spats about how you "accidentally" bumped the spinner to alter the outcome

The listing:

```
1 CLS:PRINTTAB(5)"ELECTRONIC DIC
E":PRINTTAB(1Ø)"HOW MANY SIDES":
INPUT"ANY NUMBER PLEASE ";A:CLS:
PRINT"THE DICE ARE ROLLING":FORT
=1TO5Ø:SOUND25,1:NEXTT:C=RND(A):
CLS:PRINT"YOU ROLLED ";C:PRINT"O
UT OF A POSSIBLE ";A
2 PRINT:PRINT"PRESS ENTER FOR AN
OTHER ROLL":PRINT"TO END PRESS T
HE BREAK KEY":INPUTZ$:GOTO1
```

Aaron Newell
Orlando, FL

(For this winning two-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

WORKBASE

BUSINESS SOFTWARE

$ PORTFOLIO $

BUSINESS DATABASE SYSTEMS

★ Reviewed in HOT CoCo Dec. 1984 & RAINBOW Feb. 1985 ★

- DATABASE MANAGEMENT define, reorganized & update a database
- SPREAD SHEET – calculations to update database
- REPORT MODULE customized report formats with headings & totals
- WORD PROCESSOR merge database with custom letters, labels & reports
- MACRO PROCEDURES store any report calculations with sorts & selections
- UTILITIES generate, merge, summarize, & summarize-post
- 216 PAGE MANUAL WITH STEP-BY-STEP TUTORIAL
- WORKBASE I (600 Records) $49.95 WORKBASE II (1200 Records) $59.95

BUSINESS APPLICATION PACKAGES

- READY-TO-USE 50-page manual, database, calculations, & reports
- SELF-CONTAINED purchase & use any package independently
- BUILT-IN DATABASE FUNCTIONS select/verify/display/print records
- COMPREHENSIVE all major accounting functions addressed
- EASY TO USE – all packages are entirely menu driven
- EXPANDABLE use any application database with WORKBASE DATABASE
- PROVEN currently used in businesses, churches, and accounting firms
- COST EFFECTIVE $29.95 per package $24.95 when 2 or more purchased

★ INVENTORY CONTROL
★ SALES ORDER ENTRY
★ ACCOUNTS PAYABLE
★ PAYROLL
★ RENTAL PROPERTY
★ ACCOUNTS RECEIVABLE
★ GENERAL LEDGER
★ PURCHASE ORDER ENTRY
★ CHURCH MEMBERSHIP

ALL SOFTWARE REQUIRES 32K/64K TRS-80 CoCo & 1 DISK DRIVE

★ FREE CATALOG AVAILABLE ★

ORDERING: CHECK, MONEY ORDER, COD, MASTERCARD, VISA
Price includes shipping in USA
NC residents add 4.5% sales tax

WORKBASE DATA SYSTEMS
P.O. Box 3448
Durham, NC 27702
Call Toll Free 1-800-334-0854 ext 887
(919) 286-3445 NC Residents only

Wizard's Castle — Great for Novices and Pros Alike

If you remember those Saturday afternoons when you lay in front of the TV and watched the Good Guys save the Princess, you have the premise of *Wizard's Castle* in a nutshell. Don't let me fool you into thinking that it will be quite as easy as that, however. This is a very pleasantly frustrating game.

Wizard's Castle, a graphics Adventure game, comes with excellent documentation. It includes a list of verbs and nouns to use in playing the game. It also covers the creatures you have to kill in order to save the Princess. Remember the descriptions of these creatures or you may try to kill one that just might help you.

One of the frustrating things that makes this game hard is not only do you have to kill the creatures, but just when you think everything is fine, the wizard brings them back to life. Even if you manage to hack the wizard to death, he can come back to life, too. Some of the creatures, like the Orc, follow you around. Others, like the Gnome, will just take all your coins, laugh and leave.

One of the saving graces is the "eerie glow;" just when you think you're going to die, it surrounds you, rejuvenates you, and the game goes on. The game also includes a help function which, if you ask the right question, will give you clues. To keep it interesting the author used riddles for the clues.

The help you receive is dependent upon your status in the game. There are three variables in *Wizard's Castle* condition, score and experience. Condition is your physical strength and varies with how many dragons you've fought and how well you've done. In wandering around the kingdom you may find apples to eat or water to drink and they will boost your condition. And if you get lucky, the eerie glow will surround you and really give a push.

During your travels you find any of 24 different objects. If you can manage to get these back to the King, you are awarded points (either as score or experience, or both). Experience points can also be earned by actions like killing your enemies. Experience points are needed to be able to do some of the actions in the game. But, with more experience, you fall into more traps. You have the option of trading score for experience. The only thing I could not understand from the documentation was what the score points were for except buying experience.

There are three levels of play. In level one the creatures are a little easier to kill, points are easier to earn and it just seems you are luckier. Level three is hard; even moving through the game drains some of your strength away. The creatures are harder to kill, they're trickier, and traps pop up more often. The documentation states that level three should take about eight hours (or more) to play. The game is in real time, so even if you don't see a cyclops waiting when the screen comes up, don't sit still too long or he may come after you.

There are several nice features with this game, such as the Freeze command. To stop and think, you can enter FREEZE and the game is on hold until you want to play some more. You can also save the game you're playing onto the game disk to be able to pick up where you left off. *Wizard's Castle* will talk to you if you have a Radio Shack Sound/Speech Cartridge, but I didn't think it helped much (at least, it didn't tell me how to win). To quit, type UNCLE, and you can start all over.

Even though *I* never saved the Princess, I believe you will find *Wizard's Castle* well worth the money no matter what your level of expertise with Adventures. It is easy enough for those of us who play just for relaxation; and difficult enough for the die-hards who think they can master anything.

(Spectrum Projects Inc., P.O. Box 21272, 93-15 86th Drive, Woodhaven, NY 11421, $24.95 plus $3 S/H)

— Ruth Graham

64K CoCo Users!

IMAGINE A DOS THAT

► Is Configured for YOUR System
Allows up to 54K of Workspace
► Handles 40 & 80 Track Drives
& Double-sided Drives
► Simplifies Machine Language
with 90 System Calls
► Automatically Dates Files

HELP IS HERE WITH

SOS

►►► small (8K) operating system

PROGRAM DISK including FORMAT BACK UP & COPY UT . TIES with detailed USER'S MANUAL and 1 PATCH of your choice $49.95 plus $3.00 s/h add PATCHES $9.95 each
N residents add 6+ sales ta

PATCHES AVAILABLE FOR
● MICROWORKS: Editor/Assembler Disassembler & DCBUG
● COMPUTERWARE: Ed tor & MacroAssembler
● DUGGER'S GROWING SYSTEM: C 1 2 & 3 4
● ELITE SOFTWARE: Elite WORD
● DOUBLE DENSITY: Ch arm 3 3 & 4
● COGNITEC: Te ewriter 64 D & I
● RADIO SHACK: EDTASM+ & SCR PSIT or dges

REVIEWED IN MAY 986 RAINBOW

RAINBOW CERTIFICATION SEAL

PROGRAMMER'S REFERENCE GUIDE & DISK UTILITIES ALSO AVAILABLE $22.95 each

SOISTMANN ENTERPRISES, INC.

CALL OR WRITE SOISTMANN ENTERPRISES INC
P.O. BOX 257 BLOOMINGDALE N.J. 07828 (201) 347 0763
P.O. BOX 330 WEST BERLIN N.J. 08091 (609) 768 4183

Hint . . .

Disk Directory Printout

If you have a long disk directory and want to see all of it, or if you simply wish to have a hard copy printout of your directory, one simple command allows you to do this easily.

Just POKE 111,254:DIR and the entire disk directory will appear on your printer, even if it is too long to be fully displayed on the screen.

Rescue Your Disks with *Salvdisk*

Salvdisk (salvage disk) is a machine language utility for salvaging information from a damaged disk. It may be used with files consisting of BASIC, machine language programs or data. Using *Salvdisk*, you can copy one granule at a time to either another disk or a different granule on the same disk. After moving a file, you can modify the disk directory to use the data in its new location. *Salvdisk* requires a Color Computer with a disk drive and 32K of memory.

Salvdisk is supplied on a disk without the usual instructions. (But instructions *are* provided.) After doing the machine language LOADM "SALVDISK" and EXECuting, a title page (with copyright notice) appears. At this point, press any key to continue. The second screen asks whether you desire written instructions. If you respond with a 'Y', the program allows you to select the Baud rate, and the instructions are sent to the printer. If you're familiar with the program, this can be bypassed by responding with an 'N'

Having entered the main part of the program, you are given a choice to Load Granule, See Granule, Dump Granule, Alter Directory or Return to BASIC.

Load Granule reads the specified granule's contents into CoCo's memory. (Granules one through 68 store files; granules 69 and 70 comprise the directory.)

See Granule displays the contents of a previously loaded granule one sector (256 bytes) at a time. The display, however, is generally illegible — showing primarily graphics patterns and an occasional identifiable character.

Dump Granule allows you to write a previously loaded granule into a new granule of your choice. You may want to write it to the same granule number on another (undamaged) disk, or write it to an unused granule on the damaged disk.

Alter Directory allows you to update the directory after moving a granule (or granules) around. Without this step, the computer would not know where to look for the relocated file.

Return to BASIC allows you to test modifications without having to turn off the computer and accessories. This is convenient because a test file (called "try it") is created when you modify the directory. By using EXEC, RUN or read, you can confirm the correctness of your work.

Being a relative newcomer to the world of disks, I have not (yet) crashed a disk. But I know it's just a matter of time, so I welcomed the opportunity to review this program. Unfortunately, I was disappointed. In order to use *Salvdisk*, it is imperative to be able to identify the granules associated with each file. This task would be easy if I could use the program to read the contents of each sector and granule, but the resulting display when I "view" the granule is predominately graphics patterns with only rarely identifiable characters.

I tried this program with both binary and ASCII files without success. I called the author to discuss my difficulty, and he explained that this was normal. He also explained that determining the granules that contain a program is accomplished through trial and error. And to further complicate the salvage procedure, the granules must be relocated in correct order, while the order on the damaged disk is not necessarily consecutive — the granules comprising a program may be numbers 34, 35, 50 and 26. When salvaging these, they must be relocated in the correct sequence. In other words, I have to write granule 34 first, then 35, then 50, then 26 to consecutive granules on the new disk — 10, 11, 12 and 13, for example. And, the correct order can only be determined through trial and error.

I also tried, unsuccessfully, to identify the starting granule of the test program by reading the directory (using the read granule activity on granules 69 and 70, as specified in the instructions).

The two pages of instructions are neither complete nor well-written, but are sufficient to experiment with the program.

In summary, attempting to use this program reinforces the necessity of making frequent backups of critical disks. The distribution of *Salvdisk* is unique, in that the author has not set a price; rather, he will send you a copy of the program if you send him a formatted disk. When you execute the program, one of the opening screens explains that the author would appreciate a donation if you find *Salvdisk* useful.

(Free CoCo Software, P.O. Box 2231, Westover, WV 26502)

— Jerry Oefelein

BASIC COMPILER

WASATCHWARE believes that users of the Color Computer deserve the right to use all 64K of RAM that is available in the computer and have fast machine language programs that use the full potential of the 6809 microprocessor. That is why the BASIC compiler, called MLBASIC was developed. Here are some of the reasons that make this compiler one of the best bargains in this magazine:

- Use all 64k of RAM for program storage and/or variables
- 32 bit floating Point arithmetic expands 6nk with functions
- Full sequential and direct access disk files allowed
- BasIC source and M.L. output I/O to disk, tape or memory
- Many new commands that expand your programming capability

Commands Supported

1. I/O Commands
CLOSE CLOADM CSAVEM DIR DRIVE DSKI$ DSKO$ FIELD FILES
GET INPUT KILL LSET OPEN PRINT PUT RSET USING

2. Program Control Commands
CALL END EXEC FOR STEP NEXT GOSUB GOTO IF
THEN ELSE ERROR ON GO RETURN STOP SUBROUTINE

3. Math Functions
ABS ASC ATN COS CVN EOF EXP FIX INSTR
INT LEN LOG LOC LOF PEEK POINT PPOINT RND
SGN SIN SQR TAN TIMER VAL

4. String Functions
CHR$ INKEY$ LEFT$ MID$ MKN$ RIGHT$ STR$ STRING$

5. Graphic/Sound Commands
COLOR CLS CIRCLE DRAW LINE PAINT PCLEAR PCLS PLAY
PMODE PRESET PSET RESET SCREEN SET SOUND

6. Other/Special Commands
DATA DIM LLIST MOTOR POKE READ REM RESTORE RUN
TAB VERIFY OLD OSK LBSHFT LREG PCOPY PMODE PT
BEEP SREG SWP VECTD VECTI

Compiled Program Speed (Time in minutes seconds)

Program	Interpreter	MLBASIC
Eratosthenes Sieve	6 58 7	0 00 5
Matrix 5,11,Mult,Sub 10x10	1 30.9	0 02 6
String Manipulation	6 22 5	2 17 7
Floating Point	0 32 6	0 30 6
Disk I/O (2000 PRINT/INPUTs)	2 21 5	0 27 6

RAINBOW CERTIFICATION SEAL

DON'T HESITATE...BUY MLBASIC TODAY

Disk $69.95
Tape - $69.95
Both - $74.95

64 K REQUIRED

Include $4.00 Shipping and Handling
Utah residents add 5.75 % tax
Check or Money Orders Only (No C.O.D.)

WasatchWare
7350 Nutree Drive
Salt Lake City, UT
84121

CALL (801) 943-6263

NEW ADDRESS

SUMMER ROUNDUP

GRAPHIC ADVENTURE GAMES (disk only)

Darkmoor Hold	29.95
Dragon Blade	29.95
Hall of the King	39.95 +
Hall of the King II	39.95 +
Scepter of Ursea	24.95
To Preserve Quandic	34.95 +

(+ two disk adventure)

UTILITIES

Colorkit	29.95*
Disk Manager	19.95
Disk to Tape	19.95
Disk Zapper	29.95
Maillist (disk only)	29.95
Microartist	19.95*
Oracle	24.95
RomFree	19.95
RTD Trio	44.95

GRAPHIC SIMULATIONS/ARCADE

City War	19.95*
Flight	19.95*
Gravitor	14.95*
Jumbo Jet	19.95*
Warp Factor X	34.95

MISCELLANEOUS (disk only)

Airnav (flight plans)	59.95
Color Disk Trivia	24.95
Trivia Question disks	9.95
Lizpack (statistics)	175.00
Fantasy Gamer's Pack	19.95

GENEALOGY/ASTROLOGY

Family-Tree	24.95*
Super Astrology	19.95*

TEXT SIMULATIONS/ADVENTURES

Adventure in Wonderland	19.95*
Gangbusters	14.95*
Viking II	19.95*

EDUCATION

Mathpac	14.95*
Music Reader	29.95*
Phonics I & II	14.95*
Preread 1, 2, 3	14.95*
Spelling w/voice	19.95*

***ADD $5.00 FOR DISK VERSION**

PROTECTION POLICY — We believe our customers are honest — all of our software can be backed up using standard procedures
YOUR PERSONAL CHECK IS WELCOME — no delay. Include $1.50 for shipping for each order + $2.00 for COD. AZ residents add 5% sales tax. Orders shipped within two days.
DEALERS AND AUTHORS INQUIRES are always welcome. Canadian dealers should contact Kelly Software Dist. Ltd. P.O. Box 11932 Edmonton, Alberta T5J 3L1 (403) 421-8003

SUMMER SALES PRICES GOOD ON ORDERS RECEIVED BY AUGUST 31, 1986
SEND FOR OUR FREE CATALOG OF GREAT COCO PROGRAMS
FOR QUESTIONS OR ORDERS CALL (915) 584-7784

PRICKLY-PEAR SOFTWARE
QUALITY PROGRAMS FOR YOUR COCO

MasterCard VISA

SEND ORDER TO
PRICKLY PEAR SOFTWARE
213 LA MIRADA
EL PASO, TEXAS 79932

Action-Packed *Rommel 3-D* Requires Practice

With anxious hands, you hold the controls of your death machine in hopes of finding the enemy. The mission appears simple, but you know in your heart that this will be one of the harder missions you face.

Rommel 3-D is a game of speed and skill. You have a tank that must seek and destroy other tanks and planes trying to destroy you. As you destroy them, you receive points and if you gain enough points you receive bonus tanks. The challenge is to develop a strategy that enables you to increase your scores constantly.

A joystick is not needed to run the game. Use the arrows, or the 'P', 'L', 'W' or 'Q' keys to move and the space bar to fire the cannon. Scoring is accomplished by directly hitting the enemy tanks or planes. Points are given for hitting three different things: dumb tanks worth 1000 points, smart tanks worth 1500 points and planes worth 1300 points. You receive one bonus tank for every 10,000 points you get until 100,000 points after which it takes 20,000 points to get a bonus tank. On the screen you see flat land with mountains on the horizon. Scattered around this land are various obstacles you cannot move through. The enemy vehicles are three-dimensional tanks or airplanes in various colors. In the middle of the screen are the sights for your tank. They become smaller when an enemy tank or plane is in firing range. In the upper right hand corner there is a radar screen. Your tank is the center of that screen with other vehicles appearing as blips in relative position to you.

The only way to win at this game is to practice. If you get in trouble, move your tank backwards and to the left or right very fast and maybe you won't get hit. The only strategy that worked for to me was to keep moving.

When I played this game I got killed very fast at the beginning, but as I played I did get better slowly. The game is a challenge, fast moving and fun. If you are into action-packed war games then this game is worth looking at.

(MichTron, 576 S. Telegraph, Pontiac, Michigan 48053, 313-334-5700, 32K required, disk $29.95)

— Thomas E. Nedreberg

Amway Distributors - Cocoachiever software package drastically reduces time spent hassling with paperwork! Menue-driven - user friendly, assists in preparation and checking SA-1s or warehouse orders; verification of phoned-in orders; supplies monthly PV/BV totals and calculates monthly refunds. Has wholesale price list stock numbers; can add to or delete stock numbers or distributor files from memory. Required for operation: TRS-80 Color, 64K; Disk:1 - 5¼" ssdd; Printer: optional, PRICE: $49.95. Contact: T&M Enterprises, 2301 Cromwell Drive, St. Maries, ID 83861. Ph: 208-245-3944.

Clever Animation in *Adventure in Mythology*

Fans of graphics Adventure games will enjoy Saguaro oftware's new game, *Adventure In Mythology*. The 64K iachine-language game is available on tape or disk. The isk can be backed up, but the backup copy will not run. In loading the backup copy, you get a message that says ie files can be recopied to the original disk if necessary.

The game does not load from JDOS or from the disk ersion of ADOS. I had no problem with DECB 1.0. ccording to the instruction sheet, the game can be used ith the Tandy SSC Speech Sound Pak. But even without iat accessory, the game is not totally silent — there are its of music and sound effects built in.

Adventure In Mythology comes in a simple, yet most ttractive package. The instructions are short and to the oint.

The graphics are cleverly animated. For example, when ou are in a rain forest, you can actually see the rain coming own. If you have a key to open the castle door, you see t open up.

As the name of the game implies, the Adventure is based n the popular tales of ancient mythology. Among the haracters you encounter are King Minos, Ariadne, Icarus nd Galatea, just to name a few. "Your goal," we are told, is to win the hand of the beautiful Atalanta, the swift-unning huntress." I never got to meet her, though, because kept getting mugged by bandits, trapped in inescapable ooms, drowned in the ocean and tripped up in the darkness of the famous Labyrinth.

Like other games of this type, *Adventures In Mythology* an take many hours to play, so you'll find the ability to ave a game in progress and reload it later very handy. The isk actually allows ten different saves — so you can save ne game at several landmarks along the way. Then if you et killed, you can go back to any of those saved points and try again from that point.

(Saguaro Software, Box 1864, Telluride, CO 81435, tape $24.95, disk $27.95)

— Neil Parks

Hint . . .

What's Your ROM Version?

With all the talk about new ROMs, you may be wondering exactly which ROM you have. If you have an older CoCo with Extended BASIC, just read the version number of your Extended BASIC at the top of the screen on power up. Then, to see which Color BASIC ROM you have, type EXEC 41175 and press ENTER.

If you have the new ROMs, Extended BASIC will be Version 1.1 and Color BASIC will be Version 1.2.

On the CoCo 2, Color BASIC will always be Version 1.2 or 1.3 (which are functionally identical).

THE RAINBOW
THE COLOR COMPUTER MONTHLY MAGAZINE

Back Issue Availability

Back copies of many issues of **THE RAINBOW** are still available.

All back issues sell for the single issue cover price. In addition, there is a $3.50 charge for the first issue, plus 50 cents for each additional issue for postage and handling if sent by United Parcel Service. There is a $5 charge for the first issue, plus a $1 charge for each additional issue on orders sent by U.S. Mail. UPS *will not* deliver to a post office box or to another country.

Issues July 1981 through June 1982 are available on white paper in a reprint form. All others are in regular magazine form. VISA, MasterCard and American Express accepted. Kentucky residents please add 5 percent state sales tax. In order to hold down costs, we do not bill and no C.O.D. orders are accepted.

Due to heavy demand, we suggest you order the back issues you want now while supplies last.

To order, just fill out the form on the next page and mail it with your payment to:

THE RAINBOW
The Falsoft Building
P.O. Box 385
Prospect, KY 40059

For greater convenience, order RAINBOW back issues through the shopping area of the CoCo SIG at Delphi!

BACK ISSUE ORDER FORM

(See overleaf for instructions.)

(Payment must accompany back issue orders. We do not bill.)

☐ Please send me the following back issues

NO	MONTH YEAR		PRICE
		VOLUME 1	
1	JULY '81	PREMIER ISSUE	$2.00 ☐
2	AUG. '81		$2.00 ☐
3	SEPT '81	EDUCATION	$2.00 ☐
4	OCT '81	PRINTER	$2.00 ☐
5	NOV '81		$2.00 ☐
6	DEC. '81	HOLIDAY	$2.00 ☐
7	JAN '82		$2.00 ☐
8	FEB '82		$2.00 ☐
9	MAR '82		$2.50 ☐
10	APR '82		$2.50 ☐
12	JUNE '82		$2.50 ☐
		VOLUME 2	
11	JUNE '83	PRINTERS	$2.95 ☐
12	JULY '83	ANNIVERSARY	$2.95 ☐
		VOLUME 3	
1	AUG. '83	GAMES	$2.95 ☐
2	SEPT. '83	EDUCATION	$2.95 ☐
3	OCT '83	GRAPHICS	$3.95 ☐
4	NOV '83	DATA COMM	$3.95 ☐
5	DEC. '83	HOLIDAY	$3.95 ☐
8	MAR '84	BUSINESS	$3.95 ☐
9	APR. '84	GAMING	$3.95 ☐
10	MAY '84	PRINTER	$3.95 ☐
11	JUNE '84	MUSIC	$3.95 ☐
12	JULY '84	ANNIVERSARY	$3.95 ☐
		VOLUME 4	
1	AUG. '84	GAMES	$3.95 ☐
2	SEPT. '84	EDUCATION	$3.95 ☐
3	OCT '84	GRAPHICS	$3.95 ☐
4	NOV '84	DATA COMM.	$3.95 ☐
5	DEC '84	HOLIDAY	$3.95 ☐
6	JAN '85	BEGINNERS	$3.95 ☐
7	FEB '85	UTILITIES	$3.95 ☐
8	MAR '85	BUSINESS	$3.95 ☐
9	APR '85	SIMULATIONS	$3.95 ☐
10	MAY '85	PRINTER	$3.95 ☐
11	JUNE '85	MUSIC	$3.95 ☐
12	JULY '85	ANNIVERSARY	$3.95 ☐
		VOLUME 5	
1	AUG. '85	GAMES	$3.95 ☐
2	SEPT. '85	EDUCATION	$3.95 ☐
3	OCT '85	GRAPHICS	$3.95 ☐
4	NOV '85	DATA COMM	$3.95 ☐
6	JAN '86	BEGINNERS	$3.95 ☐
7	FEB '86	UTILITIES	$3.95 ☐
8	MAR '86	BUSINESS	$3.95 ☐
9	APR '86	HOME HELP	$3.95 ☐
10	MAY '86	PRINTER	$3.95 ☐
11	JUNE '86	MUSIC	$3.95 ☐
12	JULY '86	ANNIVERSARY	$3.95 ☐
		VOLUME 6	
1	AUG. '86	GAMES	$3.95 ☐

RAINBOW INDEX A complete index to our first three years, July 1981 through June 1984, is printed in its entirety in our July 1984 issue. Separately bound copies are also available. $2.50 ☐

Note: Our Fourth and Fifth Year Indexes, including RAINBOW ON TAPE indexes, are included in the July 1985 and 1986 issues, respectively.

TOTAL _____

KY RESIDENTS ADD 5% _____

U.S. MAIL CHARGE
SHIPPING & HANDLING
U.P.S. CHARGE _____

TOTAL AMOUNT ENCLOSED _____

Name _____

Address _____

City _____ **State** _____ **ZIP** _____

☐ **Payment Enclosed, or charge to my:**

☐ **VISA** ☐ **MC** ☐ **AE**

CARD # _____

EXPIRATION DATE _____ **PHONE #** _____

SIGNATURE _____

To order by phone (*credit card orders only*) call (800) 847-0309, 8 a.m. to 5 p.m. EST. All other inquiries call (502) 228-4492.

Take a Chance — Play *Skance*

Do you like games of chance such as Yahtzee or dice? Do you like to go one-on-one with your computer and sometimes win? If so, you're a likely candidate for *Skance*.

The program is written entirely in BASIC and requires a 16K CoCo with Extended Color BASIC.

When I ran the program, the instructions were simple and straightforward. Besides the instruction screen, there are four other screens you will use: The Player Screen lists all of the players, the Score Screen shows the current scores, the Dice Screen shows the dice being rolled and the Winner Screen gives the winner's name and score.

After the instructions, you are asked how many people will be playing. Up to four people can play or you can play against the computer.

The object of the game is to score as many points as possible. To score, you need to stop rolling the dice before your point number comes up a second time. Your point number is the first number you rolled.

The game consists of seven rounds of play. After the seventh round, the winner's screen comes up and displays the winner's name and score. Although the computer keeps track of all players' scores and who is playing, once a player begins rolling the dice, there is nothing displayed on the screen to tell the players who is rolling. We found this to be a problem.

After you decide how many people are going to play, the screen indicates whose turn it is. There are two options: press the 'A' to roll the dice or press the 'S' to see the current scores. If the 'A' is pressed, a screen comes up showing two dice. After each roll, you are given three choices: roll again, see score, or next player. These are chosen with the 'A', 'S' and 'N' keys. If any other key is pressed, your turn ends and the next player is up.

This game requires no skill to play, but if you like games of chance, this may be for you.

(Bob's Software, P.O. Box 391, Cleveland, OH 44107, send formatted disk and return postage.)

— John H. Appel

One-Liner Contest Winner . . .

Here is a tricky one. Use your joystick to move the racer through the course. Watch out for the obstacles!

The listing:

```
Ø POKE65495,Ø:CLSØ:A=1248:B=9:C=
128:FORT=ØTOA*A:POKE1472+RND(3Ø)
,96:D=2-RND(3):FORS=ØTO4:B=B+D:B
=B-(B=Ø)+(B=19):POKER,C:R=JOYSTK
(Ø)/2+A:PRINTSTRING$(B," ")STRIN
G$(13,CHR$(C)):IFPEEK(R)=C THENP
OKER,86:NEXTS,T ELSECLS4:PRINT"T
IME="T;:PLAY"O1L3G2":RUN
```

Lonnie McClusky
Toney, AL

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

Portraits of Christ Presents the Gospel of John

Get out your copy of *2010* by Arthur C. Clarke and you'll see in the introduction he reveals that the entire text of this novel was mailed from Sri Lanka to New York on a single diskette. He was heralding the arrival of the age of technology. Now, in the same tradition, is the book I received for review from Sovereign Grace Software, *Portraits of Christ*.

Two CoCo-formatted diskettes contain ASCII text files which can be loaded by your word processor and read on-screen or printed out. Both the documentation and an introductory file explain the screen and printer formatting necessary for proper hyphenation and paging. Using *Telewriter*, all files loaded without a hitch. Following the formatting parameters produced a well-organized screen layout of 63 characters per line and a printout properly paged and aligned. (A call to the author, Pastor Mark Camp, indicated that the disks now contain a program *A Print*, that can be run to get a hardcopy without a word processor of your own.) There are 21 chapters plus a title page and disk information file.

The book is essentially a discussion of the New Testament Gospel of John. It presents the idea that a unique aspect of Jesus Christ is emphasized in each chapter of John. Sample titles include "Jesus Christ — Consoler" and "Jesus Christ — King."

In the 15th century, the Spanish mystic Fray Luis de Leon published a work called *Los Nombres de Dios* (The Names of God) which approached the idea with the same method for the entire Bible. But *Portraits of Christ* is not just a theological discussion. The nature of *Portraits of Christ* can be accurately described as fundamental Christianity. Its stated purpose is evangelical.

I got the feeling that each chapter may have originally been a sermon delivered by its author. Each chapter concludes by directly addressing the reader to encourage a decision of a spiritual nature.

To sum up this offering by Sovereign Grace Software without bias, it is a literate, well-prepared presentation of the Gospel of John written for the purpose of teaching about the nature of Jesus Christ from a perspective of evangelical, Protestant Christianity.

Pastor Camp told me that he would like $10 for the two-disk set but admitted he is willing to accept donations of any amount as well. He is, not surprisingly, more interested in spreading the word than reaping profit.

(Sovereign Grace Software, 221 Highview Dr., Ballwin, MO 63011, 64K disk $10)

— Dennis A. Church

★★★★★★ SELECTED SOFTWARE ★★★★★★

SOLDERLESS UPGRADE KITS
With easy-to-follow instructions

64K FOR E BOARD	$39.95
64K FOR F BOARD	$29.95
64K FOR COCO2* (ALL MODELS)	$29.95

*All Korean models require one solder joint

NOTE: All ICs used in our kits are first quality 150 NS prime chips and carry one full year warranty

BASIC ROMs DISASSEMBLY

COLOR BASIC UNRAVELLED	$17.95
EXTENDED BASIC UNRAVELLED	$17.95
DISK BASIC UNRAVELLED	$17.95
ALL 3 BOOKS	ONLY $39.95
ULTRA 80C DISK EDITOR ASSEMBLER	$29.95
BUG OUT & THE ORACLE (M.L. Monitor)	$14.95
ALL 5 ITEMS	ONLY $59.95
500 POKES, PEEKS, 'N EXECS	$16.95
UTILITY ROUTINE (VOLUME 1)	$19.95
WITH ROUTINES ON TAPE OR DISK	$36.95
ASSEMBLY LANGUAGE PROGRAMMING (TEPCO)	$16.95
ALL 9 ITEMS	ONLY $119.95

COCO MAX tape only	$64.95
COCO MAX II disk only	$74.95
Y BRANCHING CABLE	$27.95
DS-69A DIGISECTOR & C-SEE III SOFTWARE	$149.95
HJL-57 KEYBOARD	$69.95
VOLKS MODEM	$54.95
THE INTRONICS EPROM Programmer	
Program up to 64K Eprom	$139.95
DATARASE (Eprom Eraser)	$39.95
2764 HIGH SPEED COMPATIBLE	$5.95
27128 HIGH SPEED COMPATIBLE	$7.95
ROM PACK P.C. BOARD	
with case for 27xx	$9.95
TEAC 55B DS/DD Half Height Drive	$109.95
CASE AND POWER SUPPLY	$49.00
NEW J & M DISK CONTROLLER	
with J Dos 1.2	$129.00
DISKETTE CAROUSEL	$24.95
ZENITH ZVM-123 GREEN	$99.00
ZENITH ZVM-122 AMBER	$109.00
VIDEO PLUS	$24.95
VIDEO PLUS IC	$34.95
VIDEO PLUS IC	$34.95
REAL TALKER I	
With 3 talking games	$49.95
REAL TALKER II	
With 3 talking games	$54.95
NUMBER PACK THE HJL Numeric Key Pad	$79.95

WIZARD'S CASTLE
64K Graphic Adventure
by Spectral Associates
Disk only $19.95

Top 5 Spectral Associates games in one package!
Galagon, Lancer, Cubix, Froggie & Lunar Rover Patrol
for only $34.95 tape or disk

Take a closer look. . .

	TAPE	DISK		TAPE	DISK
DYNACALC		$74.95	P51 MUSTANG	$23.95	$27.95
PROCOLOR FILE 20		$49.95	SAILOR MAN (64K)	$23.95	$27.95
MASTER DESIGN		$29.95	WORLDS OF FLIGHT	$23.95	$28.35
TELEWRITER 64	$39.95	$49.95	DRAGON SLAYER		$23.95
SUPER SCREEN MACHINE	$35.95	$38.95	SR-71	$23.15	$24.75
RAINBOW SCREEN MACHINE	$23.95	$26.95	BUZZARD BAIT	$19.95	$22.95
PEN PAL		$84.95	GALAGON	$16.95	$18.95
AUTOTERM	$31.95	$39.95	LUNAR ROVER PATROL	$16.95	$18.95
ADOS		$27.95	MS GOBBLER	$16.95	$16.95
SUPER BACKUP UTILITY		$44.95	LANCER	$16.95	$18.95
THE PEEPER WITH SOURCE	$24.95	$26.95	CUBIX	$16.95	$18.95
GRAPHICOM		$19.95	FROGGIE	$16.95	$18.95
BEST OF COCO TIME 85	$26.95	$26.95	SPACE PAC (10 M.L. GAMES)	$21.95	$21.95
UTILITIES BONANZA		$29.95	EDUCATIONAL PAC (6 PROGRAMS)	$19.95	$19.95
DISK UTILITIES 2.1A		$24.95	ADVENTURE PAC (5 GAMES)	$19.95	$19.95
TELEPATCH I		$29.95	TREASURY PAC (30 GAMES)	$29.95	$29.95

WE PAY SHIPPING in the United States, Canada & Mexico. Overseas please add 10%. (MN Residents add 6% sales tax.) We accept Visa, Mastercard, check or money order. U.S. funds only for foreign orders. C.O.D. please add $2.00 (USA only).

Send to: **SELECTED SOFTWARE**
P.O. Box 32228, Fridley, MN 55432
24 HOUR ORDER LINE 612-757-2439
INFORMATION 612-757-1026 (8 A.M. - 5 P.M. C.S.T.)
SAME DAY SHIPPING BEFORE 1 P.M. C.S.T.

NEW DISK DRIVES

STARTING AT

$ 89.95

WITH CASE & POWER SUPPLY

$129.95

TANDON MPI TEAC

Speed 6 ms tk to tk and up
Capacity 250k unformatted
Tracks 40
Warranty **now 1 YEAR**

New Low Price



40 or 80 Tracks
1/2 Hght Teac, Panasonic

CALL FOR SALE PRICES

We carry only the finest quality disk drives • no seconds • no surplus

SATISFACTION GUARANTEED!! ALL DRIVES FULLY TESTED&WARRANTEED

Complete Disk Drive with Power Supply & Case ..... Teac $129.95

Two Drives in Dual Case & Power Supply .... Teac ~~$279.95~~ CALL

1/2 ht double sided double density Disk Drives (Panasonic/Teac) **$ $119.95**

1/2 ht double sided double density Disk Drive with ps&case ~~$199.95~~ CALL

How to use your new drive system on audio cassette

Single ps&case $44.95 Dual 1/2 ht ps&case ....$54.95 Dual ps&case. **Call**

Color Computer Controller (J&M) **$129.95**

DRIVE Ø FOR RADIO SHACK COLOR COMPUTER
TANDON, MPI OR TEAC DRIVE (SINGLE SIDED 40 TRACKS SPEED 5 MS TRK TO TRK & UP)
POWER SUPPLY and CASE TWO DRIVE CABLE WITH ALL GOLD CONNECTORS
J&M CONTROLLER, MANUAL and DOCUMENTATION ..... ~~$249.95~~ ..... $ SALE!

BUY THE BEST FOR LESS! CALL!

DRIVE Ø FOR RADIO SHACK COLOR COMPUTER
PANASONIC 1/2 HEIGHT DOUBLE SIDED DOUBLE DENSITY DRIVE 500K unformatted
POWER SUPPLY and CASE, 2 DRIVE CABLE WITH ALL GOLD CONNECTORS
J&M CONTROLLER, MANUAL and DOCUMENTATION ..... ~~$279.95~~ ..... Super!! SALE!

TAKE ADDED SAVINGS ON TWO DRIVE SYSTEMS

10 D skettes
DISKETTES with free library case $17.95
Unadvertised Specials ..... $Call
Drives cleaned, aligned & tested. $29.95

TECHNICAL STAFF ON DUTY, PLEASE CALL FOR ASSISTANCE

CALL US TODAY!! **617 278-6555**
ORDER TOLL FREE **1-800-635-0300**

*DEALER INQUIRIES INVITED
617-278-6555

TRUE DATA PRODUCTS

9 SOUTH MAIN ST
UXBRIDGE, MASS. 01569
617-278-6555
HOURS MON SAT 9-6 (EST)

We welcome
- Visa/Master Charge
- Checks (allow 2 weeks for clearing)
- C.O.D. Add $2.00

New Hard Drives

---------- COMPLETE SYSTEM ---------- JUST PLUG IN ----------

Call For
BEST PRICE

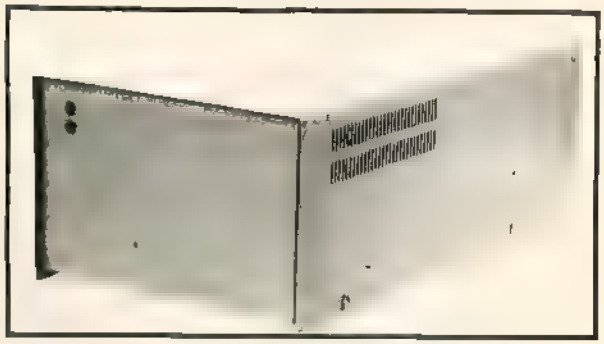

Warranty - One Full Year

5 to 20 Megabyte, ready to run on the TRS 80 Model I/III/IV/4P, color computer,

64K UPGRADES $19.95

VIDEO DRIVER $24.95
ENABLES YOUR COCO TO OPERATE WITH A VIDEO MONITOR INSTEAD OF A TELEVISION!

Panasonic 1091 Printer 239.95
1091 Printer & SP3 & Screen Dump 299.95

star PRINTERS

PRINTER CABLES AND INTERFACES AVAILABLE
Call for current pricing

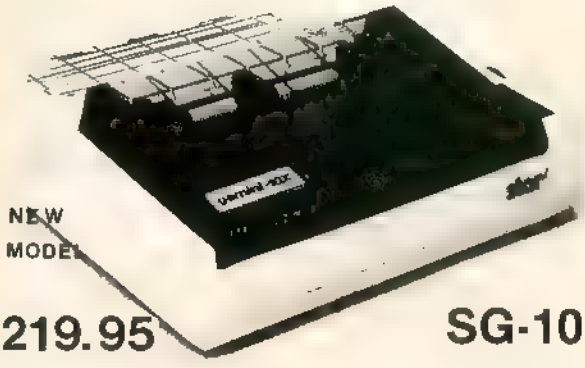

NEW MODEL

$219.95 SG-10

IBM XT COMPATIBLE



call for low price

SCREEN DUMP PROGRAM

The best screen dump program for the Epson & Gemini printers ever!! Have the option of standard images reverse w/regular or double sized pictures $19.95

SP-3 INTERFACE for Color Computer
- 300-19,200 BAUD rates
- External to printer — No AC Plugs
- Built in modem/printer switch—no need for Y-cables or plugging/unplugging cables

Only:
$54.95

COMPLETE SYSTEM
299.95 NEW LOW PRICE
now with screen dump

Nothing more to buy!

Dealer inquiries invited

TRUE DATA PRODUCTS
9 SOUTH MAIN ST.
UXBRIDGE, MASS. 01569

CALL US TODAY!! 617-278-6555
ORDER TOLL FREE 1-800-635-0300

Check out *Computer* and *Business Bankbook*

By Neil Parks

Sunrise Software has two new programs available that not only serve as check registers, but also print checks. If you pay the same creditors every month, this could prove to be a real work saver.

Computer Bankbook is designed for home users. *Business Bankbook* — available in two versions — is a similar program designed for business users. Both programs are 100 percent BASIC and come on disks that can be backed up. Both come with a "code plug." This bit of hardware plugs into the right joystick port, and without it the program is unable to run.

Since *Computer Bankbook* is a BASIC program with no machine code, it should be compatible with all operating systems, but it isn't. The disk I tested appeared to run properly under JDOS, but certain data fields, which I wanted to leave empty (as permitted by the program), were filled with random garbage. Attempts to edit the data via the program's edit routine resulted in various crashes and/or loss of entries.

GRAFPLOT

NEW! — THE BEST JUST GOT BETTER!

GRAFPLOT DEMO: $5.00 DISK & TAPE REFUND W/PURCHASE "A GREAT PACKAGE GETS EVEN BETTER" - RAINBOW

30 DAY UNCONDITIONAL MONEY-BACK GUARANTEE!!

RAINBOW

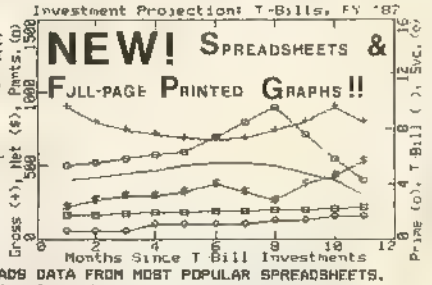

* AUTOMATICALLY LOADS DATA FROM MOST POPULAR SPREADSHEETS.
* 291 GRAPHING SYMBOLS AND UNLIMITED OVERLAY OF DATA.
* AUTOMATICALLY SCALES AND LABELS ALL THREE OF THE AXES.
* CALCULATES MATH FUNCTIONS, INTEGRALS AND MOVING AVERAGES.
* FULLY AUTOMATIC, MENU DRIVEN W/ COMPLETE ERROR TRAPPING.
* FULL-PAGE SCREENPRINTS ON ANY PRINTER: SPECIFY WITH ORDER.

REQUIRES 32K EXT. BASIC: TAPE - $40.00 DISK - $45.00

NEW!! PRINTER Picture Perfect NEW!! UTILITY

UNIVERSAL SCREENPRINT PROGRAM

* GET "PICTURE PERFECT" FULL-PAGE PRINTOUTS EVERY TIME!
* "PERFECTLY SIMPLE" TO OPERATE - "SIMPLY PERFECT" RESULTS
* "PERFECTLY COMPATIBLE" WITH ALL DOT MATRIX PRINTERS!
* GET "PERFECT CONTROL" OF: HEIGHT, WIDTH, POSITION, BAUD RATE, DOT DENSITY, NEGATIVE IMAGES, ETC.
* THE "PERFECT SOLUTION" TO YOUR GRAPHICS PRINTING NEEDS!
* COMPATIBLE WITH GRAPHICOM AND COCO MAX PICTURES!

→ ONLY $25.00 ON DISK OR TAPE ←

BUY BOTH PROGRAMS & SAVE $10.00

CALL NOW FOR FREE INFORMATION (415) 547-7557, OR WRITE:

HAWKES RESEARCH SERVICES: 959 STANFORD AVE, OAKLAND, CA 94608
YOUR PERSONAL CHECK IS WELCOME! SHIPMENT WITHIN 48 HOURS
ADD $3.00 SHIPPING ON ALL ORDERS. CA. RESIDENTS ADD SALES TAX

I had no problems with DECB 1.0 or the disk version of ADOS, so I presume that the problem with JDOS is caused by differences in direct-access disk formatting, but I don't know. Copying the program to a JDOS-formatted disk did not help.

The program ends by cold-starting the computer (POKE 113,0:EXEC 40999). With the disk version of ADOS, there is garbage on the screen, but pressing the Reset button restores the built-in DOS. *Computer Bankbook* is a natural for ADOS's RSV high-resolution text screen — or would be, but for some superfluous semicolons which should be removed from the menu-printing routines. The Edit screens actually work much better with RSV than they do with the regular 32-by-16 display.

The eight-page manual is well-written and easy to understand, though a couple of points were left out that probably should have been mentioned.

The first step in setting up the check register is to enter a beginning balance. Although there are only seven items on the main menu, the beginning balance is selected by pressing '8'. That was probably done because, after entering the balance, you won't use that routine again for a year.

There are two ways to enter checks. If you are going to have the computer print your checks, you use the Check Printer routine. When each check is printed, it is automatically entered into the register. For creditors you pay on a regular basis, enter their names and addresses into a file. Then every time you want to send a check to one of those creditors, you call up that file. Enter the last check number used, and the check or checks printed are properly numbered.

There is also the option of special checks, for which the name and address of the payee is not stored in the file.

The second method of entering checks in the register is also the method for entering deposits — the Add Checks/Deposits Manually selection. The manual suggests that you may wish to use the Check Printer routine in preference over the Add Manually option even if you don't plan to have the computer print your checks. Personally, I disagree. I found the Add Manually option much easier to use.

(The manual says that if you wish to use the Check Printer routine without actually printing checks, you must change one line from a GOSUB to a REM. What they forgot to mention is that this change affects only the regular checks, not the special ones.)

Although the manual doesn't make it clear, all checks and deposits must be entered with a two-digit month. For example, January 25 has to be 01/25, not 1/25. If you enter the month with only one digit, the entry is accepted, and the check is printed properly. But the routine that prints out the transactions for a particular month keys on those two digits, so any entry with a one-digit month is omitted from the listing.

The day can go either way — 12/4 and 12/04 are equally acceptable. The year is optional. Although the *Computer Bankbook* manual doesn't expressly say so, it becomes obvious that one year is the maximum length for the file, because the printout for one month doesn't key on the year.

All entries for a given month must be consecutive. Otherwise, the balance column in the printout for that month will look strange. This may cause a slight problem if you write a lot of checks early in the month, before you get your statement and find out how much interest you

arned for the preceding month. But you can always date he interest deposit as of the first of the new month to get .round that. Again, this is a point that should have been nentioned in the manual but wasn't.

Each check is considered to be outstanding until you ndicate, either on entry or editing, that it should be canceled cleared). When you get your monthly statement from the ank, just print out a list of outstanding checks. A total will e printed with it. Add that total to the present balance and, f it agrees with the bank's balance, you've made balancing our checkbook quick and easy. (Deposits are considered anceled on entry, but you can always edit one to outstanding if it occurred too recently to be on the bank statement.)

Each check and deposit may be assigned an account umber. Here's where the program really proves its value. You can print out a list of transactions for each account umber, for any one month or for the entire file, and the ist will be automatically totaled. For example, let's say all your checks for charitable organizations are assigned to account 18. Tax time comes and you want a total of charitable contributions — it's as easy as printing out account 18 for the year. For this feature alone, *Computer Bankbook* is well worth twenty bucks.

There are a few quibbles, albeit minor ones. Author James Goldsberry did not make allowances for writing a check larger than $999.99. The program can handle it, but the printout looks strange because it exceeds the "print using" format. (Four-figure deposits and balances look OK.)

There is a slight inconsistency in those routines that require a Y/N response. In some of them, the ENTER key is interpreted as Yes, in others as No, and in yet others as no response. Obviously the third situation is the most desirable and should have applied in all cases.

When you enter the beginning balance (via menu option 8), I suggest you enter the amount as zero. Then, as your first transaction, post a deposit in the amount of the balance. Use the edit function to change the name from "deposit" to "beginning balance" or "balance forward" or whatever. That way, if you ever need to recall the file for a prior year, you don't have to make any adjustment to the beginning balance. This method lets you use the same disk for more than one checking account at the same time — your personal account, your spouse's account, a joint account, etc. When you finish working with each account, just copy the CHECKS.INF file to a library disk under the name of your choice, and recall the one wanted by killing CHECKS.INF on the system disk and copying the appropriate file in its place. You can have several years for several accounts stored on one library disk. That makes more sense to me than creating a new system disk for each account file, as the standard procedure would require.

Business Bankbook is essentially the same program, with a few added features. The main difference is that instead of assigning each transaction to one account, you can assign up to four accounts. So if an invoice includes merchandise cost, freight and tax, for example, each of these components can be posted to its own account. Enter the amount for each account, and the total is calculated automatically.

Business Bankbook comes in two different versions. System I (also known as Bank 7.1 or 7.3) uses one disk drive. System II (alias Bank 9.1 or 9.3) assumes two drives — one for the system disk and one for data storage. The beginning balance entry appears on the menu in *Business Bankbook*, but works the same as in *Computer Bankbook*. (With System II, my alternative method of the zero beginning balance becomes even more useful: You don't even have to kill and copy files to go from one to another. Just rename the appropriate file on the data disk to or from CHECKS.INF.)

The 10-page manual for *Business Bankbook* was apparently written some time after the other one, because it does mention that each file should contain one fiscal year, and it does not suggest using the check printer routine to enter checks without printing them.

I did not test *Business Bankbook* under the non-Tandy operating systems, but since the two programs use similar direct-access disk I/O routines, I would expect the results of such a test to be the same as they were for *Computer Bankbook*.

Business Bankbook allows you to enter a table of Active Accounts, consisting of any account numbers you regularly use, and a name for each account. This chart can be printed out at any time, and will appear in numerical order even if you didn't enter them in order. Also, the account names in the table appear on the check vouchers.

Unfortunately, there are two bugs in this routine. In the Edit mode, you are asked if you want to change the account number or account name. But any change in the account name erroneously produces a random change in the number, and any attempt to change the number fails. Also, if you use an account number that is not in the table, the check printing routine puts an inappropriate name in instead of a blank space. There is one line on the System I program that says RUN BANK.10. However, BANK.10 is a file which occurs only in System II. Somebody didn't debug as thoroughly as he should have.

On the plus side, by the time *Business Bankbook* was written, Mr. Goldsberry corrected the inconsistency in his Y/N routines, so that only a 'Y' or an 'N' would be accepted as a response.

Business Bankbook also has a routine called Convert that allows you to convert your *Computer Bankbook* files to the *Business Bankbook* format if you want to upgrade. The *Business Bankbook* manual says that a *Computer Bankbook* file of about 300 records takes seven granules of disk space. After conversion to the *Business Bankbook* format, the same data occupies eleven grans.

The manuals for both *Computer Bankbook* and *Business Bankbook* state that the check printing routines are expressly designed for use with Nebs Computer Forms tractor feed checks #9025-1, and that Line Printer VII, DMP-100, and possibly other inexpensive printers can't handle such heavy paper.

With each program comes a checklist to fill out and send in if you have occasion to write to Sunrise Software. "Please outline the problem you encountered in as much detail as possible," says Sunrise. "We will do all we can to help you solve it." I like that.

(Sunrise Software, 8906 NW 26 St., Sunrise, FL 33322, *Computer Bankbook*, 32K, one disk, $19.95; *Business Bankbook*, specify System I for one drive or System II for two drives, $49.95; $2 S/H)

New Modem Pak is 'Interesting'

The new Modem Pak from Radio Shack is quite an interesting piece of equipment. As a hardware item it exhibits a concept that is very useful to the Color Computer user. Imagine, a modem you just plug into your CoCo's cartridge port.

Those who have learned the hard way and upgraded from Commodore to the CoCo may remember the old Vic modem. This new modem from Tandy goes a bit further than that one, though. The old Vic modem required the use of a tone capable telephone with a removable handset. The Modem Pak works with either a tone or rotary line and is direct-connect. Just plug the modem into the phone outlet and dial the number with your family phone.

The Modem Pak is a good, basic telecommunications package all wrapped into one small plastic case. It includes the interface to its internal 300 Baud modem via a 6551 ACIA. It also includes communications software in ROM.

The Modem Pak is very easy to operate. If you are using the Multi-Pak Interface, you can put the Modem Pak in slot one, two or three, and then set the selector for the appropriate slot. If you are not using the MPI, just plug the Pak right into the side of the CoCo. Then plug the unit into the phone line, type EXEC &HC000 and you are ready to go. A menu of options appears on the screen. If you press the space bar, a second menu appears. Press it again to return to the first menu.

Several options are included in addition to the standard parameter options. Besides being able to alter the standard communications parameters, you can adjust the printer Baud rate, Xmodem timeout, cassette and printer buffer sizes, and turn the ASCII filter on or off.

The internal software lets you switch the printer Baud rate between 600 and 1200 Baud. Unfortunately, it does not allow you to go any higher than this. My printer likes to operate at 9600 Baud.

The Modem Pak does allow the use of the Xmodem protocol for file transfer. However, any files to be transmitted must be in ASCII format. Also, there is no provision for the user to supply addresses if he or she wishes to save a machine-language program from the buffer to a tape. I found this implementation of Xmodem to be very awkward, primitive and limited. It would still be advisable for users of this product to transfer files using the ASCII transfer method, which seems to be pretty reliable.

ANALOG AND DIGITAL I/O PORTS

6809 Processor, 2K Eprom & 8K Static Ram
Interfaces directly to I/O Port 48K Ram expansion board.

SINGLE BOARD 6809 CPU

Parallel 8 bit input & output for your CoCo, and Mode s 1 III 4

• MODULAR DESIGN FOR ADDITION OF MULTIPLE PORTS

SINGLE BOARDS (Requires 5V Supply)

I/O port kit (J107K)	$35
A-D/D-A Interface (J202K)*	$35
CoCo Adapter-required for CoCo (J110K)	$15
5 Volt Power Supply D100K)	$25
Relay Array Kit (J027K,	$32
*requires J107K I/O Port kit	
Stand Alone 6809 CPU Board (MX 90)	$40
48 K Static Ram Board (MS 468)	$52

COMPLETE SYSTEMS

DIGITAL MEMORY SCOPE– Converts the CoCo TV display into an oscilloscope screen *Maximum Sample Rate 10 khz

DIGITAL RECORDER and DELAY—Record and play back audio signals up to ten seconds (S102M, $159.00

2716 EPROM Programmer–Programs and verifies from CoCo's memory (S103M) $149.00

D & A Research
400 Wilson Avenue
Satellite Beach, FL 32937
305/777-7853

The ASCII filter option is very useful. When this optic is turned on, all control characters are stripped from tl transmitted data. Any characters over 80 Hex are filtere out. If you want to transmit data containing graphics cod or special key codes, just set this option to "off."

A very interesting feature of the Modem Pak is its "dua combined" buffer. When communicating, there are tw buffers; a cassette buffer for data you may want to save an a printer buffer for sending data to the printer. The tot. combined buffer space may not be more than 28K, but yo can use any configuration of cassette and printer buffer size not exceeding this limit. I found that, under most circum stances, a printer buffer size of 1K is more than enough The only time data stays in this buffer is if the printer offline. Otherwise, if the printer function is turned on, a received data is immediately sent to the printer as well a the screen. This is great for getting a hard copy while online

With the cassette buffer, you may save or load data t or from tape, clear the buffer, or view its contents. Thes features are very useful additions to transmitting data fror or receiving data into the buffer. They will benefit mos users.

A feature that will benefit CoCo owners with 'B' revisio CoCo 2s is the true lowercase option. If your CoCo is se up to use the new VDG Tandy has been using, the Moden Pak can recognize this and be set so that you get true lower case during communications.

One thing I thought was poor was the lack of suppor for disk systems. As it stands, the Modem Pak works only with tape-based systems. This is because the software i ROM makes it very difficult to work with the disk. The uni is set up so it can operate under OS-9 version 2.00.00 provided you have the M1 or M2 driver and the appropriate descriptor installed. In this case, it will work with a disk system. Who knows? Maybe Tandy has some future terminal package software plans in mind. It sure would be nice, however, to use this package under Disk Basic.

The ROM based operating software of the Modem Pak is much enhanced over that included in the Deluxe RS-232 Pak. The unit itself is a great step in the right direction. However, I feel certain additional features would have increased the value of this product. For instance, inclusion of an RS-232 jack on the side would have allowed use with external modems. Along with this, Tandy might have included a provision for altering the communications Baud rate when using an external modem. With prices dropping, many people are going the extra bit and buying 1200 Baud modems. It is a shame they won't be able to use them with the Modem Pak. Also, I feel the inclusion of what Tandy calls Xmodem is nothing more than a waste of good ROM space. They might as well have left this "feature" out.

Despite any shortcomings, the Modem Pak is a well-built piece of equipment. The documentation is more than adequate and covers all phases of operation. In their usual style, Tandy has included the schematic and programming examples for controlling the modem in BASIC or assembly language. I can recommend this unit for those who do a moderate amount of telecommunicating. Its relatively low price far outweighs its shortcomings for these people. I'll give the Modem Pak a three-star rating on my four-star scale.

(Tandy Corp., available in Radio Shack stores nationwide, $89.95)

— Cray Augsburg

ARK ROYAL GAMES

NEW!!!!

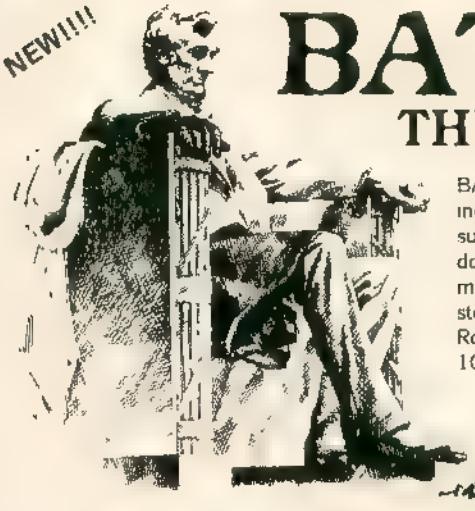

BATTLE HYMN
THE BATTLE OF GETTYSBURG

BATTLE HYMN The Battle of Gettysburg. Command Lee's army of 39 Divisions, including Stuart's cavalry brigades, and infantry division under the command of such famous names as Johnson, Heth, McLaws, Hood, Early and Pickett. Try to do what the real Confederates couldn't: destroy Mead's army at Gettysburg New movement and turn structure, form lines, rally, limber and unlimber cannon, backstep and do your best to outflank the Union line at Culp's Hill, Devil's Den or Big Round top Historical, with an Ark Royal touch. Available also on the IBM PC (Tandy 1000) Graphics are hi res, game is machine language throughout. **$29.00**

NEW!!!!

ADVENTURE ISLAND

ADVENTURE ISLAND (32K) Coco, disk only. Your plane has crashed on a deserted island and you must use all of your wits to stay alive. Beautiful half-screen picture graphics take you through jungle and beach in this fun-filled machine language adventure. Comes on two disks. **$23.00**

Disk only SAGA-THE SORCERER S CURSE 32K 100% hi-res, 100% ML graphic adventure. Fantastic!—$22

Disk only! REDSTAR 32K 100% hi-res 100% ML. Futuristic wargame involving NATO and the WARSAW PACT.—$22

BARBAROSSA 64K 100% hi-res 100% ML game of the war in Russia 1941-1944. "A Blockbuster," says Hot Coco's Peter Pap askas. Reviewed Jan '86 Hot Coco.—$25 (Tandy 1000)

D-DAY Our second 64K 100% hi-res 100% ML, this one dealing with the Allies invasion of France in 1944. Massive! No review date set yet.—$23

PHALANX 32K 100% hi-res, 100% ML game of Alexander the Great. No review date set yet.—$20

ANZIO 32K Semigraphic wargame. 1 or 2 players. Simultaneous movement. No review date set yet.—$20

COMPANY COMMANDER 32K ML routines. Tactical squad level wargame set in WWII. 12 scenarios, add-on expansion modules. Dec. '85 Rainbow.—$23 disk or tape

RIVER CROSSING 32K ML routines. A Company Commander add-on module, but you no longer need C/C to play it.—$23

CINCPAC BATTLE OF MIDWAY 32K 100% hi-res 75% ML. The battle that turned the tide of war. Aug. '85 Rainbow.—$20

ESCAPE FROM DENNA 32K ML routines. Semigraphic Dungeon adventure game. No review date set yet.—$18

BATTLE OF THE BULGE 32K Semigraphic wargame. 1 or 2 players. Aug. '85 Rainbow.—$15

BATTLE FOR TUNIS 32K Semigraphic wargame. 1 or 2 players. Sept. '85 Rainbow.—$15

ACROSS THE RUBICON 32K Semigraphic wargame. Feb. '84 Rainbow.—$15

WATERLOO 32K ML routines. Semigraphic wargame. Mar. '84 Rainbow.—$15

KAMIKAZE 32K Hi-res graphic wargame. Apr. '83 Rainbow.—$15

BOMBER COMMAND 32K disk, 16K tape. Semigraphic wargame. ML routines. Jan. '84 Rainbow.—$10

GUADALCANAL 32K Semigraphic wargame. ML routines.—$10

ARK ROYAL GAMES

Prices on all programs include shipping to U.S., APO's, Canada. COD's (USA only) add 10% Florida Residents add 5%. For disk version add $2 All Orders shipped within 24 hours. Programs require Color Computer TM (Tandy Corp.) or TDP System 100 Computer TM (RCA). Many programs soon to be available on MS-DOS systems.

P. O. Box 14806
Jacksonville, FL 32238
(904) 786-8603

Interactive *Wishbringer* — A Stimulating Challenge

On a scale of one to 10, I'd give *Wishbringer* 9.95+ points. *Wishbringer* is an interactive fantasy — you interact with the program to create a story with many possible solutions. Unlike many Adventure games, which accept only two-word phrases (typically a verb and object), *Wishbringer* encourages you to talk to it in complete — even compound — sentences. Every aspect of this package has been carefully designed and implemented.

To enjoy this fantasy, you need a CoCo 2 with 64K of memory and a disk drive. Optional items include a second disk drive and a printer.

The object of this fantasy is to free the seaside village of Festeron of trolls, vultures and fortress-like towers. At the fantasy's beginning, you are a postal clerk, with the task of delivering a strange-looking letter to the local Magick Shoppe. When you succeed in reaching the shop, you learn that the proprietor's cat has been kidnapped by the Evil One. She asks you to rescue her cat, and in return she will give you a stone with magical powers — Wishbringer. Upon leaving the Magick Shoppe, you discover that the once quiet and peaceful village has become a battleground between the forces of good and evil. Only you, with the magical assistance of Wishbringer, can rid the town of its evil inhabitants.

The documentation supplied with this program is superb. The 25-page, color instruction manual contains the legend of Wishbringer and complete operating instructions. Suggestions are presented for the novice, and even a sample script is included to illustrate how the fantasy develops. Instructions are given to save a position in the fantasy and to restore to that point. Additional instructions allow you to send the actual script you create to the printer. Appendices describe system commands, list some recognized verbs, explain error messages (called Wishbringer Complaints), and present copyright and warranty information. Appendix G gives a brief biography of the fantasy's originator, Brian Moriarty.

But the documentation doesn't stop with the superb manual. Also included is a poster-sized postal map (also in color) of Festeron, showing the roads and identifying many of the buildings (but not the Magick Shoppe). A reference card summarizes much of the information presented in the manual. It also details a diagnostic procedure which will check if the story data are correct (complete and undamaged). (This allows you to determine whether a problem is hardware- or software-related.)

Still another piece of documentation is the sealed letter you are to deliver to the Magick Shoppe. You open this only when instructed by the fantasy to do so.

The packaging is excellent. In addition to the documentation, Infocom has included a warranty registration card (submitting this card gets you a complimentary subscription to the New Zork Times newsletter) and several pieces of advertising literature. One of these announces the availability of hints and maps for purchase.

Although I am past the age that is so fascinated with games, I really enjoyed doing this review. I was constantly challenged and frequently surprised as the fantasy evolved. The documentation left nothing to my imagination (except, of course, the fantasy itself). Response was quick, and often revealed the author's sense of humor.

(Infocom, available in Radio Shack stores nationwide, disk $34.95)

— Jerry Oefelein

Formaker

clean paperwork for business

Totally Menu Driven
Customize with company information
Complete "on screen" instructions

FORMS:	STORES:	FIGURES:
invoice	complete forms	quantity
quote	item list	list
purchase order	subquotes	net
mail order	letters	discount
confirm order	footnotes	subtotals
receipt	customer info	tax, etc.

SEPARATE CONFIGURE PROGRAM:
for company info
quote & inv. #
w/auto sequencing
auto date

PRINTS:
letterhead
envelope
multiple copy
emphasized

$49 32k ECB disc

"You have to look good to the customer . . . This program helps . . . by providing neat, well-prepared forms . . ."
The RAINBOW, May 1986

send for more information:

Challenger Software
42 4th Street
Pennsburg, PA 18073
Call (215) 679-8792 (Evenings)

RAINBOW CERTIFICATION SEAL

Two-Liner Contest Winner . . .

Pick Me is rather interesting, but you'll have to type it in to find out what it does.

The listing:

```
5 CLEAR5ØØ:PMODE4,1:SCREEN1,Ø:PC
LS:DRAW"BM71,1Ø8;C1;L4H4U12E28R6
4F28D12G4L4;BM92,Ø;D65R64U64;BM1
84,96;R15E5U7L12H8L15;BM8Ø,16Ø;D
12U6R6U6D12R1CØR4C1U12R12D12L12R
13CØR16C1U12D6R6U6D12R1CØR4C1U12
D12R6U12D12R1CØR4C1U12F4E4D12"
1Ø N$="D12RD1ØRD8RD7RD6R12U7RU8R
U1ØRU12H4L12G4":K$="UEU2E2U2E2U2
R11D2F2D2F2D2F":FORY=88TO1Ø4 STE
P16:FORX=71TO155 STEP28:C=INT(Y/
1Ø4):Z=ABS(Y-192):DRAW"BM=X;,=Z;
CØ;"+N$+K$+"BM=X;,=Y;C1;"+N$+"C=
C;"+K$:NEXTX:NEXTY:GOTO1Ø
```

Tim Buck
Akron, OH

(For this winning two-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

Keep in Touch with *Mailing List/Data Information*

A number of mailing list programs, capable of storing addresses and printing on self-sticking labels have been available over the years. *Mailing List/Data Information* by Crockett Software, offers several unique features that make it attractive. It can store and sort a large number of addresses, store additional data for each address, sort by number or letter, and can rapidly search using key words or numbers.

My review copy of this program arrived on cassette tape which is easily converted for disk operation. I would strongly recommend disk operation because of the ease of computer/disk interaction versus the difficulty of storing and updating data on tape. The program requires a slight change in a statement (AO$=DISK from TAPE) to convert to disk. The programmer did an excellent job in making the program so easily convertible.

Mailing List/Data Information contains two programs. The first, *PCEXT* must be run first if you have Extended BASIC to condition the computer. Then run *GEMLIST* which is the operating program. The program runs on 16K or 64K systems with or without Extended BASIC. The number of files available is limited by RAM size. Two hundred files are available for 64K.

The manual is well-written with good, easily followed instructions. It contains a useful appendix of states and commonly used abbreviations, a tapedisk routine for converting tape data files to disk and a merge program for combining two or more records.

On running the program, the user is given the option of creating records or loading recorded data. Input is in the form of a name, three address lines and three data lines. The name is entered with last name first, but a print option allows it to be printed first name first. Commas may not be used. One may use all or a part of the address lines. The data lines, which are not printed for labels, are useful for telephone numbers, occupation names or other descriptive information. This is particularly useful in the search routine where you can call out by address or data item.

The program locates records by I.D. number, name or any term used. It sorts files by file number, name or ZIP code. It also allows editing of all input for changes of address or any input data changes. Files may be reviewed at varying rates of scrolling.

Storing files is easily accomplished using the Record command. Retrieval is facilitated by an automatic DIR which displays stored filenames.

Printing can be for all addresses and data or addresses alone. When printing labels, the Address Only option is used. The program prints two self-stick labels across a page, or single labels. It also prints on one-inch or one-and-one-half-inch labels. One minor irritation was a printed statement following label printout of the number of labels printed, which wasted a label and upset the spacing for more labels. I eliminated that irritant by changing Line 66 in *GEMLIST*.

Need your plumber but can't remember his name? Locate the file with "Plumber" in the data. It would also be useful for Church or other organization mailing lists, small businesses (or larger ones), anywhere you want to file and maintain names, addresses, and pertinent data.

As far as program limitations are concerned, it will store up to 200 records for a 64K system. However you can maintain several 200 record files on a disk by simply using a different filename for each one.

I would recommend this program for maintaining your address and telephone files. It is the best that I have seen because of its speed and multifeatured capability, particularly the Locate and Sort capability.

(Crockett Software, P.O. Box 1221, St. Ann, MO 63074, tape or disk $29.95)

— Mel Siegel

Visit the CoCo Community Center THE RAINBOW'S CoCo SIG on DELPHI

J&R ELECTRONICS

Complete 256K and 512K Memory Expansion Systems
Hardware, Software and documentation included
User friendly software, programming not required

Easy, Solderless Installation

★ We have eliminated the necessity to piggyback for 512K versions! ★

RAMDISK — Fast disk I/O. 35, 40 track, two RAM drives with 512K,

PCOPYMOR — More than 30 PMODE 4 screens in memory at once. PCOPY command modified to accept PCOPY 1 to 128. More than 70 PMODE 4 screens and PCOPY 1 to 302 with 512K versions (or 30 PMODE 4 screens with one RAMDISK)

SPOOLER — HUGE printer buffer for offline storage inside your computer while the printer's busy. Customizable from 30K to over 200K (500K with 512K versions). Buffer can be turned off/on copied using simple PRINT CHRS commands

PAGER — Load multiple BASIC programs into memory at once! 8 (16 with 512K versions) pages of 32K with a PAGE command added to BASIC. Page PEEKs and POKEs access data in other Pages. 4 (8 with 512K versions) pages of 64K in 64K mode. Fully commented source code provided for this one!

Plus various utilities and demos. Detailed documentation, programs, system memory usage and a lot more included.

OS9 Ramdisk — Fast OS-9 disk I/O! 35, 40 track single sided or 40 track double sided (512K) Ramdisk under OS9. GOOD's OS9 Ramdisk, Rainbow Feb 86) with fully commented source code and install files added by J&R. Requires OS9 operating system

All software above is configurable for 256K/512K operation.
Software shipped on disk, add $10.00 for software on tape
(OS9 RAMDISK not available on tape)
All boards below are 256K, 512K capable, software & documentation included
New SAM (74LS785) not included (use your 74LS783, 74LS785 recommended for 2.0 MHz operation

Part number	Price	Description
#100	$39.95	Banker I bare board (with long pin socket, does not include memory Expansion Board)
#1002	$69.95	Banker II bare board + parts (does not include Memory Expansion Board)
#1004	$129.95	Banker II (256K upgradable to 512K) assembled & tested with memory
#1005	$169.95	Banker II (512K) assembled & tested with memory
#1008	$15.00	Memory Expansion Board
#1007	$29.95	Memory Expansion Board + parts
#9000	$89.95	Down Under Controller. Ram Pack size controller with BDOS. Gold plated high reliability edge connectors, jumpers for 24/28 pin ROM. Compatible with COCO I and COCO II
#9001	$35.00	BDOS (Enhanced DOS on 27128 EPROM)
#9002	$5.00	64K switch
#9003	$19.95	Banker I software pack
#9004	$24.95	New SAM 74LS785 (required only for 2.0 MHz operation)

To place an order write to J&R Electronics P.O. Box 2572, Columbia, MD 21045 OR call (301) 987-9067 or (301) 788-0861

HOURS: Weekdays 7 p.m.-9 p.m. Sat. Noon-5 p.m. EASTERN TIME

Add $4.00 shipping & handling (FOREIGN ORDERS $7.00) COD charge $3.00. Maryland residents add 5% state tax

CHECKS, MONEY ORDERS OR COD's only please, personal check — 2 weeks for clearance, IMMEDIATE DELIVERY. Give COCO Radio Shack model # (i.e. 26-3136) Disk or Tape when ordering

QUANTITY DISCOUNT AVAILABLE. For information on shipping or previously placed orders call (301) 788-0861. COCO I, 26-31XX owners call (soldering experience may be required)

A2D Deluxe Joystick: What More Could You Ask?

The A2D Joystick is slightly larger than the standard CoCo joysticks I'm used to. It's about the size and shape of other deluxe joysticks on the market, which is to say just about right. It appears to be well and sturdily constructed. The firebutton has more "throw" than the run-of-the-mill model, and has a very positive action.

Unobtrusively tucked away on the bottom of the case are two small dial-type switches that control the modes of operation. A flip of a switch allows self-centering operation or free-floating operation. The two axes are controlled independently, so the horizontal can be free-floating while the vertical is self-centering (or visa-versa).

The mechanical trim adjustment for each axis is accomplished by way of two slide switch mechanisms located on the top of the case. These slides are stiff enough to prevent accidental adjustment. To test the operation of these trims, I wrote a short BASIC program to display the integer (zero to 63) returned by JOYSTK(0) thru JOYSTK(3), as determined by the positions of the horizontal and vertical axes of both joysticks. In the free-floating mode, centering the trim control allows the full range of zero to 63. Maximum trim adjustment shifts these values by approximately 23 (zero to 40 or 23 to 63). In the self-centering mode, the trim allows adjustment of the "position" returned to by the centering mechanism. The centering mechanism seems to be very precise. Once adjusted to a certain number with the trim adjustment, the centering always returns to that number.

Using the same program mentioned above, I tested the A2D against the common garden variety RS joystick. With the RS it was difficult to move smoothly one number at a time. It was also difficult to stop on a chosen number - I got the feeling that a sneeze two doors down might change the display from 39 to 40. With the A2D, however, one step at a time was a breeze. In free-floating mode I could stop on 39 and set the joystick down on the desk without affecting the display. This level of precision must be an advantage for any application. *CoCo Max* came immediately to mind. While I was not able to test it with *CoCo Max*, I'm certain the additional control offered by the A2D would be very helpful with a system which allows joystick control of the entire 256 by 192 Hi-Res screen.

A2D: what more could you ask of a joystick?

(Cinsoft, 2235 Losantiville Ave., Cincinnati, OH 45237, $27.50)

— Stanley Townsend

See You at RAINBOWfest-Princeton October 17 - 19

Master Disk — A Simple Program to Catalog Files

Master Disk assists in cataloging all your disk files. It requires 32K and is based on a program by Paul Selig in the December 1983 issue of THE RAINBOW. *Master Disk* will create, sort and save a disk library of filenames. It can hold up to 18 directories or 250 program names in a single file. Multiple files can be created so you can catalog all your disk files.

After correcting four bugs, I found this program easy to use, and it does its job well. The bugs were minor and probably caused by the author trying to strip out spaces, etc. I have reported these to the author and I'm sure they will be cleaned up by the time you read this review.

Master Disk is menu driven and provides good on-screen prompts. There are two menus. The main menu allows you to create a new directory or recall an existing directory. The activity menu allows you to add to file, find a selected program, review entire file, or save to disk. *Master Disk* will record the disk filename and extension and the disk name (up to nine characters) for each file.

Reports can only be printed to the screen. When looking at the screen reports, 10 files are displayed at a time.

There is no hard copy documentation with this program. There are enough on-screen instructions to satisfy that need. There is no information supplied with the program to indicate what size CoCo is needed.

If you are looking for a simple program to catalog disk files, then this may be the one. But you may be disappointed if you're looking for something that is sophisticated and has lots of features.

Master Disk is a freeware program, so the most you're out is postage if you don't like it.

(Bob's Software, P.O. Box 391, Cleveland, OH 44127, send blank formatted disk and return postage)

— Michael Hunt

One-Liner Contest Winner . . .

Use the 'P' and the '@' keys to maneuver your racer around the course. Upon running the program, enter a number from one to 15 at the L prompt to enter the skill level (level one is most difficult).

The listing:

```
1 PRINTK"KM":INPUT"L";D:K=Ø:CLS:
PRINT@288,STRING$(192,46);:P=16-
D/2:C=1359:FORB=ØTO1:B=Ø:K=K+1:B
$=INKEY$:PRINT@48Ø+P,"#"STRING$(
D,46)"#":IFPEEK(C)=96THEN1ELSEPO
KEC,42:C=C+(B$="P")-(B$="@"):P=P
+RND(3)-2:P=P-INT(P/(28-D)):D=D+
RND(3)-2:D=D-INT(D/13):NEXT
```

Jeff Noyle
Georgetown, Ontario

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

in the present Color Computer) and challenged the audience to imagine the resolution this would provide.

Steve Bjork is now the OS-9 database section leader on RAINBOW's CoCo SIG on Delphi. Welcome aboard Steve and thanks for the inspiring words.

"Sequential ASCII text files from Disk BASIC load into IBM PC editors without a hitch, although you have to add line feeds after each carriage return when using some editors."

Amiga, Apple IIe, Atari ST-520, IBM PC, MacIntosh, Robotics and the VME bus were the buzz words at the OS-9 community buffet Sunday morning at RAINBOWfest Chicago. What do all these computers have to do with OS-9? They will all run it soon! That's the word from James W. Moore Jr., the Coordinator of Technical Services at Microware. Bill told about 35 OS-9 aficionados the 68K world has not had an across-the-board operating system and Microware's OSK is the ideal candidate. Why?

"OSK gives you the ability to move software across many different machines," Moore said. "This will be great for software developers."

After mentioning all the new OSK ports, Moore turned the audience's attention to CD-I, noting that the applications we'll use everyday in our homes in 1988 haven't even been dreamed up yet. "The possibilities are staggering," he said.

And, how does this affect the Color Computer OS-9 user? "They'll be way ahead in the game," Moore said. "CoCo OS-9 gives them a gateway to the 68000 software used heavily by industry today. Since the 6809 and 68000 bear such a strong family heritage, it is very easy to port most applications from the 6809 to the 68000. Besides, the 6809 is the best and probably the last 8-bit processor. It is still an important product, but more importantly, it is a mature product. It has a lot of life yet."

Moore predicted as all these new OS-9 ports and systems appear, the programmer with CoCo OS-9 experience will have an edge. Their knowledge is directly applicable. "There is a window of opportunity opening up," he said. "Go for it."

Bill Moore and User Group president Brian Lantz both called 1986 the year that OS-9, an underground classic for several years, hits the light of day. "We have seen a lot of interest from the press and the public in the past several months," Moore said. "Some are even naming OS-9 as a potential competitor to MS-DOS in the 68000 world."

With the world waking up to the wonders of OS-9, it's a shame that only 35 people were able to join Users Group members for the OS-9 Community Buffet. I hope to see you at the OS-9 Buffet during RAINBOWfest Princeton.

Getting the Words on Disk

Many people on the CoCo SIG and at RAINBOWfest Chicago have asked us to recommend a good word processor for use on OS-9. It's a personal choice and it depends on the hardware you are using. However, since problems seem to be popping up with many of the established word processors when they are used with some 80-column cards and Tandy's OS-9 Version 2.00.00, we'll offer a few thoughts.

If you are still using a standard issue CoCo without a hardware 80-column card, here's something you might want to think about. Why not use the *DeskMate* editor? Then, feed your file into the Shareware

MicroWorld

230 Moorestown Rd. Wind Gap, PA 18091
(215) 759-7662
Call or write for Price List

LOW PRICES ON 100%
Radio Shack Equipment
(with full warranty)

New Slimline Drive 0	$235.00
Slimline Drive 0 & 1 installed	$399.00

Prices subject to change!
Prices include shipping!

64K Extended	$145.00
Sakata 13" Monitor	$180.00
With monitor driver	$210.00
Multipack Interface	$ 75.00
DMP-105	$159.00
DMP-130	$275.00
Diskettes, any quantity, lifetime Warranty	$ 1.50
Tandy 1000	$695.00

Quantities are limited!
10% off Computerware
10% off all Radio Shack Sale Items
15% off Radio Shack Hardware
20% off all Radio Shack Software

At Last — **INTERCOMP SOUND** presents
PROFESSIONAL MIDI PRODUCTS FOR THE COLOR COMPUTER!!

At InterComp our objective is to support Midi hardware/software for the Color Computer to the fullest. Within the next year or so you can expect a variety of products such as librarian/patch programs (Korg, Yamaha, Casio etc. . .), graphics editor and system exclusive software. Don't go out and buy another computer for your MIDI system!!!!! Our products are designed with the professional in mind, be it for studio, performance, home recording or music education. Here is the start of more to come!

COLOR MIDI CONNECTION — This interface plugs into the cartridge slot. It contains 3 Midi outputs, 1 Midi input, and a female connector for the disk controller (no Y-cable is required) $98.00

SYNTRAX 1.00 — With this sequencer you will quickly control your Midi system! Major features include: 16 polyphonic tracks, interactive editor, 30,000 bytes for note storage, independent repeats for any track, all midi channel control data (program changes, channel #, velocity, pitch wheel, etc.), int/ext sync for Midi drum machines (or another sequencer), programmable tempo, transposition, clefs, key signatures, chords, complex rhythms, use up to 4 disk drives, sequence chaining and linking, notes/Midi-events can be specified with a resolution of 1/384 note! Requires 64K, disk drive, COLOR MIDI CONNECTION — $75.00

SYNTRAX 2.00 — All the features of SYNTRAX 1.00 plus: real/step time record (notes, velocity, program changes and controllers), input filtering, programmable split points, punch in/out anywhere, easy and quick editing of Midi data, supports J&R's **512K** upgrade for a tremendous amount of storage for recording! $125.00 (Customers that already have SYNTRAX 1.00 can upgrade to ver. 2.00 for $60)

SYNLIB 1.0 — Expandable Multi-Instrument Voicing Librarian. Buy what you need, when you need it. Includes pull down menus, SYNTRAX 2.0 compatibility and ease of expandability to set up the studio instantly. Synlib with one Librarian Module — $45. Roland TR707/727 Lib. Module — $20.00. Korg EX800 Lib. Module — $20. Yamaha, Casio Lib. Modules Avail. soon!

Include $3 for shipping (CODs add $2). Residents of N.Y. state add sales tax. Mail check or money order to:

INTERCOMP SOUND
129 LOYALIST AVE
ROCHESTER, NY 14624
Phone: 716-247-8056

because it lets you perform physical input/output operations directly to a disk. Normally, you would be reading or writing to a directory or a file. When you append the commercial "at" sign (@) to a device, you are telling OS-9 that you want to treat the entire disk mounted in the drive as one logical file. And, since Logical Sector Number 0 is the first logical sector on any disk, *patch* looks at it as soon as it is called. Now let's look at the two script files.

Script File Number 1

```
m 0001
05
A0
/
q
```

Script File Number 2

```
m 0001
08
00
40
01
00
/
i 01B4 01FF 00
q
```

The first script file simply positions *patch*'s edit pointer to the second byte in the file. The 05 then replaces the 08 and the A0 replaces the 00. The slash (/) tells *patch* you want to exit the edit mode. The 'q' lets you exit from *patch*.

The second script file is used after the RAM disk contains the information from your floppy disk. First, it changes the second and third bytes back to 08 00, or 2,048 sectors. Then, it changes the number of sectors per track, 12 Hex, in the floppy, back to 40 Hex or 64 in the RAM disk and restores the number of bytes in the RAM disk allocation map to 0100.

The two additional changes are needed because when you backup the floppy to the RAM disk, Logical Sector Number 0 from the floppy disk is copied into Logical Sector Number 0 of the RAM disk. If you didn't change it back, OS-9 would think the RAM disk was a 1,440 sector floppy disk.

The next to last line in the second script file restores the last part of the RAM disk's bit map to its original state. In *patch*, the 'i' means initialize. We are initializing, or clearing, each byte between 01B4 and 01FF to 00. Here's why.

The bit sector allocation map begins at 0100 on both the floppy disk and the RAM disk. The bit map from the 1,440 sector floppy disks ends at 01B3. We need to tell OS-9 that all the sectors beginning with sector number 01B4 are free and may be used by other files. We do this by clearing them. The same procedures work with any size floppy disk and any size RAM disk if you change the two script files to match the two disks you are working with.

OS-9 at RAINBOWfest Chicago

Congratulations to Steve Bjork of SRB Software in Simi Valley, California. Steve, who just last February received the "most improved attitude award" from the OS-9 Users Group when he finally started writing programs for OS-9, delivered the keynote address at the CoCo Community Breakfast, and much of his speech was about OS-9. He gave a sneak preview of the new "Model 13" from Tandy complete with slides of the two "Mickey Mouse" processors it reportedly contains. It looked like he shot them on location at Disneyland where he once worked.

Following his short audio-visual presentation, Bjork highlighted the progress the Color Computer has made, spotlighting the new 80-column cards, the Tandy Sound/Speech Cartridge and the Deluxe RS-232 Pak. Asked why he uses the RS-232 cartridge instead of the pseudo serial port on the back of the CoCo, Bjork replied that he doesn't do "bit banging."

He talked about selling computers to people who have never used one. "Some can't even use a hammer!" he said. "We need to make it easier for them to run a computer. I'm no different. When I want to write a letter, I want to write a letter, not write a program to write a letter."

After mentioning the new hardware, Bjork revealed the secret of why Tandy has moved all its software production over to OS-9. "When you add all these devices, you need an operating system. Without OS-9, all you have is Microsoft BASIC. Besides, Microsoft doesn't know how to write an operating system. Just look at MS-DOS," he said, generating a round of laughter from the crowd.

"After much research, Tandy picked up a then relatively obscure operating system named OS-9," Bjork said. "Today they only support three operating systems: MS-DOS, OS-9 and Xenix. They needed an operating system to carry their software in case they changed their machine."

Bjork also praised the OS-9 programming languages, noting that they are almost completely bug free. Few operating systems manufacturers can say that today. Non-experienced users will find it much easier to use the CoCo in the future. He said the OS-9 based *DeskMate* was a step in the right direction, giving beginners a lot of easy-to-use functions at a reasonable price.

He sparked the imagination of the audience when he talked about the new CD-I standard recently introduced by Sony and Phillips. CD-I, which features interactive audio, video and computer data, is driven by a special version of OS-9. To get people thinking, he talked about a "bird book," telling the audience they would be able to give their CD-I based portable computers the location, time of year and a description of the mystery bird they were looking at. The computer could then return the name of the bird. He thought it might be possible to feed the sound of the bird into the computer and match it with the pre-recorded sound of the bird stored on the compact disk.

Bjork called CD-I an appliance computer and said it would give birth to entertainment disks beyond our wildest imagination. As a technical aside, he mentioned that the VDG chip in the CD-I players uses 100K of memory for each picture (compared to 6K

OS-9™ SOFTWARE/HARDWARE

SDISK—Standard disk driver module allows the full use of 35, 40 or 80 track double sided disk drives with COCO OS-9 plus you can read/write/format the OS-9 formats used by other OS-9 systems. (Note: you can read 35 or 40 track disks on an 80 track drive). Now updated for OS-9 ver. 02.00.00 **$29.95**

SDISK + BOOTFIX—As above plus boot directly from a double sided diskette **$35.95**

L1 UTILITY PAK—Contains all programs from Filter Kits Nos. 1 & 2 plus Hacker's Kit #, plus several additional programs, Over 35 utilities including "wild card" file cmds, MacGen command language, disassembler, disk sector edit and others. Very useful, many of these you will find yourself using every time you run your system. These sold separately for over $85. **$49.95**

SKIO—Hi res screen driver for 24 x 51 display; does key click, boldface, italics, supports upgraded keyboards and mouse. With graphics screen dump and other useful programs. **Now UPDATED FOR OS-9 Ver 2.0 $29.95**

PC-XFER UTILITIES— Utilities to read/write and format ss MS-DOS™ diskettes on CoCo under OS-9. **$45.00 (requires SDISK)**

CCRD 512K Byte RAM DISK CARTRIDGE—Requires RS Multipak interface, two units may be used together for 1MB RAM disk. OS-9 driver and test software included. **$199.00**

All disk prices are for CoCo OS-9 format; for other formats, specify and add $2.00 each. Order prepaid or COD, VISA/MC accepted, add $1.50 S&H for software, $5.00 for CCRD; actual charges added for COD.

D.P. Johnson, 7655 S.W. Cedarcrest St.
Portland, OR 97223 (503) 244-8152

(For best service call between 9-11 AM Pacific Time)

OS-9 is a trademark of Microware and Motorola Inc.
MS-DOS is a trademark of Microsoft, Inc.

experiments, you gain a practical tool and a knowledge of another facet of OS-9 at the same time.

This month, the desire to experiment was driven by the fact that I do not own 80-track double-sided drives but do own one of Tony DiStefano's brand new 512K Super RAM cards from CRC Inc. If I used the tricks I published in June with the 512K RAM Disk and double-sided 40-track drives, I would lose nearly 200K of fast RAM disk, not a viable alternative. I wanted to put every byte of the 512K RAM Disk to work.

Finally, one afternoon while plodding along the Mt. Vernon bicycle trail, I had a brainstorm. "Why not format the RAM disk to its full 512K capacity and then go in and change Logical Sector Number 0 to make the backup command think the RAM disk was the same size as the floppy disk. I could then do the backup quickly. After the backup command had finished its job, I could change Logical Sector Number 0 back to its original state and make OS-9 believe the RAM disk was full size. In real life, it wasn't quite that simple, but it worked.

We'll look first at Logical Sector Number 0. At the highest level, OS-9 communicates with many different types of hardware through a hierarchy of file managers, device drivers and device descriptors. An OS-9 module named IOMan, short for Input/Output Manager, manages the flow of information. To do this job, it relies on several subroutine packages designed to communicate with different types or classes of hardware

The most used of these subroutine packages are SCF, short for Sequential Character Files, and RBF, for Random Block Files. SCF contains a set of routines designed to work with any hardware that sends or receives data sequentially. For example, a terminal sends one character at a time from its keyboard. Likewise, the printer receives one character at a time. SCF manages the flow of these characters to the modem, printer, terminal or any other serial device you have attached to the Color Computer.

However, floppy disks, hard disks and RAM disks behave differently — they send, receive and store information one block at a time. If you were to describe them academically, you would probably call them random-access or block-oriented mass storage devices.

The RBF module is intelligent enough to maintain the logical structure of every file stored on all random access devices. It sends and receives 256 bytes at a time to your hardware by using the proper device driver. However, RBF never needs to deal with the physical details of the read or write operation. The device driver keeps track of things like the physical track and sector address of all data on each disk. RBF only needs to worry about the logical sector number.

The first logical sector on a disk is Logical Sector Number 0. The number of the last logical sector is one less than the total number of sectors available on the disk. The device driver, CCDisk in Color Computer OS-9, translates each logical sector number passed by RBF to the physical track and sector address.

RBF is generic and knows how to communicate with many different storage devices. But before it communicates, RBF must know what type of device it is talking to. To find out, it reads the information stored in Logical Sector Number 0 of the disk mounted in the device. During this read, the driver picks up a lot of information about the physical layout of the disk. Two of the most important details are the number of tracks on the disk and the number of sectors in each track.

This first logical sector is also known as the identification sector. The next logical sector contains the first part of a bit map, or allocation map, that may fill as many as 256 sectors on a large hard disk drive. This bit map tells OS-9 which sectors have already been used to store data and which may be used by additional files. The bit map in the 512K RAM disk we are going to modify just fills Logical Sector Number 1.

Following the bit map, you will find the root directory of the disk. When we modify Logical Sector Number 0 of our RAM disk to make it look like a floppy disk, we are changing the first four bytes in the sector. Later, after we have backed up the floppy disk to the RAM disk, we need to change the first six bytes back to their original state and rewrite part of the bit map. But first let's look at the information stored in Logical Sector Number 0.

During our experiment, we are going to change the value of the total number of sectors on the RAM disk to equal the total number of sectors on our floppy disk. If we look at Logical Sector Number 0 immediately after we format the RAM disk, we find the first three bytes are 00 08 00 Hex or 2,048 decimal sectors. That makes sense since 2,048 * 256 equals 524,288 or 512K. On the other hand, our double-sided, 40-track floppy disk contains 1,440 decimal sectors. If you translate 1,440 to Hex you get 05 A0. So to pull our first trick we must change the 00 08 00 to 00 05 A0. Since the first byte of each value is zero, we need only change the second and third bytes of each three-byte value.

While we are examining Logical Sector Number 0 of our RAM disk, we need to note two other values. We need to know the number of sectors per track and the number of bytes in the allocation map. When we look at the chart, we see that this information is stored at an offset of three and four bytes, respectively, from the beginning of the sector. During our examination, we'll notice that our 512K RAM Disk was formatted with 40 Hex or 64 sectors per track. We'll also see that our RAM disk has 01 00 Hex or 256 bytes in its allocation map. Jot this information down; we'll need it later.

We used the *patch* utility from Computerware's OS-9 Disk Fix and Utilities package to make the changes. Further, we put our input to *patch* in two script files and wrote a short procedure file to do the entire job for us. First, here is the procedure file.

```
load echo
echo Formatting Ram Disk Now
format /rØ >/nil
yDisto Ram Disk
echo Patching Ram Disk Now
patch /RØ@ <scriptl >/nil
echo Backing Up Disk Now
backup #9Ø /DØ /RØ >>/nil
yy
echo Restoring Ram Disk Size Now
patch /RØ@ <script2 >/Nil
echo Enjoy Your New Super Ram
echo from Tony Distefano and CRC
unlink echo
```

Information Stored	Offset	Name in OS9Defs File
Number of sectors on disk	00	DD.TOT
Number of sectors on each track	03	DD.TKS
Number of bytes in allocation map	04	DD.MAP
Number of sectors in each cluster	06	DD.BIT
Root directory	08	DD.DIR
Owner's User Number	0B	DD.OWN
Attributes of Disk	0D	DD.ATT
Internal disk ID number	0E	DD.DSK
Number of sides and density	10	DD FMT
Number of sectors per track	11	DD.SPT
Reserved space	14	DD.RES
First sector in boot file	15	DD.BT
Size of boot file	18	DD.BSZ
Time/date disk created	1A	DD.DAT
Name of Volume	1F	DD.NAM
Path Descriptor Stuff	3F	DD.OPT

There are a couple of things you should notice in the procedure file above. First, we are patching something called "/R0@." And second, the device descriptor nil. The latter allows you to throw away the output of a program. It comes with Version 2.00.00 of OS-9 from Tandy.

The pathlist above, /R0@, is special

KISSable OS-9

Experimenting with RAM Disks

By Dale L. Puckett
Rainbow Contributing Editor

Progress has been plodding along at a snail's pace here at KISSable OS-9 headquarters. Our original $499, 4K, 1979 "Model D" CoCo finally bit the dust and we were forced to lay out $69 to replace it with a 16K CoCo 2. The 16K status didn't last long, however; about an hour after we picked it up, MOTD Editor Bruce Warner and I had installed 64K memory chips. I needed to get online fast because I was falling behind in the testing of all the new equipment/software now available to CoCo OS-9 aficionados.

One of the most exciting opportunities came from Fran McGee at Tandy who loaned us a 15-megabyte hard disk to use for a month or two. Next month, we hope to present an action-packed chronology of our adventures. This month, we follow up on the RAM disk experiments we presented in the June issue. We'll show you another trick that lets you do backups from a floppy and still use all the available space on the RAM disk.

Dale L. Puckett, who is author of The Official BASIC09 Tour Guide *and co-author, with Peter Dibble, of* The Official Rainbow Guide to OS-9, *is a free-lance writer and programmer. He serves as director-at-large of the OS-9 Users Group and is a member of the Computer Press Association. Dale works as a U.S. Coast Guard chief warrant officer and lives in Alexandria, Virginia.*

We'll be telling you about some of the information stored in Logical Sector Number 0 on all OS-9 disks. We'll also look at a CoCo/IBM data transfer utility package and feature a UNIX-like stat routine written in assembler for OS-9, a BASIC09 pretty printing program and a C program that adds a header to the standard *line.c* utility.

First however, we must pass along an addendum and a correction. Tom Roginski of Owl-Ware, P.O. Box 116-D, Mertztown, PA 19539, 800-245-6228, contacted us about the *Winchester* BASIC we described in the June issue. Al Reinhart, the program's author, sent us the information earlier this year. He called the program WBASIC. The proper name for the program is *Winchester* BASIC and you can buy it from Owl-Ware. The price is $50 when you buy an Owl-Ware hard disk drive — $75 when you buy it alone. We try to include the name and address of the vendor when we describe a program, but this one slipped through the cracks.

Turning to corrections, in May we gave you a really slick shortcut to use when you need to OS9Gen a new disk. Unfortunately, my fingers weren't listening to my mind and I typed the wrong command line. The command line should have read, `ls ! os9gen /d1` <ENTER>. To use this tip, create a new directory. Then, copy or save the modules you want in the new OS-9 boot file into this new directory. Finally, use the CHD utility command to make the new directory, the current data directory and type the command line above. Of course, you must have a freshly formatted disk loaded in Drive /D1 when you execute this command.

After developing and testing the procedures needed for this month's RAM disk experiments, I was surprised to receive a message from Dennis Skala on RAINBOW's Delphi CoCo SIG. He had taken a similar approach with his RAM disk.

"I read your June column with interest, especially the handstands you were doing while trying to get a floppy disk quickly copied to a RAM disk without losing a large chunk of the RAM disk's capacity. I went through a similar process when I first started using my RAM disk," Dennis said.

"I didn't think of formatting the floppies in a non-standard way. Rather, I rewrote the backup utility and removed the requirement that the drives have the same number of sectors. This means I can copy any type of disk to the RAM disk — single- or double-sided, 40- or 80-track. I wrote the new backup command so that the balance of the RAM disk in excess of the floppy's capacity remains free," Skala said. "I also picked up a bonus — I can now quickly backup a standard Radio Shack 35-track disk to one of my 40-track drives." You'll be happy to know that Skala has uploaded his new backup command to the OS-9 database section of RAINBOW's CoCo SIG on Delphi and it is available there for you to download

One of the main reasons we publish these little experiments is to provide a practical project to share some of the details that make a complex operating system like OS-9 powerful. When you duplicate one of these

SHACK UP WITH A LIBRARIAN

And even then you couldn't access as many CoCo goodies as you get in Public Domain Software Copying Company's special pre-selected package deals. Check it out.

1 TOOLS—4 disks, 62 files. Includes: Basic 64, BSearch, DiskTest, DOS64, DSBoot, Print DIR, Recover, Romback, Romcat, Scm51, Backup, Unlock, MultBack, Spell & Fix Free Ware, Manual, Dict, Build, List, Append, Addword, Teleterm, Kermit, Superforth 16K Forth, Editor 32K Forth, Manual **$25**

2 GAMES—4 disks, 59 files. GAMES IN BAS C include: Gunner, Life, Poker, Biorythm, Hangman, Go, Fractal, World 3D, Lovetrek, Nude Startrek, Reverse, Scramble, Pizza. FAST MACHINE LANGUAGE: Pong, Squash, Blockade, Germ Grid, 3D-Tictac, Zerog. SIMULATIONS & ADVENTURE: Cave, Wargame, NORAD, arcoyle, KingTUT, Civilwar, cewar **$25**

3 MJS CA MANUAL & UTILITIES—4 disks, 80 files. Includes: Addplay, Boogie, Circus, Clowns, Hyden, JBGood, Sonata3, Straw, #3 Foggy, Funeral, Hardday, Joplin, Peanuts, Rock, Stranger, Camelot, Diamond, Fantasy11, Greengrass, Star Wars, Superman, RootBeer, Chos Bust, Mash, 201, Stelmo, Balstar, Messiah, Raiders, Watermus, Toccata, Fuge etc **$25**

4 GRAPHICON PICTURES—these pictures demonstrate the ability of the Color Computer to produce exciting art. Graphicon needed. Modifyable. 4 disks **$25**

5 PICTURE DISKS—2 disks, 35 files. Turn your CoCo into a Mac. Includes: McPaint Icons, Epson DRV, Animate, Balloon, Hebrew, Typing, RSDMP DRV, Animation Disk includes: Rotate, Shuttle, Triangle, Glass, Star, Baseball, Donduck **$15**

6 FOR THE OS9 OPERATING SYSTEM—2 disks, 20+ files. Includes programs from BASIC09, ASM and C: Finance, Clock, MathDemo, Bounce, GrafDemo, Primes, WC, Six text adventures for OS9 operating system **$15**

7 ALL THE ABOVE—$130 value **$80**

ORDERS: Include full name, complete address, phone with area code (important!). Specify for CoCo. Include $3 P+H per order. Phone, credit cards only. Overseas add 80c per disk. U.S. postage. N.Y. include 8.25% tax, prepaid only. Canada postal money orders, U.S. $ only. We also have PD Software for Ms Dos, CP/M. Catalogs $4. We sell 2 Drive Ms Dos portable 512k $895. We are a copying service providing programs from Users Groups, corrections solicited. Please include $2.40 handling with any returned (postal mangled etc.) disk. Content not warranteed.

The Public Domain Software Copying Company
(est. 1983)
33 Gold Street, New York City 10038
212-732-2565

changes, subscripting and superscripting. For example, you could call for extended letters to type a title or heading and return to normal type for the body of text.

Print formatting commands change format settings in *PenPal* itself like margins, page lengths, line spacing, centering of text, right justification, page numbering options, form feed (new page) and wait after each page is printed. The only thing missing is page headers. These formatting commands permit changes to be made in the middle of the text. For example, you could change the left margin to indent a quotation or a list. When the quotation is entered, a formatting command is included to reestablish the original margin for the following text. If you don't like the default settings for the basic document, lead off with print formatting commands at the beginning of the document. Justification and page numbering choices would certainly be made there.

Write has a few limits. You cannot print out a book manuscript by queuing files as with *Telewriter* and *DynaForm*. It does not do mail merge. It lacks headers, footers and footnoting capability. But, most users will never miss these.

A final consideration is the way *PenPal* saves the text buffer. Like *DeskMate* and a bunch of non-CoCo programs, paragraphs are written into the buffer without delineation of lines within the paragraph. A carriage return character ends the paragraph.

The file on disk is in ASCII format, but apparently lacks the end-of-file designation BASIC expects. To read a file into a BASIC program, two things must be done. First, carriage returns must be inserted into long paragraphs to break them into segments short enough to fit into a BASIC string variable. This must be done by editing the file in *PenPal* and inserting carriage returns at the end of every second or third line on the screen. *PenPal* shows you where there are carriage returns in the document. Next, the file must be run through a BASIC program to save the text to a new disk file that handles the end-of-file properly. The following is an example of a program to do this.

The program simply opens an input and an output file as defined by the user. The directory for each drive used is displayed as a convenience. Strings are read in with `LINEINPUT#1,A$` and printed both to the screen, so one sees some action, and to the second file. One would expect EOF(1) in Line 20 to detect the end of file and close both files. Since a proper end of file is lacking, the program ends with an IE Error which causes BASIC to close the files anyway. The output file will be a proper ASCII file that will load into a BASIC program or into *Telewriter*.

```
4 CLEAR10000
5 CLS:PRINT:INPUT"DRIVE # INPUT
FILE";ID$:PRINT:ID=VAL(ID$):DIRI
D:PRINT:INPUT"INPUT FILE NAME";F
I$:IP$=FI$+":"+ID$
10 OPEN"I",#1,IP$
12 PRINT:INPUT"DRIVE # OUTPUT
FILE ";OD$:PRINT:OD=VAL(OD$):DIR
OD:PRINT:INPUT"OUTPUT FILE
NAME";FO$:OP$=FO$+":"+OD$
15 OPEN"O",#2,OP$
20 IFEOF(1)THEN CLOSE:END ELSE L
INEINPUT#1,A$
30 PRINTA$:PRINT#2,A$
40 GOTO20
```

Though I am typing this in *PenPal*'s Write, I will transport it to *Telewriter* for printing because I want headers on each page.

From this examination of the Write module, you can get the flavor of the rest of *PenPal*. The Calc, Database and Telecom modules each combine much more than minimum functionality coupled with some unique features. Each are easy to learn and use. Some operations like the screen update in the Write module and the recalculation in Calc are unusually fast while none seem especially slow. All are function key driven with a function key strip displayed or, in Graphit, displayable.

My overall impression was good at RAINBOWfest, and a full day with the package has reinforced that. The only problem that might be significant is in the file saving operation on a JDOS-formatted, 40-track disk. It seems to be wasting disk granules. Fewer granules are reported to be available than should be for the number reported used. For example, if I add up the granules used by the files on a 40-track disk, I find 19 of 78 granules used, but only 45 free. Fourteen granules have been lost somewhere. This problem appears to be associated with a 40-track disk formatted with JDOS since disk space all adds up on a 35-track disk formatted by Disk BASIC.

Next month I will discuss the other modules.

PenPal is available from Four Star Software, Box 730, Streetsville P. O., Mississauga, Ontario, Canada, L5M 2C2. Price is $89.95 U.S. Canadian price is $119.95. The program is also available from some U.S. dealers so check RAINBOW advertisements.

name); F3, Free; F4, Kill; and F5, Dir, are identical to Disk BASIC functions. The real fun begins with F6, Step, which changes the stepping rate of the disk drives and F8, Trks, which allows selection of 35- or 40-track drives. You need another DOS like ADOS, CDOS or JDOS to format disks to 40-tracks.

I ran into problems when I tried to set up a 40-track disk. I used JDOS to format a disk with 40 tracks and backup the *PenPal* program disk to it. I ended up with a 35-track disk probably because the file allocation table copied is for 35 tracks. Next I formatted another disk for 40 tracks and used JDOS to copy a number of files across. Part of each file was lost. Next I formatted a 40-track disk and placed it in Drive 1. I booted *PenPal* and checked available sectors on Drive 1. Free reported 73 granules rather than 78. I was able to load files into *PenPal* from the 35-track data disk and save them onto the "40-track" disk, but never recovered the five lost granules. More on JDOS 40-track format problems later.

Finally, from the Main Menu, F7 saves all current settings to a Config file. This way, when you boot *PenPal*, Drive 1 can automatically be the default drive. All current printer defaults are set as well.

As I mentioned before, the files pertaining to a particular application are listed under its name on the main menu. The extensions clue *PenPal* on what belongs where. For example, all files saved from Write and saved as ASCII files from other applications carry a WP extension. Move the cursor over a blank entry under the application to start a new file or over an existing file name to start editing. If a new file is chosen, you are asked for a filename.

Write is the word processor. One of the first things I noticed was the 32,510 byte text buffer. This holds a lot of text. Any article in this RAINBOW would fit. This compares with about a 12K buffer in *DeskMate*.

PenPal is much like *DeskMate* in cursor movement and editing methods. It supports block commands to delete, copy and move text. It also supports buried printer control commands with the ability to tailor these commands to your printer and save these codes to the Config file using F7 from the main menu. Nine commands are available, each with a toggle on and a toggle off form. While six come predefined for RS-DMP printers, you can change these for your printer. These are needed to provide for underlining, font

Metric Industries

Model 101 Interface $39.95



The Model 101 is a serial to parallel interface intended for use with a COCO and any Centronics compatible parallel input printer. The 101 has 6 switch selectable baud rates (300-9600). The 101 is only 4" × 2" × 1" and comes with all cables and connectors for your computer and printer.

The Model 104 Deluxe Interface $51.95

The Model 104 is a serial to parallel interface like the Model 101 but it has the added feature of a serial port (sometimes referred to as a modem switch). This feature allows the connection of a parallel printer and any serial device (modem, serial printer etc.) to your computer. You may then select either output serial or parallel, with the flip of a switch. The 104 is only 4.5" × 2.5" × 1.25" and comes with all cables and connectors for your computer. You supply the serial cable for your modem or other serial device.

Model 103 Combo $68.95

With the turn of a knob the model 103 switches your computer's RS232C serial port to any one of 3 outputs — 2 serial and 1 parallel. The serial ports may be used for modems, serial printers or even another computer. The parallel port can be used with any Centronics compatible printer. The 103 has the best features from the 101 and 102: color coded position indicator lights, 6 switch selectable baud rates, heavy anodized aluminum cabinet, and many more.

Model 102 Switcher $35.95

The Model 102 has 3 switch positions that allow you to switch your computer's serial output between 3 different devices (modem, printers or another computer). The 102 has color coded lights that indicate the switch position. These lights also act as power indicators to let you know your computer is on. Supplied with the 102 are color coded labels that can be applied to your accessories. The 102 has a heavy guage anodized aluminum cabinet with non-slip rubber feet.

Cassette Label Program $6.95

New Version 1.2-Tape transferrable to disk. Now save and load Labels from tape or disk.

This fancy printing utility prints 5 lines of information on pinfeed cassette labels. "Cassette Label" is menu driven and is very easy to use. It uses the special features of your printer for standard, expanded or condensed characters. Each line of text is automatically centered. Before the label is printed, it is shown on your CRT — enabling you to make changes if you like — then print 1, 2 or 100 labels. The program comes on tape and it is supplied with 24 labels to get you started. 16K ECB required.



Other Quality Items

High Quality 5 Screw Shell C-10 Cassette Tapes **$7.50 per dozen**

Hard Plastic Storage Boxes for Cassette Tapes **$2.50 per dozen**

Pin Feed Cassette Labels
White **$3.00 per 100**
Colors **$3.60 per 100** (Red, Blue, Yellow or Tan)

VISA MasterCard

THE 101, 103 AND 104 ALL REQUIRE POWER IN ORDER TO OPERATE. MOST PRINTERS CAN SUPPLY POWER TO YOUR INTERFACE. STAR, RADIO SHACK AND OKIDATA ARE JUST A FEW THAT DO. EPSON DOES NOT. THE INTERFACES CAN ALSO BE POWERED BY AN AC ADAPTER (RADIO SHACK MODEL 273-1431 PLUGS INTO ALL MODELS). IF YOU REQUIRE A POWER SUPPLY, ADD A "P" TO THE MODEL NUMBER AND $5.00 TO THE PRICE. (MODEL 101P $44.95, MODEL 104P $56.95 AND MODEL 103P $73.95)

The Model 101, 102, 103 and 104 will work with any COCO, any level basic and any memory size. These products are covered by a **1 year warranty.**

The Model 101, 103 and 104 work with any standard parallel input printer including Gemini, Epson, Radio Shack, Okidata, C. Itoh and many others. They support BASIC print commands, word processors and graphic commands.

We manufacture these products. Dealer inquiries are invited.

To order call our 24 hour order line 513-677-0796 and use your VISA, MASTERCARD request C.O.D. or send check or money order to:

Metric Industries
P.O. Box 42396
Cincinnati, OH 45242

Free shipping on orders over $50.00. Ohio residents add 5.5% sales tax.
Orders under $50.00 please add $2.50 for shipping.

ACCESSIBLE APPLICATIONS

Getting in Touch with *Pen Pal*

By Richard A. White
Rainbow Contributing Editor

Many people I spoke with at the Chicago RAINBOWfest are very satisfied with *DeskMate*, considering it is a beginner's level program. But, the folks at Four Star Software aren't satisfied since they are selling *PenPal* to do the same things. James Norrie of Four Star gave me a demonstration and ended up selling a copy to me. The last thing I need is another program to do word processing, spreadsheets, databases, graphing and telecommunications. However, *PenPal* looked so good, I felt I had to give it a real workout and let you know what I found. *PenPal* requires a 64K CoCo with one disk drive. Two drives are better.

There needs to be two sets of standards when judging software of this type. One is the power and usefulness of the individual modules and the other is the value of the total package to the average user who doesn't want or need most of the bells and whistles in the more powerful, single-application packages. Let's look at each application in *PenPal*, then make a judgment on the whole and look at the pieces more critically.

All applications use a common 51-character by 24-line screen in the high resolution graphics mode. Screen update is the fastest I have seen on the CoCo. One problem I have with *Telewriter* is that characters are lost when the wordwrap scrolls the screen and starts a new line. This has not happened on *PenPal*. The whole screen seems to move up one line as a unit and the word being wordwrapped goes to the left margin.

The top line of the screen displays a command line in reverse video. This is where things like the module name and current filename are displayed. The bottom two lines display a function key strip, again in reverse video. Up to 10 functions are displayed which are called by pressing the CLEAR key and a number together. Some applications have more than 10 functions in which case the F0 (CLEAR-'0') toggles the display of the alternate function key strip. Only those functions currently displayed by the function key strip can be called, but the alternate strip is easily toggled into view.

The five alternate functions are called by pressing SHIFT, CLEAR and the number key together. AF1 invokes a simple calculator that uses the command line at the top of the screen and does not interfere with the display for the application you are in. AF2 allows the user to change the printer defaults such as margins, page lengths, Baud rate and the like. The defaults are displayed one at a time in the command line at the top of the screen and pressing ENTER leaves the setting unchanged and moves to the next. This is much faster than loading graphics configuration screens and saving them as *DeskMate* does. You have the option of saving the new defaults from the main menu. In addition, the defaults are maintained as you move from application to application during a session.

AF3 toggles the screen background color between green and buff. AF4 calls the help file appropriate for the application and AF5 produces a directory of the default drive. AF12 exits an application without saving the file. What is key 12? It's the minus sign. CLEAR and the minus key (F12) will exit any function, application, or the program from the main menu.

When you LOADM *PenPal* and type EXEC, you see the main menu. It presents a five-part table headed by the application name with the names of the files listed below. The function key strip displays disk file functions. F1, Swap, changes the default drive. F2, Name(Re-

Richard White lives in Fairfield, Ohio, and has a long background with microcomputers and specializes in BASIC programming. With Don Dollberg, he is the co-author of the TIMS *database management program.*

Listing 3: CHARGEN

```
300 .....234
500 .....181
END .....1
```

```
1ØØ 'CHARACTER GENERATOR TEST PR
OGRAM
11Ø CLEAR 1ØØ,&H3FFF
12Ø POKE &H413C,&H42
13Ø POKE &H413D,&HØØ
14Ø FOR I=&H42ØØ+65*8 TO &H42ØØ+
65*8+26*8-1
15Ø READ A: POKE I,A
16Ø NEXT I
17Ø FOR I=&H42ØØ+32*8 TO &H42ØØ+
32*8+7
18Ø POKE I,Ø
19Ø NEXT I
2ØØ LOADM"CHARGEN",&H4ØØØ
21Ø DEFUSRØ=&H4ØØØ
22Ø PMODE 4,1
23Ø SCREEN 1,Ø
24Ø PCLS
25Ø A$=CHR$(Ø)+CHR$(Ø)+CHR$(1)+"
TANDY"
26Ø B=VARPTR(A$)
27Ø A=USRØ(B)
28Ø C$=CHR$(5Ø)+CHR$(5Ø)+CHR$(2)
+"COLOR COMPUTER"
29Ø B=VARPTR(C$)
3ØØ A=USRØ(B)
31Ø D$=CHR$(4Ø)+CHR$(1ØØ)+CHR$(6
)+"SUPER"
32Ø B=VARPTR(D$)
33Ø A=USRØ(B)
34Ø GOTO 34Ø
35Ø DATA 16,4Ø,68,68,124,68,68,Ø
36Ø DATA 12Ø,36,36,56,36,36,12Ø,
Ø
37Ø DATA 56,68,64,64,64,68,56,Ø
38Ø DATA 12Ø,36,36,36,36,36,12Ø,
Ø
39Ø DATA 124,64,64,12Ø,64,64,124
,Ø
4ØØ DATA 124,64,64,1Ø2,64,64,64,
Ø
41Ø DATA 6Ø,64,64,76,68,68,6Ø,Ø
42Ø DATA 68,68,68,124,68,68,68,Ø
43Ø DATA 56,16,16,16,16,16,56,Ø
44Ø DATA 4,4,4,4,4,68,56,Ø
45Ø DATA 68,72,8Ø,96,8Ø,72,68,Ø
46Ø DATA 64,64,64,64,64,64,124,Ø
47Ø DATA 68,1Ø8,84,84,68,68,68,Ø
48Ø DATA 68,1ØØ,84,76,68,68,68,Ø
49Ø DATA 56,68,68,68,68,68,56,Ø
5ØØ DATA 12Ø,68,68,12Ø,64,64,64,
Ø
51Ø DATA 56,68,68,68,84,72,52,Ø
52Ø DATA 12Ø,68,68,12Ø,8Ø,72,68,
Ø
53Ø DATA 56,68,64,56,4,68,56,Ø
54Ø DATA 124,16,16,16,16,16,16,Ø
55Ø DATA 68,68,68,68,68,68,56,Ø
56Ø DATA 68,68,68,4Ø,4Ø,16,16,Ø
57Ø DATA 68,68,68,68,84,1Ø8,68,Ø
58Ø DATA 68,68,4Ø,16,4Ø,68,68,Ø
59Ø DATA 68,68,4Ø,16,16,16,16,Ø
6ØØ DATA 16,56,84,16,16,Ø,Ø,Ø
```


CoCo's Best & Fastest Spreadsheet

RS-DOS VERSION

(WITH GRAPHICS)

DYNACALC®

Computer Systems Center
42 Four Seasons Center #122
Chesterfield MO 63017
(314) 576-5020

OS-9 VERSION

Exclusively from Radio Shack
Stock No. 26-3275

Works with 80-Column Hardware

whether that pattern is a character or some other symbol.

Next month we'll be back with more CoCo assembly language topics. In the meantime, use those PCRs and move around a little! □

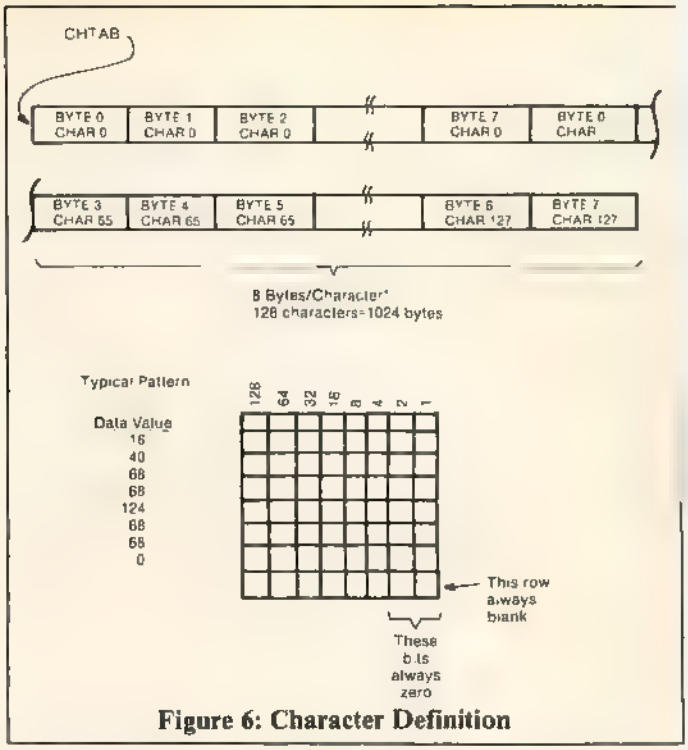

Figure 6: Character Definition

Listing 1:

```
                    ØØ1ØØ *MOVE CHARACTER SUBROUTINE
3EØØ                ØØ11Ø          ORG     $3EØØ
3EØØ                ØØ12Ø CHAR     RMB     1       RESERVE FOR CHARACTER CODE
3EØ1                ØØ13Ø SPEED    RMB     1       RESERVE FOR SPEED
3EØ2 B6  3EØØ       ØØ14Ø START    LDA     CHAR    GET CHARACTER
3EØ5 F6  3EØ1       ØØ15Ø          LDB     SPEED   GET SPEED
```

Listing 2:

```
                    ØØ17Ø *-----------------------------------------------
                    ØØ18Ø * WRITE TEXT ON GRAPHICS SCREEN PROGRAM
                    ØØ19Ø * INPUT  INPUT ARGUMENT POINTS TO STRING PAR BLK
                    ØØ2ØØ *        A$=CHR$(X)+CHR$(Y)+CHR$(SF)+"TEXT..."
                    ØØ21Ø * OUTPUT OUTPUT ARGUMENT CONTAINS NEXT X,Y
                    ØØ22Ø *-----------------------------------------------
ØØØØ BD  B3ED       ØØ23Ø WTEXT    JSR     $B3ED   CONVERT POINTER TO SPB
ØØØ3 1F  Ø1         ØØ24Ø          TFR     D,X     NOW IN X
ØØØ5 A6  84         ØØ25Ø          LDA     ,X      GET LENGTH OF STRING
ØØØ7 8Ø  Ø3         ØØ26Ø          SUBA    #3      ADJUST FOR X,Y,SF
ØØØ9 25  3A         ØØ27Ø          BLO     WTEØ2Ø  GO IF NULL STRING
ØØØB A7  8D Ø11D    ØØ28Ø          STA     CCNT PCR STORE FOR LOOP CONTROL
ØØØF AE  Ø2         ØØ29Ø          LDX     +2,X    GET STRING ADDRESS
ØØ11 EC  84         ØØ3ØØ          LDD     ,X      GET XY
ØØ13 ED  8D Ø11A    ØØ31Ø          STD     XX,PCR  STORE
ØØ17 A6  Ø2         ØØ32Ø          LDA     +2,X    GET SF
ØØ19 A7  8D Ø116    ØØ33Ø          STA     SF,PCR  SAVE SCALE FACTOR
ØØ1D 3Ø  Ø3         ØØ34Ø          LEAX    +3,X    BUMP PAST SF
ØØ1F AF  8D Ø19A    ØØ35Ø          STX     TEXT,PCR STORE AS POINTER
                    ØØ36Ø *MAIN LOOP HERE
ØØ23 A6  9D Ø1Ø6    ØØ37ØØ WTEØ1Ø  LDA     [TEXT,PCR] GET NEXT CHARACTER
ØØ27 C6  Ø8         ØØ38Ø          LDB     #8          8 BYTES PER CHARACTER
ØØ29 3D             ØØ39Ø          MUL                 FIND OFFSET FROM START
ØØ2A E3  8D Ø19E    ØØ4ØØ          ADDD    CHTAB,PCR   NOW POINTS TO CHAR
ØØ2E ED  8D ØØFD    ØØ41Ø          STD     CHAR,PCR    STORE FOR OUTPUT
ØØ32 8D  19         ØØ42Ø          BSR     WRITEC      WRITE THIS CHARACTER
ØØ34 EC  8D ØØF5    ØØ43Ø          LDD     TEXT,PCR    GET TEXT POINTER
ØØ38 C3  ØØØ1       ØØ44Ø          ADDD    #1          BUMP TEXT POINTER
ØØ3B ED  8D ØØEE    ØØ45Ø          STD     TEXT,PCR    STORE FOR NEXT ACCESS
ØØ3F 6A  8D ØØE9    ØØ46Ø          DEC     CCNT,PCR    DECREMENT COUNT
ØØ43 26  DE         ØØ47Ø          BNE     WTEØ1Ø      GO IF MORE CHARS
                    ØØ48Ø *NO MORE CHARACTERS HERE
ØØ45 EC  8D ØØE8    ØØ49Ø WTEØ2Ø   LDD     XX,PCR      GET CURRENT X,Y
ØØ49 BD  B4F4       ØØ5ØØ          JSR     $B4F4       CONVERT BACK FOR OUTPUT
ØØ4C 39             ØØ51Ø          RTS                 RETURN
                    ØØ52Ø *-----------------------------------------------
                    ØØ53Ø *WRITE A CHARACTER SUBROUTINE
ØØ4D A6  8D ØØE1    ØØ54Ø WRITEC   LDA     YY,PCR      GET CURRENT Y
ØØ51 34  Ø2         ØØ55Ø          PSHS    A           SAVE FOR RETURN
ØØ53 86  Ø8         ØØ56Ø          LDA     #8          8 ROWS PER CHARACTER
ØØ55 A7  8D ØØDB    ØØ57Ø          STA     WCNT,PCR SAVE FOR COUNT
                    ØØ58Ø *MAIN LOOP HERE
ØØ59 A6  8D ØØD6    ØØ59Ø WRIØ1Ø   LDA     SF,PCR      GET SCALE FACTOR
ØØ5D A7  8D ØØD4    ØØ6ØØ          STA     WORK1,PCR   SAVE FOR SET ROW SR
                    ØØ61Ø *INNER LOOP HERE
ØØ61 A6  9D ØØCA    ØØ62Ø WRIØ2Ø   LDA     [CHAR,PCR]  GET ROW BIT PATTERN
ØØ65 A7  8D ØØCD    ØØ63Ø          STA     ROW,PCR     SAVE
ØØ69 8D  31         ØØ64Ø          BSR     SETROW      WRITE A ROW
ØØ6B 6C  8D ØØC3    ØØ65Ø          INC     YY,PCR      BUMP Y POINTER
ØØ6F 6A  8D ØØC2    ØØ66Ø          DEC     WORK1,PCR   DECREMENT SF COUNT
ØØ73 26  EC         ØØ67Ø          BNE     WRIØ2Ø      GO IF MORE EXPANSION
ØØ75 EC  8D ØØB6    ØØ68Ø          LDD     CHAR,PCR    GET ROW PATTERN PTR
ØØ79 C3  ØØØ1       ØØ69Ø          ADDD    #1          BUMP ROW PATTERN PTR
ØØ7C ED  8D ØØAF    ØØ7ØØ          STD     CHAR,PCR    SAVE FOR NEXT ROW
ØØ8Ø 6A  8D ØØB9    ØØ71Ø          DEC     WCNT,PCR    DECREMENT ROW COUNT
ØØ84 26  D3         ØØ72Ø          BNE     WRIØ1Ø      GO IF NOT 12
                    ØØ73Ø *WRITTEN 8 ROWS HERE
ØØ86 A6  8D ØØA9    ØØ74Ø          LDA     SF,PCR      GET SCALE FACTOR
ØØ8A C6  Ø6         ØØ75Ø          LDB     #6          6 BITS PER ROW
ØØ8C 1D             ØØ76Ø          MUL                 COMPUTE X EXPANSION
ØØ8D EB  8D ØØA8    ØØ77Ø          ADDB    XX,PCR      ADJUST X
ØØ91 E7  8D ØØ9C    ØØ78Ø          STB     XX,PCR      POINT TO NEXT CHAR POS
ØØ95 35  Ø2         ØØ79Ø          PULS    A           GET ORIGINAL Y
ØØ97 A7  8D ØØ97    ØØ8ØØ          STA     YY,PCR      RESTORE Y
ØØ9B 39             ØØ81Ø          RTS                 RETURN
                    ØØ82Ø *-----------------------------------------------
                    ØØ83Ø *SET A ROW SUBROUTINE
ØØ9C A6  8D ØØ91    ØØ84Ø SETROW   LDA     XX,PCR      GET CURRENT X
ØØA Ø 34  Ø2         ØØ85Ø          PSHS    A           SAVE FOR RETURN
ØØA2 86  Ø6         ØØ86Ø          LDA     #6          6 COLUMNS/ROW
ØØA4 A7  8D ØØ8F    ØØ87Ø          STA     COONT,PCR SAVE FOR LOOP CONTROL
                    ØØ88Ø *MAIN LOOP HERE
ØØA8 A6  8D ØØ87    ØØ89Ø SETØ1Ø   LDA     SF PCR      GET SCALE FACTOR
ØØAC A7  8D ØØ88    ØØ9ØØ          STA     WORK2,PCR   SAVE FOR EXPANSION OF X
                    ØØ91Ø *INNER LOOP HERE
ØØAØ 6F  8D ØØ85    ØØ92Ø SETØ2Ø   CLR     BIT,PCR     SET BIT TO Ø
ØØB4 A6  8D ØØ7E    ØØ93Ø          LDA     ROW,PCR     GET REMAINING PATTERN
ØØB8 2A  Ø4         ØØ94Ø          BPL     SETØ3Ø      GO IF Ø
ØØBA 6C  8D ØØ7B    ØØ95Ø          INC     BIT,PCR     SET BIT TO 1
ØØBE 8D  1B         ØØ96Ø SETØ3Ø   BSR     PSET        SET ONE BIT
ØØCØ 6C  8D ØØ6D    ØØ97Ø          INC     XX PCR      BUMP X POSITION
ØØC4 6A  8D ØØ7Ø    ØØ98Ø          DEC     WORK2,PCR   DECREMENT SCALE FAC
ØØC8 26  E6         ØØ99Ø          BNE     SETØ2Ø      GO IF MORE X BITS
ØØCA 68  8D ØØ68    ØØ1ØØ          LSL     ROW PCR     SHIFT BIT PATTERN LEFT
ØØCE 6A  8D ØØ65    ØØ1Ø1          DEC     COONT,PCR   DECREMENT COLUMN COUNT
ØØD2 26  D4         ØØ1Ø2          BNE     SETØ1Ø      GO IF MORE COLUMNS
                    ØØ1Ø3 *ONE ROW DONE HERE
ØØD4 35  Ø2         ØØ1Ø4          PULS    A           RESTORE X
ØØD6 A7  8D ØØ57    ØØ1Ø5          STA     XX,PCR      FOR NEXT ROW
ØØDA 39             ØØ1Ø6          RTS                 RETURN
                    ØØ1ØØØ *-----------------------------------------------
                    Ø1Ø1Ø *PSET OR PRESET SUBROUTINE
ØØDB E6  8D ØØ53    Ø1Ø2Ø PSET     LDB     YY,PCR      GET CURRENT Y
ØØDF 86  2Ø         Ø1Ø3Ø          LDA     #32         32 BYTES PER ROW
ØØE1 3D             Ø1Ø4Ø          MUL                 FIND BYTE OFFSET
ØØE2 C3  ØE ØØ      Ø1Ø5Ø          ADDD    #$E ØØ      NOW POINTS TO BYTE ROW
ØØE5 ED  8D ØØ51    Ø1Ø6Ø          STD     LOC,PCR SAVE FOR ACCESS OF BYTE
ØØE9 E6  8D ØØ44    Ø1Ø7Ø          LDB     XX,PCR      CURRENT X
ØØED 86  2Ø         Ø1Ø8Ø          LDA     #32         THIS IS DIVIDE BY 8
ØØEF 3D             Ø1Ø9Ø          MUL                 QUOTIENT IN A
ØØFØ 1F  B9         Ø11ØØ          TFR     A,B         Q NOW IN B
ØØF2 4F             Ø111Ø          CLRA                Q NOW IN D
ØØF3 E3  8D ØØ43    Ø112Ø          ADDD    LOC,PCR NOW POINTS TO ACTUAL BYTE
ØØF7 ED  8D ØØ3F    Ø113Ø          STD     LOC,PCR STORE FOR ACCESS
ØØFB 1Ø83 26ØØ      Ø114Ø          CMPD    #$EØØ+6144 TEST FOR OUT OF PAGE
ØØFF 24  2A         Ø115Ø          BHS     PSET99      DO NOTHING IF OUT
Ø1Ø1 1Ø83 ØEØØ      Ø116Ø          CMPD    #$EØØ       TEST FOR OUT OF PAGE
Ø1Ø5 25  24         Ø117Ø          BLO     PSET99      DO NOTHING IF OUT
Ø1Ø7 E6  8D ØØ26    Ø118Ø          LDB     XX,PCR      GET CURRENT X
Ø1ØB C4  Ø7         Ø119Ø          ANDB    #7          GET BIT POSITION
Ø1ØD 86  8Ø         Ø12ØØ          LDA     #128        MS BIT FOR MASK
Ø1ØF 5D             Ø121Ø PSET1Ø   TSTB                TEST BIT COUNT
Ø11Ø 27  Ø4         Ø122Ø          BEQ     PSET15      GO IF FOUND
Ø112 44             Ø123Ø          LSRA                SHIFT MASK
Ø113 5A             Ø124Ø          DECB                DECREMENT COUNT
Ø114 2Ø  F9         Ø125Ø          BRA     PSET1Ø      CONTINUE SHIFTING
Ø116 6D  8D ØØ1F    Ø126Ø PSET15   TST     BIT PCR TEST BIT FOR Ø OR 1
Ø11A 26  Ø7         Ø127Ø          BNE     PSET2Ø      GO IF 1
Ø11C 43             Ø128Ø          COMA                COMPLEMENT MASK
Ø11D A4  9D ØØ19    Ø129Ø          ANDA    [LOC PCR] RESET THE BIT
Ø121 2Ø  Ø4         Ø13ØØ          BRA     PSET25      GO TO STORE
Ø123 AA  9D ØØ13    Ø131Ø PSET2Ø   ORA     [LOC,PCR] SET BIT
Ø127 A7  9D ØØØF    Ø132Ø PSET25   STA     [LOC,PCR] STORE BYTE WITH BIT
Ø12B 39             Ø133Ø PSET99   RTS                 RETURN
                    Ø134Ø *-----------------------------------------------
                    Ø135Ø *WORKING VARIABLES - COULD BE STACK  BUT
Ø12C                Ø136Ø CCNT     RMB     1       # OF CHARACTERS TO DISPLAY
Ø12D                Ø137Ø TEXT     RMB     2       POINTER TO BASIC TEXT
Ø12F                Ø138Ø CHAR     RMB     2       POINTER TO CURRENT CHAR PAT
Ø131      FF        Ø139Ø          FCB     -1      CURRENT X
Ø132      FF        Ø14ØØ YY       FCB     -1      CURRENT Y
Ø133                Ø141Ø SF       RMB     1       SCALE FACTOR
Ø134                Ø142Ø WCNT     RMB     1       # OF ROW COUNTER
Ø135                Ø143Ø WORK1    RMB     1       WORKING
Ø136                Ø144Ø ROW      RMB     1       CURRENT ROW BITS
Ø137                Ø145Ø COONT    RMB     1       CURRENT COL COUNT
Ø138                Ø146Ø WORK2    RMB     1       WORKING
Ø139                Ø147Ø BIT      RMB     1       CURRENT BIT
Ø13A                Ø148Ø LOC      RMB     2       BYTE CONTAINING BIT
                    Ø149Ø *-----------------------------------------------
                    Ø15ØØ *CHARACTER PATTERN TABLE. 8 ROWS/CHARACTER
                    Ø151Ø *FOR 128 CHARACTERS-1Ø24 BYTES
Ø13C                Ø152Ø CHTAB    RMB     2
          ØØØØ      Ø153Ø          END

ØØØØØ TOTAL ERRORS
```

The effective address is therefore $3E0C, the location of ARG1.

The other program counter relative instructions compute the address in the same fashion. Since PCR-type instructions don't contain an absolute address, they can be placed anywhere in memory and execute properly, even if they refer to locations inside the relocated program. The expense of using the PCR instructions is memory (PCR instructions are longer), more complexity and giving up a few other addressing modes (you can't use auto-increment addressing together with PCR, for example).

A Character Generator for Graphics Mode

To tie all of these concepts together, we've written a *Character Generator* program, shown in Listing 2. The program allows you to write any normal text character on the screen in graphics mode in upper- and lowercase. It also allows you to change the size of the characters. The program assumes you are in PMODE 4 (256 by 192, two-color mode), you are using graphics page one and you have a disk system.

The input parameters to the system take the form of a BASIC string. The first character of this string is the 'X' position representing the upper left-hand corner of the first character. The second character of the string is the corresponding 'Y' position. The third character is the size of the characters to be written on the screen, from one to 16. The remainder of the string is the text to be written. As an example, suppose that you wanted to write "This is a test" in the center of the screen. The height of text for a text screen is 12 pixels high and the width is eight pixels. However, character positions for this program are eight pixels high by eight pixels wide to allow packing 24 lines on the screen. The center of the screen is at X=128, Y=96 The input string looks like this:

```
ZZ$=CHR$(128)+CHR$(96)+CHR$(1)+"THIS IS A TEST"
```

The screen output looks like Figure 4.

Figure 4:
Sample Character Generator Output

To change the size of the text, use another value in the third byte. This byte represents the magnification factor. To display characters 24 pixels high you'd have:

```
ZZ$=CHR$(124)+CHR$(90)+CHR$(3)+"This is larger text"
```

The ZZ$ string variable string was used only as an example. Any string variable can be used, as long as it has the 'X' and 'Y' positions and magnification factor in the first three bytes. The sequence for calling the *Character Generator* uses the VARPTR function:

```
1000 ZZ$=...
1010 B=VARPTR(ZZ$)
1020 A=USR(B)
```

Of course, the program must have been relocated to protected memory and a DEFUSR done to define the start — all of the steps we described earlier. The program is relocatable, by the way, so that it can be used anywhere in memory you want to put it. Program counter relative addressing is used throughout the code.

Listing 3 shows a typical use of the *Character Generator* in writing sample text. The program must be on the disk in binary form (the output of an assembler). The program is relocatable and may be moved anywhere in RAM, but allow 318 bytes for the program. Change DEFUSR0 accordingly. The resulting display for this test driver is shown in Figure 5.

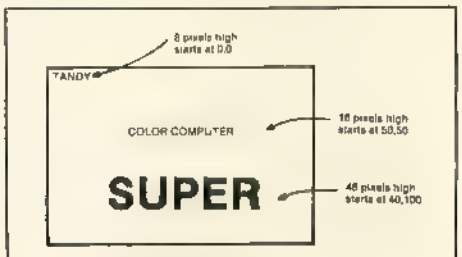

Figure 5: Test Driver Display

The program uses a 1,024-byte character pattern area called CHTAB, or Character Table. The address of this table must be POKEd into locations $13C and $13D as shown in Listing 3. The Character Table can be directly after the *Character Generator* program, or may be anywhere else in memory. The first eight bytes in this table represent the pattern for an ASCII character of zero, the next eight bytes the pattern for an ASCII character of one, the 65th set of eight bytes represent the pattern for 'A', and so forth. You can fill in your own characters for ASCII codes not normally used in the Color Computer, such as codes zero through 31. Each set of eight bytes represents the eight rows that make up a character, as shown in Figure 6.

The BASIC test program shows the patterns for the uppercase alphabetic characters A through Z and for a space character. Fill in the remaining characters as the need arises. All 128 positions in the table can be used, and any symbols meaningful to you can be used. Don't forget that the "scale factor" allows an expansion of each pattern,

The Universal MacInker(s)™ are here

Re-ink any Fabric ribbon automatically for less than

5¢

Now one **Universal Cartridge MacInker (UC)** re-inks all fabric cartridges and one **Universal Spool MacInker (US)** re-inks all spools. We have **MacInker(s)** dedicated to specialized cartridges, zip pack harmonica etc. Over 1000 printer brands supported. Use your **MacInker** to re-ink your dry, fabric cartridges (for less than 5 cents in ink) and watch the improvement in print-out quality. Our new, residue-less, lubricated dot matrix ink yields a darker print than most new ribbons. Or get any of our basic ink colors: brown, blue, red, green, yellow, purple and use **MacInker** to **create and/or Re-ink your own colored cartridges.** We have uninked or colored cartridges for the popular printers and ribbon re-loads for any printer. Operation is extremely simple & automatic with new twin drive electric motor that supports CW and CCW rotating cartridges. A good quality fabric ribbon of average length can be re-inked almost indefinitely. In our tests one re-inked Epson* 80 ribbon has outlived the estimated life of the print-head! We receive consistent & similar feedback from our customers. As of August 86 we have over 40 000 MAC INKER(s) in the field, in 5 continents (220 V motors available). **MacInker (UC) is $60.00.** Cartridge drivers are **$8.50/ea.** We still have our first generation, dedicated **MacInker(s)** for most popular printers. Prices start at **$54.95** with most units below $60.00. **MacInker** has been reviewed, approved and flattered in most magazines and even in the NEW YORK TIMES and the CHICAGO SUN TIMES.

Universal Cartridge MacInker

Computer Friends

6415 S.W. Canyon Ct.
Portland, OR 97221
(503) 297-2321

Order toll free 1-800-547-3303
or ask for free detailed brochure.
Dealers inquiries welcome.

*EPSON is a trademark of EPSON CORP

Assembly language:

```
START   JSR  $B3ED
        TFR  D,X        point to block
        LDA   ,X        get 45
        LDB  1,X        get 233  etc
```

Is this really better than just assigning a block of protected memory for the parameter block? Probably not, but it is an alternative method

VARPTR is handy, though, when working with strings. If VARPTR is used to find the location of a string, it returns not the address of the string, but the address of a five-byte string parameter block as shown in Figure 3. The third and fourth bytes of this parameter block (+2 and +3) point to the location of the string itself. If this string address is used in the assembly language subroutine, it must again be converted to an integer value in D by a JSR $B3ED as shown here:

BASIC:

```
10Ø A$="COLOR COMPUTER"
11Ø B=VARPTR(A$)
12Ø DEFUSRØ=&H3EØØ
13Ø A=USRØ(B)
```

Assembly language:

```
START   JSR   $B3ED        convert to integer address
        TFR   D,X           X now points to string
```

Suppose we had a program that referenced a parameter block at the beginning of the program area, something like this:

```
3EØØ    ØØ      ØØ1ØØ   XPOS    FCB   Ø       for x position
3EØ1    ØØ      ØØ11Ø   YPOS    FCB   Ø       for y position
3EØ2 B6 3EØØ    ØØ12Ø   START   LDA   XPOS    get X position
3EØ5 F6 3EØ1    ØØ13Ø           LDB   YPOS    get Y position
```

You can see that the LDA and LDB assembled as "extended" addressing types of instructions. Each instruction consists of a one-byte operation code ($B6 and $F6) followed by a two-byte address ($3E00 and $3E01). What would happen if this code were incorporated into DATA statements and then moved to the $4000 area? The result would look like this:

```
4ØØØ    ØØ      ØØ1ØØ   XPOS    FCB   Ø       for x position
4ØØ1    ØØ      ØØ11Ø   YPOS    FCB   Ø       for y position
4ØØ2 B6 3EØØ    ØØ12Ø   START   LDA   $3EØØ    get X position
4ØØ5 F6 3EØ1    ØØ13Ø           LDB   $3EØ1    get Y position
```

Although the locations in which the instructions were stored changed, the references were still to $3E00 and $3E01. Obviously, when this program was executed, A was loaded with the contents of location $3E00 and B with the contents of location $3E01 instead of the new locations at the beginning of the program, $4000 and $4001.

This problem occurs for all references to data locations inside the program, but not to external fixed areas. If there were a parameter block at memory area $5000, for example, an LDA $5000 would be valid

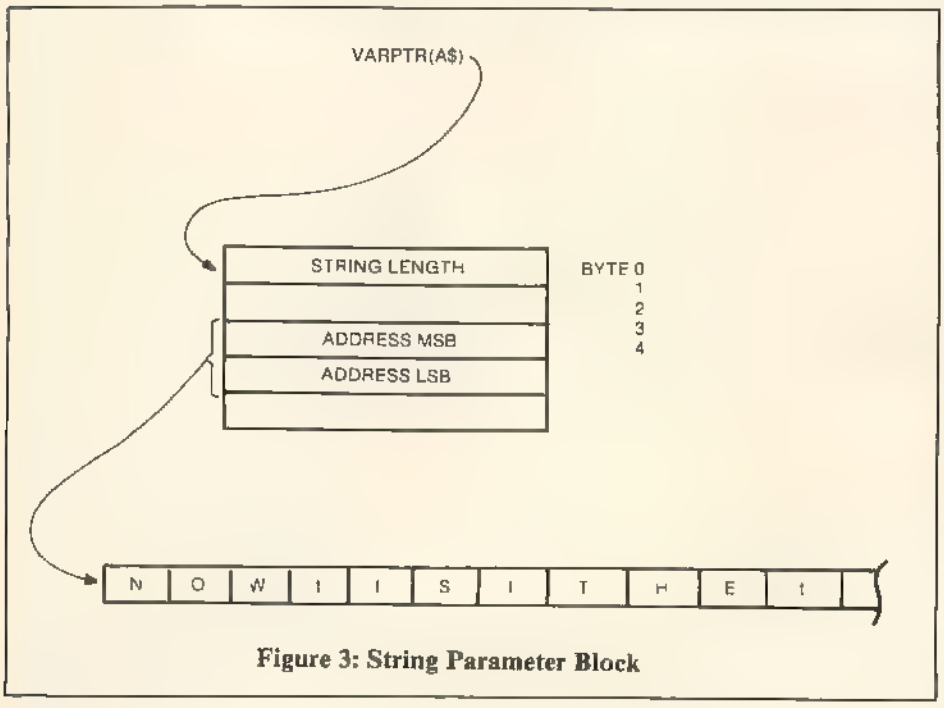

Figure 3: String Parameter Block

Relocatability

In our examples and in last month's column, we assumed for the most part the machine language code generated and stored in DATA statements started at a fixed location — &H3E00 in our examples. A typical assembly language program can't be stored and executed just anywhere in memory. Let's see why.

wherever the program was moved. The same thing applies to system memory areas like the text or graphics screens — they are at fixed locations.

The problem also applies to JMP and JSR instructions, which jump to locations specified by absolute addresses within the instruction, generated at assembly time. Branches, however, use relative addressing in which the effective address for the branc is computed by adding the contents of th program counter to a displacement valu within the instruction. Look at this pr gram·

```
3EØØ                ØØ1ØØ          ORG    $3EØØ
3EØØ 7E 3EØ5        ØØ11Ø FIRST    JMP    NEXT
3EØ3    ØØ          ØØ12Ø          FCB    Ø
3EØ4    ØØ          ØØ13Ø          FCB    Ø
3EØ5 2Ø F9          ØØ14Ø NEXT     BRA    FIRST
       ØØØØ         ØØ15Ø          END
```

This program doesn't do anything; it's a infinite loop. It does illustrate jumping an branching, however. The JMP NEXT ir struction assembles with a jump locatio (after the 7E op code) of 3E05. The BR/ FIRST, though, does not use an absolut address. Instead, it uses a displacemen value of F9. When this displacement valu is added to the contents of the progran counter, the result is the branch address. Th program counter always points to the nex instruction after the current one bein executed, in this case, at $3E07. Addin $3E07 and $F9:

```
  $3E07
+ $FFF9
  ----
  $3E00
```

The displacement value is "sign extended" to the left, which must be done for negative displacements of $FF through $80 (indicating branches backwards). Positive displacements of $00 through $7F (indicating branches forward) may be added without sign extension. In any event, the result is the jump address of $3E00. The BRA FIRST could have been replaced with a JMP FIRST instruction, but this instruction would have used three bytes instead of two bytes and not have been relocatable.

There's a way to make all instructions relocatable. It's a special addressing mode called "program counter relative." An example is shown here:

```
3EØØ                ØØ1ØØ          ORG    $3EØØ
3EØØ A6 8D ØØØ8     ØØ11Ø          LDA    ARG1,PCR
3EØ4 E6 8D ØØØ5     ØØ12Ø          LDB    ARG2,PCR
3EØ8 6E 8D ØØØ2     ØØ13Ø  FIRST   JMP    NEXT,PCR
3EØC    ØØ          ØØ14Ø  ARG1    FCB    Ø
3EØD    ØØ          ØØ15Ø  ARG2    FCB    Ø
3EØE FD ØØØØ        ØØ16Ø  NEXT    STD    BOTH
3E11 86 Ø1          ØØ17Ø          LDA    #1
```

The machine language assembled for the LDA ARG1,PCR starts off with an op code of A6, followed by an addressing mode byte of 8D. The addressing mode byte is used by the 6809 to determine how the address should be computed. In this case, the effective address is computed by adding the contents of the program counter to the displacement value of 0008, found in the third and fourth bytes of the machine language. The program counter points to $3E04 at this point so:

```
  $3E04
+ $0008
  ----
  $3E0C
```

he D register to an integer value and returns in the variable used on the left side of the USR call.

Here's a simple example of the whole process. The assembly language subroutine adds one to an input argument and returns the incremented value. It's a useless subroutine, but it'll give you a better idea of how the process works.

```
10  TRIVIAL AL SUBROUTINE
11 CLEAR 1000 &H3DFF                    protect memory
12 CLS
13 FOR I=&H3E00 to &H3E09               move mach lang
14 READ A  POKE I A
15 NEXT I
16 DEFUSR0=&H3E00                       define start of ml
17 INPUT "VALUE=",V                     input value
18 V = USR0(V)                          call al subroutine
19 PRINT "VALUE NOW"  V                 return and print
20 GOTO 170                             loop
100 DATA &HBD &HB3,&HED &HC3,&H00,&H01
200 DATA &HBD &HB4,&HF4,&H39
```

The assembly language code for this is:

```
0000 BD B3ED   0010      JSR    $B3ED   'convert input
0003 C3 0001   0011      ADDD   #1      'bump by one
0006 BD B4F4   0012      JSR    $B4F4   'reconvert
0009 39        0013      RTS            return
```

As you can see from the assembly language program, the only processing actually done in the program is to add one to the contents of the D register. The first JSR converts the input argument (found in variable V in the BASIC program) to a value in D. The second JSR reconverts the contents of D (now V plus one) to variable V for output. The RTS, of course, just returns to BASIC.

Packing Arguments

Although only one integer value is allowed, there's no reason several arguments can't be packed into that single value. Suppose you have an assembly language subroutine to move a character around the screen. The inputs to the subroutine would be the character and the speed of movement. These two arguments could be packed into the single 16-bit integer value of the USR call by doing this:

```
100  MOVE CHARACTER SUBROUTINE
110 CLEAR 1000,&H3DFF                   protect memory
120 CLS
130 FOR I=&H3E00 to &H3EXX              move mach lang
140 READ A  POKE I A
150 NEXT I
160 DEFUSR0=&H3E00                      'define loc'n of al
170 INPUT "CHARACTER=" C$               'input character
175 INPUT "SPEED (0-255)=" S            'input speed
176 CLS
180 A = USR0( ASC((C$)*256+S)           'pack two arguments
200 GOTO 170                            'return here
```

The character is converted to an eight-bit ASCII code by the ASC(C$). It is then *packed* into the most significant byte of the input argument by the ASC(C$)*256. The speed is also an eight-bit value and is in the least significant byte of the input argument. In the assembly language subroutine, the two arguments appear in the D register as shown in Figure 1, after they have been converted by a JSR $B3ED.



Figure 1: Packing Two Arguments

This same scheme of packing multiple arguments can be used for input and output to pack as many as 16 single-bit arguments into the input or output parameter. On the input side, the arguments are packed by multiplying the value by a power of two so that it's shifted left and adding in other arguments. On the output side, the arguments are unpacked by ADDing and then dividing by the same power of two. Some examples are given in Figure 2.

ARG1	ARG2	ARG3	ARG4

```
Input
100 D=ARG1*4096+ARG2*256+ARG3*16+ARG4
110 A=USR0(D)

Output
110 A=USR0(D)
120 ARG1  INT(A/4096)
130 ARG2= INT((A-ARG1*4096)/256)
140 ARG3= INT((A-ARG1*4096 ARG2*256)/16)
150 ARG4=A-ARG1*4096-ARG2*256-ARG3*16
```

Figure 2: Packing Four Arguments

Parameter Block

Another way of passing multiple arguments to and from an assembly language subroutine is by a parameter block. The parameter block is a special area in memory set aside to hold input and output arguments. A simple example of this is shown in Listing 1, which is the partial assembly language listing of the move character subroutine. The first two bytes of the subroutine are reserved for the character and speed input parameters. The actual subroutine starts at &H3E02 rather than &H3E00.

The BASIC code for calling this subroutine is:

```
100  MOVE CHARACTER SUBROUTINE
110 CLEAR 1000,&H3DFF                   protect memory
120 CLS
130 FOR I=&H3E00 to &H3EXX              'move mach lang
140 READ A  POKE I A
150 NEXT I
160 DEFUSR0=&H3E00                      'define start of al
170 INPUT "CHARACTER=",C$               'input character
175 INPUT "SPEED (0-255)=",S            'input speed
176 CLS
180 POKE &H3E00, ASC(C$)                poke character value
190 POKE &H3E01, S                      'poke speed value
200 A = USR0(0)                         go to al subroutine
200 GOTO 170                            'return here
```

The USR call uses dummy arguments rather than packing the two input parameters into a single argument. The two input parameters are stored in &H3E00 and &H3E01 by two POKEs. As long as the input parameters are byte values (zero to 255), the POKEs work fine. The assembly language subroutine does not make a call to $B3ED, as there is no argument to convert. It simply picks up the first argument from &H3E00 (character) and puts it into A and the second argument from &H3E01 (speed) and puts it into B.

This concept can be used to pass any number of arguments. Just allocate a large enough chunk of memory to accommodate all of the input and output arguments and then do POKEs before the subroutine is called and PEEKs after the subroutine is called to access the arguments.

It's important to note that the parameter block holding input and output arguments must be in a protected portion of memory. Any address greater than the CLEAR address can be used, and the parameter block can be before or after the actual subroutine. Don't forget to specify the actual starting address of the subroutine, rather than the start of the parameter block, if the parameter block is located before the subroutine.

Using VARPTR

The VARPTR function in BASIC is also handy for passing parameters to assembly language subroutines. The VARPTR function returns an address to a specified variable. Suppose that you had a variable called AA. This code:

```
100 AA=3
110 B=VARPTR(AA)
120 PRINT PEEK(B) PEEK(B+1),PEEK(B+2),PEEK(B+3),
    PEEK(B+4)
```

prints 130, 64, 0, 0, 0. Where's the 3? That's a long story.

You'd expect to see a zero byte followed by a three byte, representing a binary integer number of three. However, Color Computer BASIC variables are always a "floating-point" format, even when you are working with integer limits, such as PEEKs and POKEs. The 130, 64, 0, 0, 0 represents a power of two equal to 130 minus 128 and a fraction of 0.11000000. The result is the power of two (2 squared or 4) multiplied by (½ + ¼) = 4 × (¾) = 3. This is not the easiest way to represent numbers, and it would be very tedious to have to convert to this floating-point format every time you wanted to pass parameters to assembly language. The floating-point representation is why the JSR $B3ED and JSR $B4F4 are used to convert and reconvert variables passed to and from assembly language subroutines.

There's nothing that says that a dummy variable cannot be used to store parameters, however. This code stores 100, 45, 233, 15 and 37 in the location of dummy variable AA. The location of the dummy variable AA is then passed to the assembly language subroutine. However, the assembly language subroutine must still go through the "convert" subroutine to get a 16-bit address value in D to point to dummy variable AA.

BASIC:

```
100 AA=0
110 B=VARPTR(AA)
120 POKE B,100  POKE B+1,45  POKE B+2,233  POKE B+3,15
    POKE B+4,37
130 DEFUSR0=&H3E00
140 A=USR0(B)
```

More Interfacing Tricks for Assembly Language and BASIC

By William Barden, Jr.
Rainbow Contributing Editor

Last month we described the elementary steps in tying together short assembly language subroutines with a BASIC program. Although assembly language is a more difficult language in which to write computer programs, it offers one big advantage over BASIC and other "high level" languages — speed. There are many things that can be done in assembly language that just cannot be done in other languages. In the last column we suggested you start using assembly language by interfacing, or joining together, short assembly language subroutines to improve your BASIC program's efficiency.

We discussed the difference between assembly language and machine language — machine language is made up of the binary data the 6809 recognizes as part of its instruction set while assembly language is a more English-like representation of instruction mnemonics. The assembly language form is translated into machine language by a program called the assembler, typically the Radio Shack *EDTASM+* assembler.

We also described some assembly language programs and mechanisms to interface them to BASIC. The BASIC statement that defines where in memory the assembly language code resides is DEFUSR, as in `110 DEFUSR = &H3E00`. The BASIC statement to actually make the jump is USRn, as in `180 A = USR0(0)`. Each assembly language subroutine must have an ending RTS instruction, which acts like a BASIC RETURN statement, returning to the point just after the USR call.

Before an assembly language subroutine can be used, however, the memory area in which it is to reside must be protected by a BASIC CLEAR statement, as in `110 CLEAR 1000,&H3DFF`. This prevents BASIC from overwriting the machine language bytes as it stores data such as strings and its own internal variables. The machine language code making up the assembly language subroutine is moved into this protected area by loading a machine language program from disk or cassette, or by reading DATA statements in BASIC and doing a series of POKEs. We chose the POKE route for our examples.

The USRn statement in BASIC has an argument in it that represents an integer value. A single integer value can be passed to the assembly language subroutine by this argument in a statement such as `180 A = USR0(1000)`, which passes the value of 1,000. The assembly language subroutine may pass an argument back by the USR. The argument is returned in the variable on the left side of the USR statement; in this example, Variable A contains the result. However, it's perfectly all right to pass no arguments and to use dummy variables in the USR statement.

We'll continue with more tricks in interfacing assembly language with BASIC in this column

Passing Multiple Arguments to AL Subroutines

The argument passed to an assembly language subroutine must be an integer argument — a numeric expression, variable, or combination that can be resolved down to the value of 32768 through +32767. Here are some typical USR calls

```
10Ø A = USRØ(1ØØØ)
2ØØ VX = USR1(AC)
3ØØ AN = USR4(1ØØØ - ZT)
```

Passing One Argument

In the assembly language subroutine itself (as we saw last month), the code must do a JSR $B3ED to convert the input argument to a 16-bit value in the D register (the A and B accumulators). After this is done, the assembly language subroutine can use the input argument as required to define a delay, to point to a work area, to define a character, or any other application.

To pass an argument back to BASIC, a JSR $B4F4 is done in the assembly language code. This converts an output argument in

Bill Barden has written 27 books and over 100 magazine articles on various computer topics. His 20 years experience in the industry covers a wide background: programming, systems analyzing and managing projects ranging from mainframes to microcomputers.

he CD interface. The article also said that OS-9 operating language will be used in hese interfaces Have you heard about this r is it just another rumor?

Jim Casselman
Goodfellow AFB, TX

Jim, the 68000 microprocessor and Miroware were the hot subject of discussion t the last RAINBOWfest Microware has een awarded a contract to develop the perating system for Phillips and Sony, the wo pioneers in Compact Disc technology. t seems to be the next major breakthrough n storage media. I can't wait to see one.

Device Overload

● *I have a 64K Color Computer 1 with a J&M disk drive system and a DCM-5 Auto/Answer modem. How does one operate a disk controller, a DS-69A Digitizer, a* CoCoMax *joystick port and an RS-232C Deluxe Pak all at once? It is all on one switch, and obviously it would be very difficult to switch to each slot. This leaves the option of switching using software*

Jeff Wozniak
Apply Valley, MN

Even though you can both hardware-, and software-select a Multi-Pak slot, the address and data lines are connected to the device at all times, Jeff. This means by adding address decoding circuitry to the accessories you mention, they can all be resident at the same time. Remember, the CoCo can switch between these devices about 250,000 times a second

Nonexistent Clock Signal

● *I recently purchased a VIC 1525 graphics printer by Commodore. It resembles the DMP-100 printer by Radio Shack.*

I would like to use the 1525 with my CoCo. Can it be done? What wiring configuration do I make to connect serial I/O ports?

Philip Tack
Worthington, PA

Philip, according to the diagram you sent us, the VIC 1525 requires a clock signal from the computer. This signal is not present on the CoCo serial port.

Disk Drive Debate

● *I am debating buying a hard disk or a floppy disk drive. How compatible is an Amdek hard disk with the software on the market, and how much extra storage does it have?*

Byron Fast
Kleefeld, Manitoba

Byron, I am not aware of an Amdek hard disk. I do know that Amdek makes a 3½ inch floppy disk. It is the same as a 5¼ inch floppy disk, except it is packaged a little differently. It has the same storage capacity. I would recommend you have at least one 5¼ inch disk drive in your system.

New VDG for Older CoCos

● *The CoCo has an MC6847 Video Display Generator (VDG) that is less than perfect. Motorola has designed a new VDG, the MC6847T1, which will soon be released for full production. What does it do? It makes clearer symbols, changes the 'o' from square to circular, adds a slash to the zero and gives lowercase with descenders. The MC6847T1 has a data latch 74LS273 and a buffer 74LS244 on board.*

How can you use it? Find the VDG (MC6847T1) when released. Remove the 74LS273 from the circuit board and jumper the socket so the lines go straight through Use two sockets (40 pin) to make a jumper socket for the VDG. Jumper the data lines 3 through 8. Connect pin 10 to pin 25 with a 2.5K ohm resistor. This allows pseudo colors. Connect pins 12, 17 and 24. This disables the I/O lines not used by the CoCos. This is the area that replaces the 74LS244 (buffer). It would require extensive wiring to use it. Connect pin 13 of the VDG to pin 11 of the 74LS273 socket. This is the RAS signal and it stabilizes the output. Connect an SPDT switch by connecting one side to pin 1 of the VDG, center to pin 31 of the VDG, and the other side to pin 31 of the VDG socket. Make sure pins 12, 13, 25, 26 and 31 are not connected through to the circuit board side

What happened to the lowercase? This is caused by a ROM text screen 0 reset; to disable it use POKE 359,57. *The only problem with this poke is that if you are running a graphics program and have an error in it, the text screen does not come back with the error message. You must enter text screen. Next enter* POKE 65314,X.

If X is:	Text is:
0-7	Black letters on green uppercase and reverse video.
8-15	Red letters on orange uppercase and reverse video.
16-23	Black letters on green uppercase and lowercase.
24-31	Red letters on orange uppercase and lowercase.
32-39	Light green letters on dark green uppercase and reverse video.
40-47	Orange letters on red uppercase and reverse video.
48-55	Light green letters on dark green uppercase and lowercase.
56-63	Orange letters on red uppercase and lowercase
64-71	Dark green letters on light green uppercase and reverse video.
72-79	Red letters on orange uppercase and reverse video.
80-87	Black letters on light green with light green border uppercase and lowercase.
88-95	Red letters on orange with orange border uppercase and lowercase.
96-103	Light green letters on dark green uppercase and reverse video.
104-111	Orange letters on red uppercase and reverse video.
112-119	Light green on dark green uppercase and lowercase.
120-127	Orange letters on red uppercase and lowercase.
128-255	Graphics.

You can get data sheets on the MC6847 and MC6847T1 from Motorola, as well as any other component they produce, by requesting it.

William Capich
FPO, NY

Thanks for the information, William. There seems to be a lot of interest in the 6847T1, and due to your help we can all put one in our older CoCos now.

Memory Exploration

● *I'm writing a machine language program to allow exploring CoCo memory. I want it to work in 64K RAM mode without the ROM support. I have to build every routine and most of them are finished except two:*

INKEY *— I can't figure out how I can scan the PIA for the* SHIFT *key.*

RS-232 — I don't understand how to send information to the printer and how the timing process works.

Marc Gagnon
Cap-de-la-Madeleine, Quebec

Marc, you need to obtain a disassembly of BASIC to fully understand the INKEY$ and RS-232 routines. *Color BASIC Unravelled* will do nicely.

If you want to try on your own, the INKEY$ routine starts at $A564. The test for the SHIFT key routine is at $A22E. The RS-232 output routine starts at $A2BF. All of the above addresses are for Color BASIC 1.2. Good luck.

Your technical questions are welcomed. Please address them to: Downloads, THE RAINBOW, P.O. Box 385, Prospect, KY 40059. We reserve the right to publish only questions of general interest and to edit for space and clarity. Due to the large volume of mail we receive, we are unable to answer letters individually.

Your technical questions may also be sent to us through the MAIL section of our new Delphi CoCo SIG. From the CoCo SIG> prompt, pick DELPHI MAIL, then type SEND **and address TO: DANDOWNARD. Be sure to include your complete name and address.**

Non-Standard Disk Drive Troubles

By Dan Downard
Rainbow Technical Editor

• *I have a problem with a Tandon Disk drive I system. I own a 64K Extended BASIC CoCo 2 and a TRS-80 Drive 0 with Disk BASIC 1.1 (Cat. No. 26-3029).*

When the Tandon Drive 1 is connected, it works fine, but when I try to use my Radio Shack Drive 0, I always get an I/O Error. To use the Radio Shack Drive, I have to disconnect or turn off the Tandon Drive.

When both are connected, the indicator light on the Radio Shack Drive goes on, but the head inside the Tandon Drive goes back and forth searching for the program or tries to read a directory for Drive 0.

Ben Takemura
Honolulu, HI

Ben, it appears that the drive select lines on your Drive 1 are being enabled for both Drive 0 and Drive 1. A normal disk drive uses two pins for drive select and has binary decoding circuitry to distinguish which drive it's supposed to be. CoCo disk systems use a separate drive select pin for each of four possible drives.

Get a copy of the RAINBOW for July 1985 and read "Getting On the Right Track" by Colin Stearman. This is an excellent article discussing the use of non-standard disk drives (non-Tandy) with a CoCo.

Dan Downard is an electrical engineer and has been involved in electronics for 27 years through ham radio (K4KWT). His interest in computers began about eight years ago and he has built several 68XX systems.

Keep Your Cool

• *Some time ago someone offered a schematic to change the RS Modem I to auto-answer (and possibly auto-dial). I would like some information, please.*

I own an F board and am running 64K, one drive, 1.1 Disk BASIC and 1.1 Color BASIC. I have upgraded to 150 ns 64K chips, a 68B09E and a 68B21. I am able to run the CoCo in 3x mode and, about 50 percent of the time, retain graphics. Is there anything I can do about the 2N6594 transistor which creates a heat problem? I replaced it with heavy-duty NTE219 and heat sunk it, but I still need to run a fan on it.

Kenneth Harman
Bakersfield, CA

You are correct Kenneth. In the November 1984 RAINBOW, Tony Sharp wrote an article on how to convert a Modem I to auto-answer. It was titled "Adding an Auto Answer."

The only thing a heat sink does is allow the heat to dissipate. Unless the heat sink is external to the computer, the heat stays inside until air from the ventilation holes cool it. It's best not to block the ventilation holes by enclosing your computer If you do, it's necessary to add a fan to get rid of the heat.

Elusive I/O Error

• *I am 12 years old and I own a 64K Color Computer 2 and a CCR-82 cassette recorder. Whenever I try to load a long program I receive an I/O Error. Sometimes, such as early morning, everything works fine. When I take my equipment to Radio Shack it works great! I take it home and it doesn't work.*

I have tried everything, cleaning the heads, turning off different appliances etc., but it still does not work. Any help would be appreciated.

Josh Alkire
Toledo, OH

It sounds like you have some type of power line disturbance in your home, Josh. I suggest you operate the tape recorder from batteries just to see if it's the power line

Half-Power 64K?

• *I have a 64K ECB CoCo and a cassette recorder. I know that without a disk drive and operating system I can only access 32K RAM. Does this mean I only have a 32K system or can I run cassette programs like* The Sailor Man *that require 64K?*

Mike Frei
Horicon, WI

Mike, you don't need a disk drive, or an operating system to use 64K in your CoCo. You can indeed play your favorite 64K games from tape. A disk operating system allows for more efficient use of your 64K, but it's not necessary.

CD Rumors A-flyin'

• *I read in the Computer Shopper that the 68000 processor will be used as the CPU for*

```
00300          FDB     JPORT-JOYTAB    INPUT
00400          FDB     GETMAX-JOYTAB
00500          FDB     XPAD-JOYTAB
00600          FDB     HIRES JOYTAB
00700
00800 JOYSTK   LDA     JOYTYP,U        GET JOYSTICK TYPE
00900          LSLA                    MUL BY 2 FOR 16 OFFSET
01000          LEAX    JOYTAB,PCR      GET VECTOR OFFSET TABLE INPUT
01100          LDD     A,X             GET OFFSET FOR THAT ONE
01200          JMP     D,X             CALL THE INPUT READING
01300
01400 *THIS ONE READS JOYSTICK POSITION FROM HI-RES INTERFACE FROM R-S
01500 HIRES    CLRA                    SELECT RIGHT JOYSTICK
01600          BSR     BUTSTA          AND GET BUTTON STATUS
01700          LDD     YJOY,U          GET OLD X & Y POSITION
01800          COM     FLIP,U          DO THE READING 30 TIMES A SEC.
01900          BMI     HIRES9          (SKIP READING 1/2 THE TIME')
02000
02100          LDX     #$FF00          BASE ADDRESS OF PORTS
02200          LDA     $23,X           GET THE SOUND ON/OFF BIT
02300          LDB     $20,X           AND DAC BITS
02400          PSHS    D               SAVE THEM
02500          ANDA    #$F7            TURN OFF SOUND
02600          STA     $23,X
02700
02800          LDA     1,X             GET THE L S BIT AND
02900          LDB     3,X             M S BIT OF THE JOY SELECTOR
03000          PSHS    D               SAVE THEM
03100
03200          ANDB    #$F7            SELECT JOYSTICK 0
03300          STB     3,X
03400          ORA     #8              AND SELECT Y INPUT OF JOYSTICK
03500          STA     1,X
03600
03700          BSR     HIRES1          READ Y VAL 0-255
03800          LDA     #192            MAKE IT 0 TO 191
03900          MUL
04000          PSHS    A               SAVE THE Y POSITION
04100
04200          LDA     1,X             SELECT X INPUT FOR READING
04300          ANDA    #$F7            BY RESET LSB OF SELECTOR
04400          STA     1,X
04500          BSR     HIRES1          DO A 0 TO 255 READING
04600          LSRB                    MAKE IT 0 TO 127 FOR X
04700          PULS    A               GET SAVED Y POSITION
04800          TFR     D,Y             SAVE BOTH X & Y
04900
05000          PULS    D               GET OLD DATA OF SELECTOR
05100          STA     1,X             AND RESTORE THE PORTS
05200          STB     3,X
05300
05400          PULS    D               GET SOUND ON/OFF AND DAC DATA
05500          STB     $20,X           AND RETORE
05600          STA     $23,X
05700          TFR     Y,D             LOAD UP X & Y VAL (SAVED IN Y)
05800 HIRES9   RTS                     EXIT
05900
06000 * THIS IS A HI-RES INTERFACE READ (0 TO 255)
06100 HIRES1   PSHS    CC              SAVE IRQ & FIRQ FLAGS
06200          LDA     #$FF            USE DAC (OF CASSETTE) TO RESET
06300          STA     $20,X           THE TIMING RAMP GEN
06400          LDA     #45             THIS SHOULD DO IT
06500 HIRES2   DECA                    DO A TIMING LOOP
06600          BNE     HIRES2
06700
06800          LDD     #2*256+126      USED TO START TIMING RAMP
06900          ORCC    #$50            DISABLE IRQ & FIRQ
07000          STA     $20,X           START TIMEING RAMP
07100 HIRES3   DECB
07200          BNE     HIRES3
07300 HIRES4   LDA      X              HAS J STICK MATCH RAMP?
07400          BMI     HIRES5          YES, THEN EXIT LOOP
07500          NOP                     MAKE LOOP THE RIGHT TIMING
07600          NOP
07700          NOP
07800          INCB                    NO, DOWN COUNT THEN
07900          BNE     HIRES4          IF NO TIME OUT THEN LOOP AGAIN
08000
08100          DECB                    MAKE IT 255 IF TIMED OUT
08200 HIRES5   PULS    PC,CC           EXIT WITH ERROR (RESTORE IRQS)
08300
08400
08500 *THIS DOES A BUTTON READ OFF THE RIGHT/LEFT JOYSTICK
08600 BUTSTA   PSHS    A               SAVE RIGHT/LEFT FLAG
08700          LDX     #$FF00          POINT TO THE I/O PORT
08800          LDA     2,X             GET THE KEY SELECT DATA
08900          LDB     #$FF            SELECT NO KEYS
09000          STB     2,X             TO READ JUST THE BUTTONS
09100          PULS    B               GET RIGHT/LEFT BUTTON SELECT
09200          INCB                    MAKE IT "01"(R) OR "10" (L)
09300          COMB                    MAKE SELECTED BIT ZERO
09400          ORB     ,X              IS GET THAT BUTTON BIT
09500          STA     2,X             RESTORE KEY SELECT DATA
09600          COMB                    MAKE IT A ONE IF PRESS
09700          ANDB    #3              ONLY RIGHT/LEFT BUTTON BITS!
09800          STB     BUTDWN,U        UPDATE BUTTON DOWN STATUS
09900          RTS                     AND EXIT
10000
10100 *THIS ONE READS THE 6 DAC PORT FOR THE RIGHT/LEFT JOYSTICKS
10200 JPORT    LDA     JOYTYP,U        GET RIGHT/LEFT FLAG
10300          BSR     BUTSTA          GET BUTTON DOWN STATUS
10400          PSHS    U               SAVE VARIABLE BLOCK POINTER
10500          LDX     #$FF00          POINT TO I/O PORTS
10600          LDA     $23,X           GET SOUND ON BIT
10700          LDB     $20,X           AND DAC LEVEL DATA
10800          TFR     D,Y             AND SAVE THEM
10900          ANDA    #255-8          TURN OFF SOUND BIT
11000          STA     $23 X
11100
11200          LDA     1,X             GET JOYSTICK/AUDIO
11300          LDB     3 X             SELECTOR BIT
11400          TFR     D,U             AND SAVE THEM TOO
11500          ORA     #8              SELECT Y READING
11600          STA     1,X
11700          ANDB    #$FF-8          SET RIGHT JOYSTICK FOR NOW
11800          PSHS    B               AND SAVE IT OR NOW
11900          LDB     JOYTYP+DATA,PCR    GET RIGHT/LEFT FLAG
12000          LSLB                    PUT THE BIT (0) IN BIT 2
12100          LSLB
12200          LSLB
12300          ORB     ,S+             NOW SELECT LEFT/RIGHT
12400          STB     3,X
12500
12600          BSR     JOYSK0          DO 6 BIT DAC READ FOR Y
12700          LDA     #3              AND MAKE THE 0 TO 63
12800          MUL                     TO 0 TO 189 STEPS OF 3
12900          PSHS    B               AND SAVE IT
13000          LDA     1,X             NOW SELECT X POSITION
13100          ANDA    #255-8          BY RESETTING THE SELECT BIT
13200          STA     1,X
13300          BSR     JOYSK0          DO 6 BIT DAC FOR X POSITION
13400          LSLB                    MAKE 0 TO 63 TO 0 TO 126 STEP 2
13500          PSHS    B               SAVE IT FOR NOW
13600          TFR     U,D             RESTORE JOY/AUTO
13700          STB     3 X             SELECTOR
13800          STA     1,X
13900
14000          TFR     Y,D             RESTORE SOUND ON BIT AND DAC
14100          STB     $20,X
14200          STA     $23,X
14300          PULS    B               GET X POSITION DATA
14400          PULS    PC,U,A          GET Y POSITION DATA AND EXIT
14500
14600 JOYSK0   LDD     #$4080          START DAC LEVEL
14700 JOYSK1   PSHS    A               SAVE START NUMBER
14800          ORB     #2              MAKE PRINTER HIGH
14900          STB     $20,X           SEND IT TO THE DAC
15000          EORB    #2              REMOVE PRINTER BIT
15100          LDA     ,X              IS IT ABOVE OR BELOW?
15200          BMI     JOYSK2          SKIP IF ABOVE
15300
15400          SUBB    ,S              REMOVE 1/2 IF BELOW
15500          BRA     JOYSK3
15600
15700 JOYSK2   ADDB    ,S              ADD 1/2 IF ABOVE
15800 JOYSK3   PULS    A
15900          LSRA
16000          CMPA    #1
16100          BNE     JOYSK1          LOOP 6 TIMES
16200          LSRB                    PUT THE DAC BITS IN 0-5 BIT
16300          LSRB                    FOR JOYSTICK VAL
16400          RTS                     AND EXIT
16500
16600 XPAD     LDB     $FF60           GET X-PAD X POSITION
16700          LSRB                    MAKE IT 0 TO 127
16800          LDA     $FF61           GET X-POS Y POSITION
16900          PSHS    D               SAVE IT FOR UPDATEING
17000          LDB     $FF62           GET STATUS OF X PAD
17100          BITB    #2              IS PEN IN PROXIMITY?
17200          BNE     XPAD1           DON'T UPDATE JOYVAL IF NOT
17300          LDD     YJOY,U          ELSE GET OLD X & Y POSITION
17400          STD     ,S              AND SAVE IT
17500          CLRB                    MAKE PEN UP (NOT PRESSED)
17600          BRA     XPAD9           DO NOT LOOK AT NEW X & Y
17700 XPAD1    BITB    #4              IS PEN IN X MARGIN?
17800          BEQ     XPAD2           YES, THEN USE IT
17900          LDA     XJOY,U          GET THE OLD X POSITION
18000          STA     1,S             UPDATE THE OLD X VAL
18100
18200 XPAD2    BITB    #8              IS PEN IN Y MARGIN?
18300          BEQ     XPAD9           YES, THEN UPDATE
18400          LDA     YJOY,U          ELSE USE OLD Y POSITION
18500          STA     ,S              UPDATE THE OLD Y VAL
18600 XPAD9    ANDB    #1              GET PEN STATUS
18700          STB     BUTDWN U
18800          PULS    PC,D            EXIT READ X-PAD
18900
19000 GETMAX   PSHS    D               SETUP TEMP FOR JOY VAL
19100          LDX     #$FF90          POINT TO COCO MAX PORT
19200          BSR     READMX          READ PORT AND SKIP IT
19300          BSR     READMX          READ PORT
19400          LDB     #192            AND MAKE  0 TO 255 TO
19500          MUL                     0 TO 191
19600          STA     ,S              FOR Y POSITION
19700          BSR     READMX          READ PORT
19800          LSRA                    MAKE IT 0 TO 127
19900          STA     1,S             AND SAVE X POSITION
20000          BSR     READMX          READ PORT
20100          COMA                    FOR BUTTON
20200          ANDA    #128            <128 THEN DOWN
20300          STA     BUTDWN,U        >127 THEN UP
20400          PULS    PC,D            GET X & Y AND EXIT
20500
20600 READMX   LDA     ,X+             READ COCO MAX PORT
20700          LDB     #10             DO A TIME DELAY LOOP
20800 RDMX1    DECB
20900          BNE     RDMX1
21000          RTS                     AND EXIT
```

```
0260          CMPB    #128-12         NOW TEST IF PART OF X LEN OFF
0270          BHS     CURON0          OF SCREEN (SKIP IF SO)
0280          JOM     FAST,U          DO FAST CURSOR DRAW ALL ON SCREEN
0290
0300 CURON0   PSHS    B               SAVE X POSITION
0310          TFR     X,U             LOAD U WITH CURSOR SHAPE DATA
0320
0330          CMPA    #192+5          IS THE LINE A NEGATIVE LINE?
0340          PSHS    CC              SAVE TEST FLAGS
0350          BLO     CURON1
0360          NEGA                    IF SO THEN MAKE POSITIVE LINE
0370 CURON1   LDB     #32             CONVERT LINE TO MEMORY POSITION
0380          MUL
0390          PULS    CC              GET TEST FLAGS
0400          BLO     CURON2          SKIP IF PLUS
0410          COMA                    NEG THE D REG
0420          COMB
0430          ADDD    #1
0440 CURON2   ADDA    SSTART          OFFSET TO BASIC SCREEN POSITION
0450          TFR     D,X             AND PUT IN 16-BIT POINTER
0460          LDB     ,S              GET X POSITION
0470          ASRB                    GET BYTE POSITION ON SCREEN
0480          ASRB                    BY 1/4
0490          STB     STRIP+DATA,PCR  SAVE FOR COUNTING LATER
0500          LEAX    B,X             ADD IT TO THE SCREEN POINTER
0510          STX     MEMPOS+DATA,PCR AND MEMORY POINTER TOO
0520          PULS    A               GET THE X POSITION
0530          ANDA    #3              GET THE OFFSET INTO THE BYTE ON LINE
0540          LDB     #3*16*2         SIZE OF SHAPE
0550          MUL                     MUL IT BY THE SHAPE SIZE IN "B"
0560          LEAU    D U             AND OFFSET THE SHAPE POINTER BY IT
0570
0580          LDA     #16             NUMBER OF LINE IN CURSOR OF DATA
0590          LDB     FAST+DATA,PCR   DO WE DO A FULL OR PART DRAW?
0600          BNE     ONFAST          SKIP IF FAST!
0610
0620 CURON3   CMPX    SSTART          IS THIS LINE ABOVE THE SCREEN?
0630          BLO     CURON6          SKIP IF OFF THE SCREEN
0640          PSHS    X,U,A           SAVE POINTER AND Y-COUNT
0650          LDA     #3              3 BYTE PER LINE
0660          LDB     STRIP+DATA,PCR  GET (BYTE) LINE POSITION
0670 CURON4   CMPB    #32             ARE WE TO FAR LEFT/RIGHT?
0680          BHS     CURON5          SKIP THIS BYTE IF SO
0690          CMPX    SEND            IS THE BYTE ABOVE SCREEN?
0700          BHS     CURON5          SKIP BYTE IF SO
0710          PSHS    A               SAVE X COUNTER
0720          LDA     ,X              GET DATA OFF THE SCREEN
0730          STA     ,Y+             SAVE IT IN UNDER BUFFER
0740          ANDA    ,U              AND IT WITH MASK OF CURSOR
0750          EORA    3*16,U          THEN FLIP BITS WITH EOR DATA
0760          STA     ,X              AND PLACE IT ON THE SCREEN
0770          PULS    A               GET X COUNT
0780 CURON5   LEAX    1,X             MOVE NEXT BYTE ON THE LINE
0790          LEAU    1,U             AND NEXT BYTE IN SHAPE DATA
0800          INCB                    MOVE TO NEXT BYTE STRIP
0810          DECA                    DONE WITH THIS LINE?
0820          BNE     CURON4          NO, LOOP BACK THEN
0830          PULS    X,U,A           RESTORE POINTERS TO START OF LINE
0840 CURON6   LEAX    32,X            MOVE SCREEN POINTER TO NEXT LINE
0850          LEAU    3,U             MOVE SHAPE POINTER TO NEXT LINE
0860          DECA                    ARE ALL LINES DONE?
0870          BNE     CURON3          NO, LOOP BACK
0880          PULS    PC,CC,U         RESTORE IRQS, VAR POINTER & EXIT
0890
0900 *THIS IS A FAST CURSOR DRAWER
0910 ONFAST   STA     COUNT+DATA,PCR  SET LINE COUNTER
0920 ONFST1   LDD     ,X              GET FIRST 2 BYTES OF LINE
0930          STD     ,Y++            SAVE THEM IN UNDER BUFFER
0940          ANDA    ,U              AND THE MASK DATA
0950          EORA    16*3,U          FLIP DATA TOO
0960          ANDB    1,U             NOW THE NEXT BYTE ON LINE
0970          EORB    16*3+1,U
0980          STD     ,X++            PUT BOTH ON SCREEN
0990 CUROF5   LEAX    32,X            MOVE TO NEXT LINE
1000          DECA                    ARE ALL LINES DONE?
1010          BNE     CUROF1          NO, THEN LOOP BACK
1020          PULS    PC,CC           TURN ON IRQS AND EXIT
1030
1040 OFFAST   STA     COUNT,U         SET UP LINE COUNTER
1050 OFFST1   LDD     ,Y++            GET FIRST 2 BYTE OF UNDER DATA
1060          STD     ,X++            AND PUT IT ON SCREEN
1070          LDB     ,Y+             GET LAST BYTE ON LINE OF UNDER
1080          STB     ,X              AND PUT IT TOO ON SCREEN
1090          LEAX    32-2,X          MOVE TO NEXT LINE ON SCREEN
1100          DEC     COUNT U         ALL LINES DONE?
1110          BNE     OFFST1          LOOP IF NOT
1120          PULS    PC,CC           TURN OF IRQS AND EXIT
1130
1140 *DISABLE HOUSE SOFTWARE (UNLINK) (#5)
1150 DSABLE   LBSR    TURNOF          TURN OFF CURSOR IF ON SCREEN
1160          LDX     OLDIRQ,U        GET OLD IRQ VECTOR
1170          STX     $10D            AND PUT IT BACK
1180          LDD     OLDIO,U         GET OUTPUT VECTOR
1190          STD     $168            AND PUT IT BACK
1200          LDD     OLDCOM,U        GET OLD COMMAND TABLE VECTOR
1210          STD     $123            AND PUT IT BACK
1220          CLRB                    RETURN A ZERO FOR FUCTION
1230          RTS                     AND EXIT
1240
1250 * SELECT TYPE OF JOYSTICK TO USE (9 13)
1260 *  9 = RIGHT JOYSTICK
1270 * 10 = LEFT  JOYSTICK
1280 * 11 = COCO MAX HI-RES INPUT MODULE
1290 * 12 = RADIO SHACK X-PAD
1300 * 13 = HI RES JOYSTICK INTERFACE
1310 SELJOY   SUBB    #9              FIRST SELECT COMMAND (RIGHT)
1320          STB     JOYTYP,U        SELECT JOYSTICK TYPE
1330          RTS                     AND EXIT
1340
1350 *THIS IS THE IRQ PATCH FOR THE HOUSE SOFTWARE
1360 IRQ      LEAU    DATA,PCR        SETUP VARIABLE POINTER
1370          LDX     NEWJOY,U        GET THE NEW JOYSTICK X & Y POSITION
1380          LDA     HOLD U          MAKE SURE THAT CURSOR IS OFF IF
1390          ORA     CSTAT,U         ON HOLD
1400          CMPA    #64             IF CURSOR IS TURNED OFF OR HOLD
1410          BEQ     IRQ1            >0 THEN REMOVE CURSOR    ELSE
1420          CMPX    YJOY,U          IS THE OLD AND POSITION THE SAME?
1430          BEQ     IRQ2            SKIP DRAW CURSOR THEN
1440          PSHS    X               SAVE NEW X & Y POSITION
1450          LBSR    CUROFF          REMOVE CURSOR
1460          PULS    X               RESTORE NEW X & Y POSITION
1470          LDA     HOLD,U          IS CURSOR ON HOLD?
1480          BNE     IRQ2            SKIP IF SO
1490          LDA     ,X              GET LAST BYTE ON LINE
1500          STA     ,Y+             SAVE IN UNDER BUFFER
1510          ANDA    2,U             AND WITH MASK
1520          EORA    2+16*3,U        FLIP WITH DATA
1530          STA     ,X              PUT ON SCREEN
1540          LEAU    3,U             GOTO NEXT LINE IN SHAPE
1550          LEAX    32-2,X          SKIP TO NEXT LINE ON SCREEN
1560          DEC     COUNT+DATA,PCR  ARE ALL LINES DONE
1570          BNE     ONFST1          NO, LOOP BACK
1580          PULS    PC,U,CC         RESTORE IRQS, VAR POINTER & EXIT
1590
1600 * TURN OFF CURSOR (#0)
1610 TURNOF   PSHS    CC              SAVE IRQ FLAGS
1620          ORCC    #$50            TURN OFF IRQS
1630          LDB     CSTAT,U         GET CURSOR STATUS FLAG
1640          ANDB    #255-64         DISABLE DRAWING CURSOR ON IRQ
1650          STB     CSTAT,U         AND SAVE NEW STATUS
1660          BSR     CUROFF          REMOVE CURSOR IF ON SCREEN
1670 OEXIT    PULS    PC,CC           TURN ON IRQS AND EXIT
1680
1690 CUROFF   PSHS    CC              SAVE IRQ FLAGS
1700          ORCC    #$50            TURN OFF IRQS
1710          LDB     CSTAT U         GET CURSOR STATUS
1720          BPL     OEXIT           EXIT NO CURSOR ON SCREEN
1730          ANDB    #127            SET CURSOR ON SCREEN FLAG
1740          STB     CSTAT,U         TO OFF AND SAVE
1750          LEAY    CURBUF PCR      GET BUFFER OF DATA UNDER CURSOR
1760          LDX     MEMPOS,U        GET SCREEN (MEM) POSITION OF CURSOR
1770
1780          LDA     #16             NUMBER OF LINES OF CURSOR
1790          LDB     FAST,U          WAS CURSOR DRAWN FAST OR CLIPED?
1800          BNE     OFFAST          SKIP IF FAST!
1810
1820 CUROF1   CMPX    SSTART          IS MEMORY POINTER BELOW SCREEN?
1830          BLO     CUROF5          SKIP IF SO
1840          PSHS    A,X             SAVE SCREEN POINTER & LINE COUNTER
1850          LDB     STRIP,U         GET BYTE X POSITION
1860          LDA     #3              3 BYTES PER LINE
1870          STA     COUNT,U         SET X COUNTER WITH IT
1880 CUROF2   CMPB    #32             TOO FAR LEFT OR RIGHT?
1890          BHS     CUROF3          SKIP IF SO
1900          CMPX    SEND            IS MEMORY POINTER ON SCREEN?
1910          BHS     CUROF3          SKIP IF OFF SCREEN
1920          LDA     ,Y+             GET UNDER CURSOR BYTE
1930          STA     ,X              PUT IT ON SCREEN
1940 CUROF3   LEAX    1,X             MOVE TO NEXT BYTE ON LINE
1950          INCB                    MOVE INDEX COUNTER
1960          DEC     COUNT,U         ARE ALL BYTE DONE ON THIS LINE?
1970          BNE     CUROF2          NO, THEN LOOP BACK
1980          PULS    X,A             GET START OF LINE POINTER & COUNTER
1990 IRQ1     STX     YJOY,U          UPDATE CURSOR POSITION
2000          LBSR    CURON           DRAW CURSOR
2010          BRA     IRQ3
2020 IRQ2     LDB     HOLD,U          ARE WE ON HOLD?
2030          BEQ     IRQ3            SKIP IF NOT
2040          DEC     HOLD,U          COUNT IT TILL ZERO THEN
2050
2060 IRQ3     LEAX    <IRQ5,PCR       SETUP RETURN ADDRESS
2070          PSHS    X               PUT IT ON STACK FOR AN RTI
2080          PSHS    U,Y,X,D,CC,DP   FILL IN THE REST OF RTI STACK DATA
2090          JMP     [OLDIRQ,U]      CALL BASIC'S IRQ VECTOR
2100
2110 IRQ5     BSR     JOYSTK          NOW WE ARE BACK, DO JOYSTICK READ
2120          STD     NEWJOY,U        AND SAVE THE X & Y POSITIONS
2130          LDB     BUTDWN,U        GET BUTTON UP/DOWN FLAG
2140          LDA     BUTCNT,U        AND BUTTON DE-BOUNCE COUNTER
2150          BEQ     IRQ6            SKIP IF AT ZERO
2160
2170          TSTB                    IS BUTTON PRESSED?
2180          BNE     IRQ7            RESTART BUTTON COUNT (SKIP TO IT)
2190          DEC     BUTCNT,U        ELSE DEC DEBOUCE COUNT
2200          BRA     IRQ9            SKIP (ALL DONE HERE)
2210
2220 IRQ6     TSTB                    IS BUTTON UP?
2230          BEQ     IRQ9            SKIP IF SO
2240          STB     BUTTON,U        SET JUST PRESSED FLAG
2250 IRQ7     LDA     #2              RESET DE-BOUNCE COUNTER
2260          STA     BUTCNT,U
2270 IRQ9     RTI                     EXIT IRQ
```

Listing 3:

```
0010 * JOYSTICK DRIVERS
0020 JOYTAB   FDB     JPORT-JOYTAB    VECTOR TABLE FOR DOING JOYSTICK
```

```
1170          STX     $168            AND SET SYSTEM WITH IT
1180          CLR     PMODE,U         CLEAR (RESET) PRINTING MODE
1190          LDX     $123            GET ADDRESS OF COMMAND TABLE
1200          LDB     $127            GET # OF COMMANDS
1210          CMPB    #$35            IS IT 53 COMMANDS?
1220          BNE     COMERR          SKIP ADDING @ IF NOT
1230
1240          LEAY    COMBUF,PCR      GET SPACE FOR HOLDING TABLE
1250          LSLB                    2 BYTES PER COMMANDS (FOR COPY)
1260          STX     OLDCOM,U        SAVE OLD POINTER ADDRESS
1270          STY     $123            POINTER TO MOUSE COMMANDS BUF
1280 SLOOP    LDA     ,X+
1290          STA     ,Y+
1300          DECB
1310          BNE     SLOOP
1320
1330          LDD     COMBUF+7*2,PCR  GET ADDRESS OF OLD PRINT COMMAND
1340          STD     OLDPRT,U        SAVE FOR PATCH SUBR
1350          LEAX    NPRINT,PCR      GET ADDRESS OF THE PATCH FOR PRINT
1360          STX     COMBUF+7*2,PCR  UPDATE JUMP TABLE FOR NEW PRINT
1370 COMERR   PULS    X,Y,U,D         THEN RESTORE THE REGS
1380
1390 USR1     TSTA                    IS THE VARIABLE A STRING OR NUMBER
1400
1410          BNE     USR9            EXIT IF STRING
1420          JSR     $B3ED           PUT FUNCTION NUMBER IN THE D REG
1430          CMPD    #LASTCM         IS IT TOO BIG?
1440          BHI     USR9            EXIT IF SO
1450          PSHS    X,Y,U,B         SAVE SOME REGS
1460          LEAU    DATA,PCR        SET U REG TO VARIABLE BLOCK
1470          LEAY    COMTAB,PCR      GET FUNCATION (COMMANDS) TABLE
1480          LSLB                    MUL FUNCTION BY 2 (16 BIT)
1490          LDD     B,Y             GET OFFSET FROM TABLE
1500          LEAY    D,Y             ADD IT TO Y FOR ADDRESS OF IT
1510          PULS    B               RESTORE FUNCTION NUMBER IN B REG
1520          JSR     ,Y              AND CALL THE FUNCTION
1530          PULS    X,U,Y           RESTORE OTHER REGS
1540          CLRA            CLR TOP HALF OF 16 BIT RETURN
1550          JMP     $B4F4   CONVERT D REG TO NUMBER & EXIT
1560
1570
1580 * GET X POSITION FUCTION (#2)
1590 GETX     LDB     XJOY,U          GET CURSOR X POSITION
1600 USR9     RTS                     AND RETURN IT
1610
1620 * GET Y POSITION FUCTION (#3)
1630 GETY     LDB     YJOY,U          GET CURSOR Y POSITION
1640          RTS                     AND RETURN WITH IT
1650
1660 GETBUT   LDB     BUTTON U        GET JUST PRESS BUTTON FLAG
1670          CLR     BUTTON,U        AND RESET THAT FLAG
1680          RTS                     THEN EXIT
1690
1700 GETDWN   LDB     BUTDWN,U        GET BUTTON UP/DOWN STATUS
1710 GEXIT    RTS                     AND EXIT
4000
4010 * MY ASSEMBLER USES "+GET" TO INCLUDE A FILE WHEN THE SOURCE CODE
4020 * IS TOO BIG FOR ONE FILE
4030 * THE +GET IS LIKE "USE" IN THE OS-9 ASSEMBLER
4040
4042          +GET    MOUSE2          GET CURSOR DRAW CODE
4050          +GET    MOUSE3          GET JOYSTICK DRIVERS
4060          +GET    MOUSE4          GET SOUND & SCREEN DRIVERS
4062          +GET    MOUSE5          GET SOUND & SCREEN (PART 2)
4070          +GET    MOUSE6          GET CHR DATA FILE
4080
4090          FCC     'MOUSE VERSION 2.0 '
4100          FCC     'COPYRIGHT 1986 BY SRB SOFTWARE '
4110          FCC     'ALL RIGHTS RESERVED '
4130          FCC     'PUBLIC DOMAIN BY STEVE BJORK '
4150
4160 ENDPRG   EQU                     END OF PROGRAM POINTER
4170
4180          END
```

Listing 2:

```
0010 *MOUSE2/ASM    FILE NUMBER 2
0020
0030 TURNON   PSHS    CC              SAVE IRQ ENABLE FLAG
0040          ORCC    #$50            DISABLE IRQ CURSOR DRAW
0050          LDB     CSTAT,U         GET CURSOR STATUS
0060          ORB     #64             SET DRAW CURSOR FLAG
0070          STB     CSTAT,U         AND SAVE IT
0080          BSR     CURON           DRAW CURSOR IF NOT ALREADY ON
0090          PULS    PC,CC           TURN IN IRQ AND EXIT
0100
0110 CURON    LDB     CSTAT,U         IS CURSOR ON SCREEN ALREADY?
0120          BMI     CEXIT           SKIP IF SO
0130          BITB    #64             SHOULD CURSOR BE PLACED?
0140          BEQ     CEXIT           NO, THEN EXIT
0150
0160          PSHS    CC,U            SAVE BLOCK POINTER CPU STATUS
0170          ORCC    #$50            DISABLE IRQS
0180          ORB     #128            SET CURSOR STATUS TO SHOW
0190          STB     CSTAT,U         THAT CURSOR IS ON SCREEN
0200          LEAX    CURDAT,PCR      GET CURSOR SHAPE DATA
0210          LEAY    CURBUF,PCR      GET BUFFER FOR SAVE SCREEN UNDER IT
0220          LDD     YJOY,U          GET CURSOR POSITION
0230          SUBA    ,X+             UPDATE POSITION WITH HOT SPOT
0240          SUBB    ,X+             DATA FOR NEW POSITION
0250          CLR     FAST,U          RESET FAST FLAG TO CLIP DRAW
0260          CMPA    #192-16         IS THE FULL CURSOR ON THE SCREEN
0270          BHS     CURON0          SKIP IF PART OF Y OFF SCREEN
```

The Crossword Creator Contest

Can you create a totally symmetrical crossword puzzle using the *Word+* program and the specifications outlined in the accompanying article on Page 38 of the May 1986 issue of THE RAINBOW? If so, you may wish to enter The Crossword Creator Contest. And, if we choose to print your crossword puzzle, you will be awarded a special prize.

Send us a disk or cassette copy of the data file of your puzzle created by *Word+* along with a printed copy of the crossword puzzle — including the clues and answers. Be sure to put a title on the puzzle and if possible, follow a general interest theme.

Entries will be judged on the following criteria:

- Puzzle symmetry
- Number of words
- Spelling
- Creativity
- Thematic originality
- Understandability
- Ease of loading data
- Neatness
- Packaging

Enter as often as you like! Please note: We consider your act of entering the contest as consent to publish your creation.

The Crossword Creator Contest is open to all RAINBOW readers, advertisers and employees of Falsoft, Inc.

Send entries to:
Crossword Creator Contest
c/o THE RAINBOW
The Falsoft Building
P.O. Box 385
Prospect, KY 40059

cursor drawing, fast and clipped.

The cursor is put down byte by byte rather than dot by dot to speed up the drawing. If only one image of the cursor was used, there would be only 32 positions across the screen. But the shape data has four-image offset (0,1,2,3) to give 128 positions. Of course, there are 192 positions up and down.

TURNOF (Line 28300) is the turn off cursor function (zero). This subroutine resets the cursor-enable bit and turns off the cursor.

CUROFF is used to remove the cursor if it is on the screen. The cursor is removed by getting the old screen data from CURBUF and putting it on the screen. As with the cursor draw there are two types of removes, fast and clipped.

DSABLE is the subroutine for function number six, disable (or unlink) *The Mouse*. After turning off the cursor, the old interrupt, output and command vector are restored.

SELJOY is for functions nine to 13, select joystick type.

BASIC's 60-hertz interrupt vector is passed through IRQ to move the cursor, poll the joystick and button status. First the status cursor and HOLD flag are tested along with the joystick position to see if it has moved. If the cursor should be removed, then CUROFF is called. Next, if the cursor should be turned on (because of a new position or hold is no longer on), then CURON is called.

Lines 37800 to 38100 call BASIC's old interrupt subroutine. The disk drive MOTOROFF and TIMER function will still work. Before end, the interrupt subroutine, the joystick and button status are polled.

At the end of Listing 1 are three +GET instructions that include the other files needed to assemble the program. This +GET of my assembler is very similar to the USE directive of the OS-9 assembler.

The FCC in lines 40900 to 41300 adc the copyright text to the end of *The Mouse* program. ENDPRG is the length of the program.

Mouse 2 (Listing 3) is the joystick drivers used by *The Mouse*. The table of offsets called JOYTAB, is used by JOYSTK to call the right subroutine. Each polling subroutine updates the button up/down status flag (BUT DWN) and returns the Y-position (zero to 191) in the A register and the X-position (zero to 127) in the B register.

Next month we will look at *The Mouse* source code for the Hi-Res screen text driver in files four, five and six.

Editor's Note: Since this month's and next month's listings are intended for reference purposes, no addresses appear with the assembly language listings. The listings are available for downloading from the SOURCE FOR 6809 ASSEMBLERS topic area of the Delphi CoCo SIG database. □

Listing 1:

```
00100 *MOUSE/ASM   VERSION 2 0        LAST DATE 04/10/86
00200
00300 * THIS IS THE SOURCE CODE FOR MOUSE SOFTWARE ON A COLOR COMPUTER
00400 * COPYRIGHT 1986 BY SRB SOFTWARE  ALL RIGHTS RESERVED
00500 * THIS PROGRAM IS PLACED IN THE PUBLIC DOMAIN BY STEVE BJORK
00600 * FOR THE PRIVATE USE ONLY!
00700 * THIS CODE (ALL/PART) MAY NOT BE USED IN ANY MARKETED PRODUCT
00800 * WITHOUT WRITTEN CONSENT FROM SRB SOFTWARE
00900 *
01000 * THIS PROGRAM WILL PLACE A CURSOR ON THE SCREEN AND MOVE IT EVERY
01100 * 1/60 OF SEC
01200 * IS ALSO HAS A HI-RES SCREEN TEXT DRIVE.
01300
01400 SSTART  EQU     $8A     16 BIT POINTER TO START OF GRAPHIC SCREEN
01500 SEND    EQU     $87     16 BIT POINTER TO END OF GRAPHIC SCREEN
01600
01700
01800         ORG     0       START OF PROGRAM
01900
02000 BEGPRO  LBRA    USR     VECTOR FOR USR FUNCTION
02100 CURDAT  RMB     16*3*2*4+2      SPACE FOR CURSOR DATA
02200
02300 * THIS TABLE IS USED TO SELECT WHAT FUNCTION TO DO
02400 COMTAB  FDB     TURNOF-COMTAB           0  CURSOR OFF
02500         FDB     TURNON-COMTAB           1  CURSOR ON
02600         FDB     GETX-COMTAB             2  GET X POSITION
02700         FDB     GETY-COMTAB             3  GET Y POSITION
02800         FDB     GETBUT COMTAB           4  GET BUTTON PRESS
02900         FDB     GETDWN COMTAB           5  GET BUTTON STATUS
03000         FDB     DSABLE-COMTAB           6  DISABLE IRQ FROM SYSTEM
03100         FDB     PING COMTAB             7  BELL
03200         FDB     CLICK-COMTAB            8  CLICK SOUND
03300         FDB     SELJOY COMTAB           9  SELECT RIGHT JOYSTICK
03400         FDB     SELJOY COMTAB           10 SELECT LEFT JOYSTICK
03500         FDB     SELJOY-COMTAB           11 SELECT COCO MAX
03600         FDB     SELJOY-COMTAB           12 SELECT X-PAD
03700         FDB     SELJOY-COMTAB           13 SELECT HI-RES JOYSTICK
03800 LASTCH  EQU     (.-COMTAB)/2            NUMBER OF COMMANDS
03900
04000 * NEXT IS THE ALL THE VARIABLES NEEDED BY THE MOUSE SOFTWARE
04100 * VARIABLES ARE INDEXED OFF THE U REG FOR SPEED AND SMALLER SIZE
04200 DATA    EQU     +16             -16 TO +15 ARE THE FASTEST!
04300 COUNT   EQU     . DATA          MAKE ALL LABLES AS OFFSET TO U
04400         FCB     0               COUNT IS A COUNTER REG
04500 CSTAT   EQU     .-DATA          STATUS FLAG FOR CURSOR
04600         FCB     0
04700 YJOY    EQU     .-DATA          CURSOR Y POSITION
04800         FCB     0
04900 XJOY    EQU     .-DATA          CURSOR X POSITION
05000         FCB     0
05100 BUTDWN  EQU     .-DATA          BUTTON UP/DOWN
05200         FCB     0
05300 BUTTON  EQU     .-DATA          BUTTON BEEN PRESSED
05400         FCB     0
05500 BUTCNT  EQU     .-DATA          COUNTER FOR TEST BUTTON
05600         FCB     0
05700 STRIP   EQU     .-DATA          STRIP COUNT FOR DRAW CURSOR
05800         FCB     0
05900 MEMPOS  EQU      -DATA          SCREEN POSITION OF CURSOR
06000         FDB     0
06100 FAST    EQU      -DATA          FAST FLAG FOR DRAWING CURSOR
06200         FCB     0
06300 YCPOS   EQU     .-DATA          Y POSITION FOR PRINTING ON SCREEN
06400         FCB     0
06500 XCPOS   EQU     . DATA          XPOSITION FOR PRINTING ON SCREEN
06600         FCB     0
06700 PMODE   EQU      -DATA          WHAT PRINT MODE IS PROGRAM IN
06800         FCB     0
06900 INVERT  EQU      -DATA          FLAG FOR INVERTED TEXT
07000         FCB     0
07100 JOYTYP  EQU     . DATA          TYPE OF JOYSTICK INPUT (0 4)
07200         FCB     0
07300 HOLD    EQU     .-DATA          USE TO HOLD DRAWING CURSOR
07400         FCB     0
07500 OLDIRQ  EQU     .-DATA          PLACE TO PUT OLD IRQ VECTOR
07600         FDB     $FFFF
07700 OLDIO   EQU     .-DATA          PLACE TO PUT OLD OUTPUT VECTOR
07800         FDB     0
07900 NEWJOY  EQU     .-DATA          NEW X & Y FOR NEXT CURSOR POSITION
08000         FDB     0
08100 OLDCOM  EQU     . DATA
08200         FDB     0
08300 OLDPRT  EQU     . DATA
08400         FDB     0
08500 WDYPOS  EQU      -DATA          SCROLL WINDOW Y POSITION
08600         FCB     0
08700 WDXPOS  EQU     .-DATA          SCROLL WINDOW X POSITION
08800         FCB     0
08900 WDYLEN  EQU     .-DATA          SCROLL WINDOW Y SIZE
09000         FCB     24
09100 WDXLEN  EQU     .-DATA          SCROLL WINDOW X SIZE
09200         FCB     32
09300 FLIP    EQU     .-DATA          FLAG FOR HI-RES JOYSTICK
09400         FCB     0
09500
09600 CURBUF  RMB     16*3+2          BUFFER FOR DATA UNDER CURSOR
09700
09800 COMBUF  RMB     $35*2           TABLE USED FOR HOOKING PRINT @
09900
10000 USR     PSHS    X               SAVE VARIABLE POINTER
10100         LEAX    >IRQ,PCR        GET MOUSE'S IRQ VECTOR
10200         CMPX    $10D            IS SYSTEM VECTOR THE SAME?
10300         PULS    X               RESTORE VARIABLE POINTER
10400         BEQ     USR1            SKIP VECTOR ARE THE SAME
10500
10600         PSHS    X,Y,U,D         ELSE SAVE ALL REGS
10700         LDD     $10D            GET OLD IRQ VERTOR
10800         LEAU    DATA,PCR        POINT TO VARIABLE BLOCK
10900         STD     OLDIRQ,U        AND SAVE IT
11000         LBSR    JOYSTK          GET CURSOR X & Y POSITION
11100         STD     YJOY,U          SAVE SET IT
11200         LEAX    IRQ,PCR         GET NEW IRQ VECTOR
11300         STX     $10D            AND SET SYSTEM VECTOR WITH IT
11400         LDD     $168            GET OUT VECTOR
11500         STD     OLDIO,U         AND SAVE IT
11600         LEAX    SPRINT,PCR      GET NEW OUT VECTOR
```

rick to use the full range of the 5-bit offset (–16 to 15) is to set the U register .6 bytes in the variable list. The value of the first variable is now –16 (previously zero), still in the 5-bit range. But now 16 more bytes (and a few more variables) can use the faster 5-bit offset.

Let's see how the first file (Mouse 1 — Listing 1) breaks down. The first 13 lines are the standard comments and copyrights. SSTART and SEND are constants for BASIC's screen pointer variables in direct page. SSTART holds the starting address of Hi-Res screen memory and SEND holds the ending address plus one.

The first instruction is a long branch over the program variable tables, data buffers and command offset vectors to the USR handling code. The next 386 bytes is the shape data for the Hi-Res cursor. By loading data over this space, a new cursor shape can be displayed.

COMTAB is a table vector offset for the 13 user functions. Each 16-bit entry in the table is an offset (how far way) from the start of the table to the address of the function.

Next is the variable list used by the program. The Data label is set up 16 bytes into the list for maximum use of the 5-bit offset.

CURBUF is the buffer for saving what's on the screen before the cursor is placed. The cursor is removed by copying the old screen data from this buffer to the screen's memory. COMBUF is used as BASIC's command vector to intercept the '@' function in the PRINT command.

So much for the variables and buffers, now for code. First is the USR function and commands. The routine first checks to see if *The Mouse* is linked into BASIC's system. If needed, it hooks into the 60-hertz interrupt, output port and the PRINT command.

Down at the label USR1 (Line 13900) the program tests for a string variable and aborts if it is. After getting the function number, the program jumps to a subroutine based on it. When the program returns, the number is passed to BASIC and ends the USR function. The subroutines for USR functions two to four are in lines 15800 to 17100.

TURNON (Listing 2) is used to perform function 1, turn on the Hi-Res cursor. This subroutine sets the cursor-enable bit of the cursor-status flag byte and draws the cursor on the screen.

CURON is the code that does the drawing. After checking if it's OK to draw, it finds the screen's memory location for the cursor and determines if it should use the clip draw. A clip drawer only draws the part of the cursor that is on the screen. A clipper could be used even when it is not needed, but it is very slow, about seven times slower than the cursor draw without clipping. Because of this there are two types of

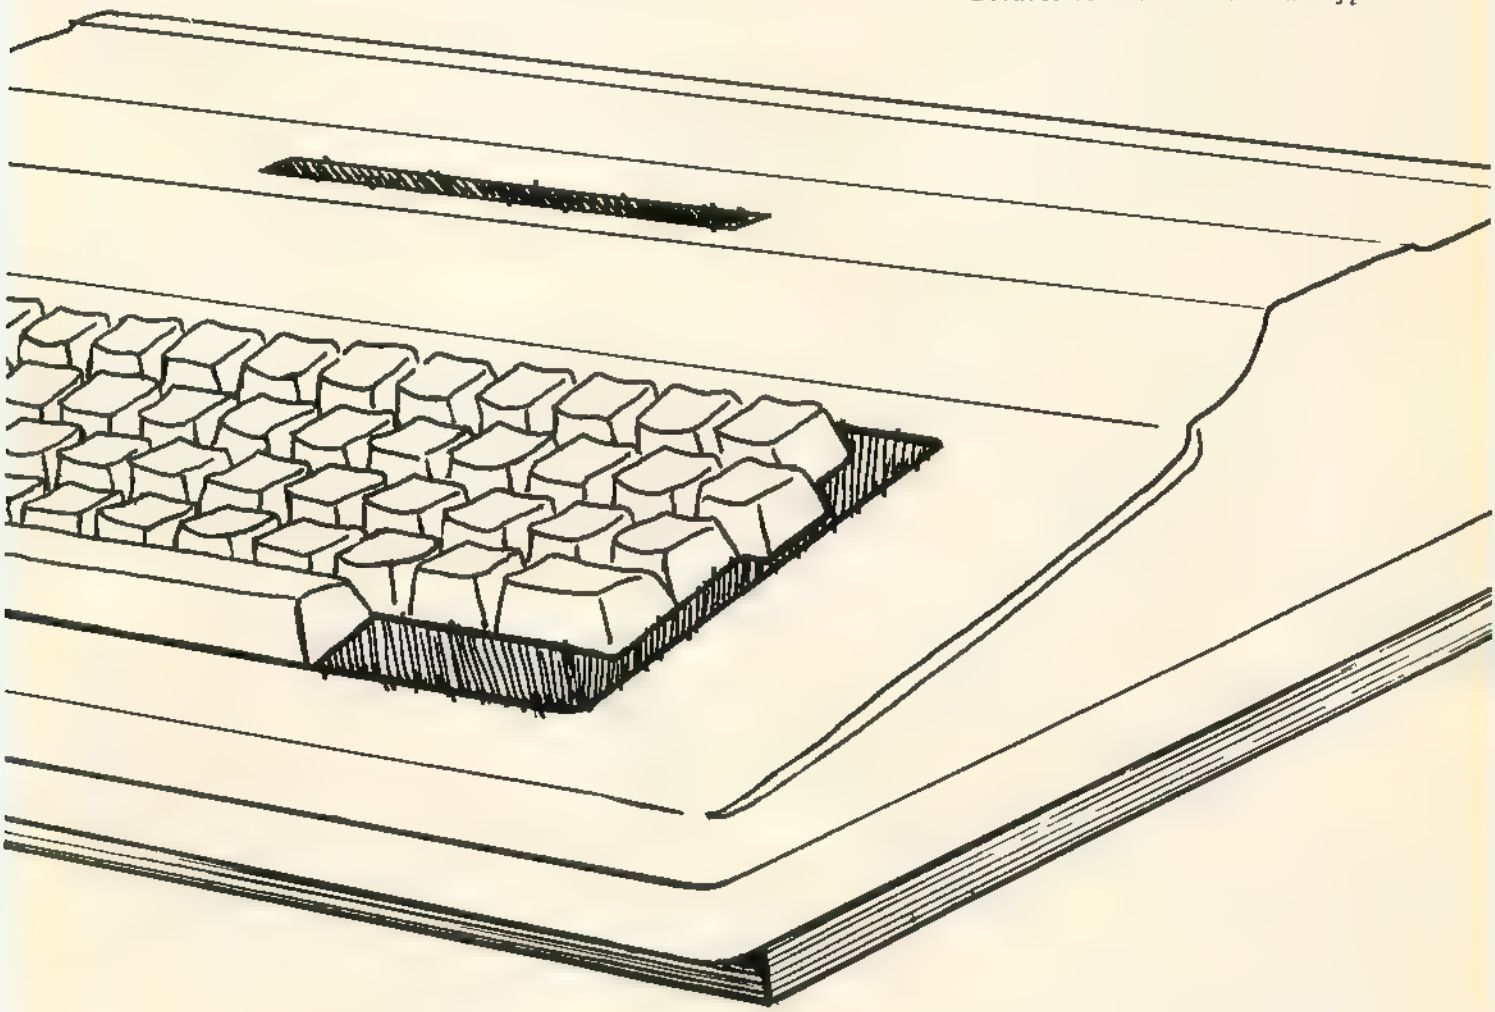

What's Inside a Mouse?

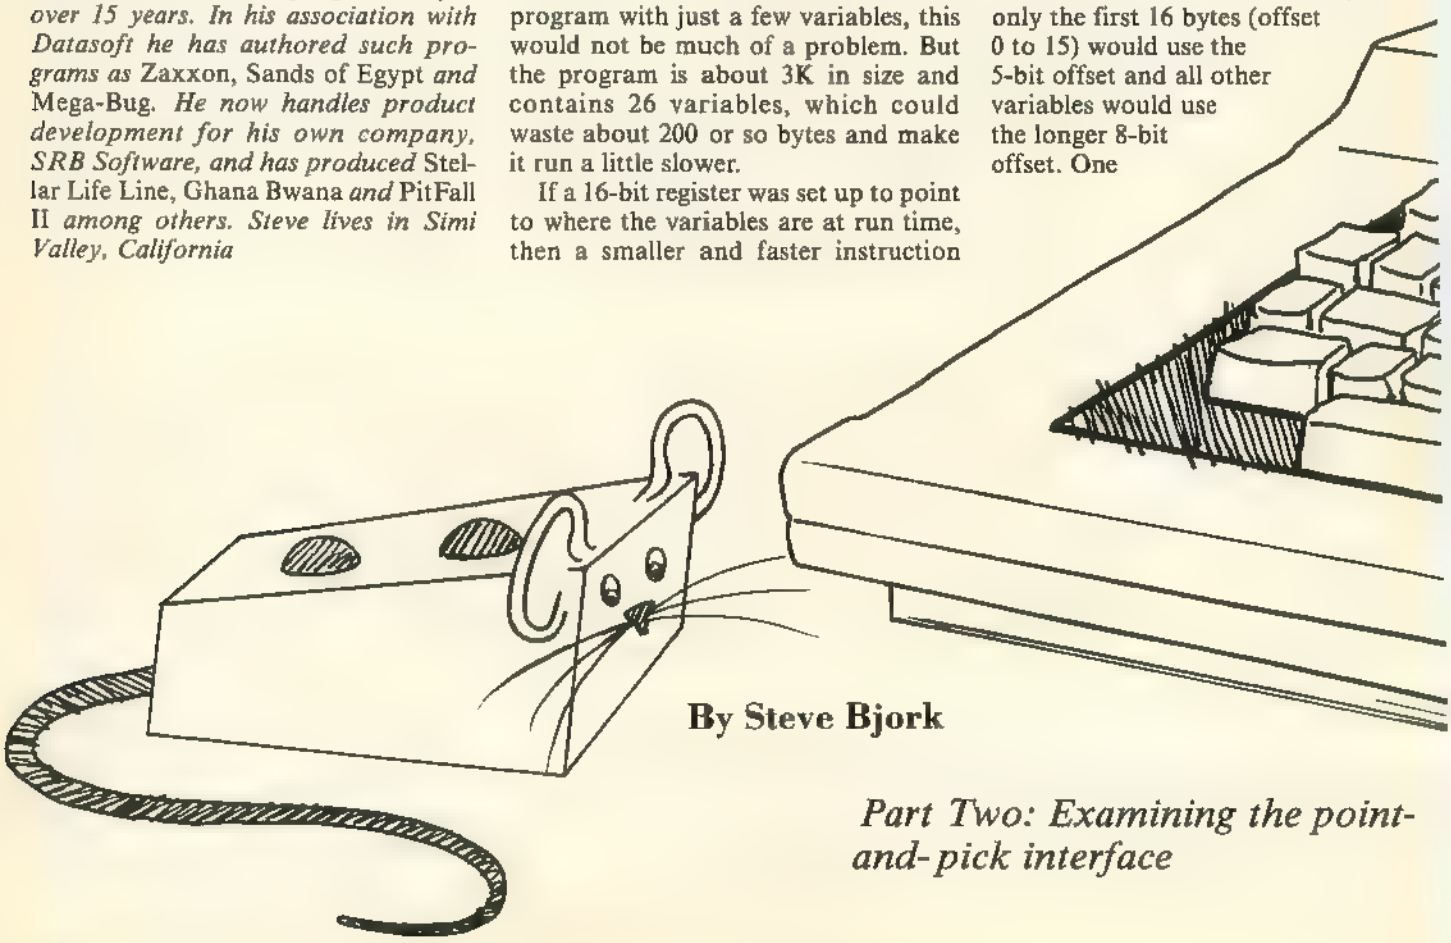

By Steve Bjork

Part Two: Examining the point-and-pick interface

To refresh your memory, *The Mouse* is an assembly language program that displays and moves a cursor and prints upper- and lowercase text on the Hi-Res graphics screen. A BASIC program may access this interface by 13 user functions and the PRINT command.

This month we are going to dive into the assembly language source code and see just how *The Mouse* does its magic. Because *The Mouse* is about 35K bytes long, it is broken down into six files. We will talk about three of them this month. We will see the assembly language side of the USR function and PRINT command along with the code for drawing the cursor (pointer). Also, we will look at how the joystick and button information is polled.

Steve Bjork has been a programmer for over 15 years. In his association with Datasoft he has authored such programs as Zaxxon, Sands of Egypt *and* Mega-Bug. *He now handles product development for his own company, SRB Software, and has produced* Stellar Life Line, Ghana Bwana *and* PitFall II *among others. Steve lives in Simi Valley, California*

Before getting started I should remind you that *The Mouse* and its source code are copyrighted (1986) by SRB Software with all rights reserved. It is presented in RAINBOW magazine for private use only and cannot be used (all or part) in any marketed product without written consent from SRB Software.

A Few Points about Relative Code

The Mouse is a code-relative program just like OS-9. The only difference is there is no direct page for the program (the direct page is already used by BASIC's system variables). The standard for address relative variables is LDA YJOY,PCR.

This instruction (when using a 16-bit offset) is about four bytes and nine clock cycles long, a little on the big and slow side. If *The Mouse* was a small program with just a few variables, this would not be much of a problem. But the program is about 3K in size and contains 26 variables, which could waste about 200 or so bytes and make it run a little slower.

If a 16-bit register was set up to point to where the variables are at run time, then a smaller and faster instruction could be used. In *The Mouse* the U register (User stack pointer, but no used by BASIC as such) is pointed to th variable block. The previous exampl could be changed to LDA YJOY,U.

True, it does not look that different but it is only about 2 bytes and 5 cloc cycles long (about half the time an size). In *The Mouse* two types of offset are used, 5-bit and 8-bit. The 5-bit offse has an advantage over the 8-bit by bein one byte shorter and one clock cycl faster. But there is one problem with th 5-bit offset, its limited range of -16 t +15 from where the pointer is address ing. Any offset out of this range mus use an 8-bit offset, which is longer an slower. For this reason the most used variables are placed at the start of the variable table.

If the U register was just a pointer to the start of the variables list, only the first 16 bytes (offset 0 to 15) would use the 5-bit offset and all other variables would use the longer 8-bit offset. One

f you don't need graphics, type PCLEAR1. On a tape-based system you can type POKE 5,6:NEW

Unless Brother has changed its design, hat 12-pin connector is not a standard serial ort. You must send the signal from it to an dditional optional $150 device sold by Brother, called the Brother IF 50 Interface. The IF 50 Interface plugs into the typewriter t one end with the required 12-pin plug, and t the other end provides a buffered (2K size) erial and parallel port (you select one by a witch on the IF 50).

On the DB-25 plug, which you will plug nto the IF 50 Interface, you must short pins 4, 6 and 8. Then, hook up that plug via a hree-wire cable to the standard CoCo four-pin DIN connector in the following manner: Pin 3 of the CoCo DIN goes to Pin 7 of the DB-25 which will plug into the IF 50, Pin 4 of the CoCo DIN goes to Pin 3 of the DB-25 plug, and Pin 2 of the CoCo DIN goes to Pin 20 of the DB-25 connector. You will also have to properly set the Baud rate and word length, etc., on the IF 50 and the CoCo.

• *I noticed a peculiarity when writing a space game in BASIC's* PMODE 4. *The blue ship I drew might be red the next time I turn on the computer or press the Reset button. Why is this? Is there any way to predict what color it will be?*

Jason France
Yuba City, CA

You have discovered the "artifact color flip" peculiarity of the CoCo. The Video Display Generator (VDG) chip initializes itself to either the rising or the falling edge of the video clock at any power up or reset cycle in a manner that is both random and can neither be detected nor affected by software. This determines whether your ship will be red or blue (and whether the background will be blue or red!). There is no way to predict or control which set you will get unless you make some very sophisticated hardware modifications.

• *When running artifact color programs like* Black Sanctum *and* Pitstop II, *my CoCo 2 presents a red and green artifact color set, not the red and blue set the game's instructions say I should have. Is something wrong with my computer?*

Todd A. Black
Merced, CA

Before I can tell if something is wrong with your computer, I'd need to know if you are using a TV or a monitor. Have you tried adjusting the tint control on your TV or monitor? You might be able to adjust it to become red-blue using the tint control. If not, you may have a problem in your TV, monitor, computer or, most likely if you are using one, your color video monitor driver circuit

---

• *My Extended BASIC 64K 'F' board computer loses all color when I press Reset. Replacing the VDG chip did not help. I damaged the "flying circuit" in the plastic tube while I was working on my computer. The colors I do get are now strange. This circuit is not shown in the schematic I have. Do you know the values of the components?*

Edwin J. Mullican
Gulfport, MS

The CoCo I 'F' Board is a particularly odd case, because Tandy went into production with a board that in most cases simply failed to produce artifact colors. They had to add a fix after production of the board; that is the thing you referred to as the "flying circuit."

The flying circuit consists of a 33K ohm resistor, a 27-micro henry inductor (choke) and a 75-pico farad capacitor all hooked in series, with one end connected to Pin 33 of the VDG (the video clock line) and the other connected to the composite video input to the Aztec RF Modulator. This point can also be found on the circuit board as the junction of R45 (470 ohms) and R45 (1 5K ohms). The video clock signal can also be picked up at one end of R37 (10K ohms).

Note that early models of the CoCo I 'F' board had a different sort of fix: Tandy merely soldered a 56K ohm resistor between Pin 2 and Pin 12 of the 1372 chip (U6). You might want to experiment with using resistors between 33K and 56K between pins 2 and 12 of the 1372 chip. In your testing, be sure to solder the resistor directly to the chip. The test won't be valid if you use any kind of jumper clip cables.

• *I am interested in a quality printer that is both fast and does not produce "dotty-looking" characters. In general, I have not seen print quality that I like from less than a 24-wire print head. What do you recommend? I do not want to get involved in interfaces or DIP switch settings or changes in wiring.*

Dorothy Dow
Jacksonville, FL

Brands to look for are Toshiba and Fujitsu, both of which, in my opinion, make better high-end 24-wire print head printers. Some of the slower Toshibas are offered for under $600

There is no way to avoid having to set DIP switches on printers no matter what printer or computer you own. Under Disk BASIC, essentially all features of any printer except proportional spacing can be accessed using *Telewriter* or *VIP Writer*. Under OS-9, *Stylograph* allows use of proportional spacing options.

• *I own a Zenith 123A monochrome monitor and a Mark Data Products video driver. Both work well on my CoCo. The Zenith is rated at 640 by 200 dots resolution, or 15 MHz band width. I see other monitors comparably priced rated at 700 by 200 dots and 20 MHz. What is the best resolution the CoCo can handle? What do add-ons like the* Word-Pak RS *and the DISTO 80-column card do for the CoCo's resolution?*

Bill Condie
Freehold, NJ

All monochrome monitors have adequate resolution to display the CoCo's Hi-Res image of 256 by 192 pixels. Indeed, specifications such as dot resolution and megahertz band width are not good indicators in determining if one composite monitor is better than another. You simply must compare monitors with your own eyes.

Both the *Word-Pak RS* and the DISTO 80-column card have separate video signal creation hardware that produces a higher resolution video signal for display of text (only) in an 80-column by 25-line format. The DISTO card has the advantage of supporting underline and boldface display, and the *Word-Pak RS* has the advantage of allowing a hacker to tinker with both its character set and its display parameters to match it to odd-ball monitors. Both draw their characters in a roughly 5 by 7 matrix on a 640 by 200 pixel resolution screen. Compare this with the 256 by 192 pixel matrix that is the maximum a normal CoCo can display.

Your technical questions are welcomed. Please address them to CoCo Consultations, THE RAINBOW, P.O. Box 385, Prospect, KY 40059.

We reserve the right to publish only questions of general interest and to edit for brevity and clarity. Due to the large volume of mail we receive, we are unable to answer letters individually.

For quicker response time, your questions may also be posted in the FORUM section of RAINBOW's CoCo SIG on Delphi. In FORUM, type ADD and address your questions to the username MARTYGOODMAN. Marty is on most every evening to respond to FORUM messages, and other CoCo SIG members may also reply to questions posted in this public message area. Please be sure to leave your name and address in any FORUM questions, since those of wide interest will be selected for publication in this column.

Introducing a new Rainbow column . . .

Remedies from the CoCo Clinic

By Marty Goodma

• *I would like to upgrade my old (gray) CoCo to display lowercase characters and would like to know what type of VDG is used. Is it a new standard IC, and if so, what is the type number, or is it a custom MC-6847 specially made for Tandy?*

J.P Schreur
the Netherlands

I suggest you purchase one of the lower kit adaptors commercially available. These are boards that utilize the ability of the old 6847 to derive its character set from an external character generator EPROM. One is made by Green Mountain Micro of Roxbury, Vermont. It offers the advantage that you can reprogram the character generator EPROM with your own character set of choice.

• *I need to purchase a color monitor. While referencing ads in RAINBOW I see that some monitors do not have a Hi-Res dot-matrix of 255 by 192 dots. How could this affect the CoCo display if the monitor matrix is 300 by 300 dots, or 200 by 200 dots? Also, is there another VDG available for my CoCo that would change the Hi-Res dot-matrix from 255 by 192?*

Charles Stierhoff
Dallas, TX

Essentially, any make or model of composite color monitor will work fine on the CoCo. The ads that claim a given dot resolution merely refer to the maximum possible resolution the monitor can display. Thus, a monitor rated at 300 by 300 will nicely display the 256 by 192 CoCo Hi-Res screen. I do not believe there is a color monitor with resolution below 256 by 192.

• *I purchased a 16K standard BASIC CoCo 2 and upgraded it to 64K ECB myself. I [later] purchased a second CoCo 2 16K and when I went to upgrade it to 64K ECB I found the PC board had changed. The PC board we have is Revision F. When I talked with the Radio Shack Computer Center they told me this board is [difficult] and costly to upgrade — the price is $120. You can purchase a CoCo 2 64K ECB for about $150. The price to perform the upgrade does not make economic sense. Is there a solution?*

John Huth
SCS, MI

It would have helped if you had given the catalog number of the CoCo 2 you want to upgrade, but it sounds like an A or B model (number 26-3134A or 26-3134B). Inside this model are two (not eight) socketed RAM chips, usually flanked by two white single inline female connectors. Each of these chips (numbered 4416) has a total of 18 pins, not 16 like the RAM chips in older CoCos. They are found more or less in the center of the circuit board

If your CoCo meets this descriptio upgrading to 64K is both cheap and simpl First, purchase two 4464 RAM chips. (The are available from Microprocessors Unlin ited of Beggs, Oklahoma, phone 918-26 4961, for roughly $4.50 per chip.) Remov the two old 4416 chips and replace them wit the 4464 chips. Look to the left and the fro (toward the keyboard) from the area wit the two RAM chips; you will spot tw jumper solder pads enclosed in a whit rectangular-like screen box drawn on th circuit board, labeled either J4 or 64K c both. Just connect those two points togethe (using a short piece of wire and a low-powe soldering iron) and your upgrade is com plete.

• *When I turn on my Color Computer an ask for the amount of available memory, returns about 22K (I have a 64K computer, What instruction do I give to obtain th most amount of memory?*

My typewriter is a Brother Compactron 60 and is computer-interfaceable. I hav contacted the manufacturer and they indi cate that it is fully compatible with the Colo Computer. Unfortunately, its serial port ha 12 pins. Do you know where I can get a 12 pin male plug?

Anthony Depalm
Plainfield, N.

The BASIC operating system of the CoCo was only designed to use 32K of RAM To use all 64K you need to write or buy appro priate machine language programs, or use OS-9. Expanding available memory for use with Disk BASIC is virtually impossible because of the machine setup and the way BASIC was written in the ROMs However to get the most memory on a disk system,

---

Martin H. Goodman, M.D., a physician trained in anesthesiology, is a longtime electronics tinkerer and outspoken commentator — sort of the Howard Cosell of the CoCo world. Marty is the database manager of RAINBOW's CoCo SIG on Delphi. His noncomputer passions include running, mountaineering and outdoor photography. Marty lives in San Pablo, California.

Protect Your Valuable Magazine Collection With . . .

DISTINCTIVE, DURABLE RAINBOW BINDERS

For greater convenience, order RAINBOW Binders through the shopping area of the CoCo SIG on Delphi

Each issue of THE RAINBOW is a vital resource that you will refer to again and again, to gain insights, to explore new areas of interest or simply to refresh your memory. So, you need to keep your copies of THE RAINBOW safe — in high-quality, vinyl binders that provide complete protection.

These distinctive red binders not only ensure that your RAINBOWs stay in mint condition, but they showcase your collection as well. Each binder is clearly embossed with the magazine's name in gold lettering on both the front and the spine. They're a handsome addition to any room.

They also make it possible for you to organize your work space and eliminate the clutter on a permanent basis. You'll spend more time on your CoCo and eliminate those frustrating searches for misplaced magazines.

A set of two handsome binders, which hold a full 12 issues of THE RAINBOW, is only $13.50 (please add $2.50 for shipping and handling).

Special Discounts On Past Issues With This Offer

To help you complete your collection of THE RAINBOW, we're offering a special discount on past issues with the purchase of one or more sets of binders.

When you place an order for six or more back issues of THE RAINBOW at the same time you order your binders, you are entitled to $1 off each magazine, which normally sells for the single issue cover price. For an order form, please refer to our "Back Issue Information" page (check Table of Contents under departmental listings). Also with this offer, copies of the "Official And Compleat Index To THE RAINBOW" (a comprehensive index of RAINBOW's first three years, July 1981 through June 1984), usually priced at $2.50, may be purchased for only $1 with a set of binders.

Due to heavy demand, we suggest you order back issues now while supplies last.

_____ **YES**. Please send me _____ set(s) of RAINBOW binders at $13.50 per two-binder set (plus $2.50 per set for shipping and handling). If your order is to be sent via U.S. Mail to a post office box or to another country, please add $2. Kentucky residents add 5% sales tax. **U.S. currency *only*, please.**

Order one or more sets of binders and take advantage of these exciting offers:

_____ I also want to take advantage of a special savings of $1 off the single issue cover price for back issues with the purchase of a set of binders. (Minimum order of 6 magazines. An order form from a recent issue indicating the back issues you wish to receive should accompany this order.)

_____ I want to purchase the first three-year index to THE RAINBOW (July 1981 through June 1984) at the special price of $1 (regular price $2.50) with my purchase of one or more sets of binders.

Name _____
Address _____
City _____ State _____ ZIP _____
☐ My check in the amount of _____ is enclosed. (In order to hold down costs, we do not bill.)

Charge to: ☐ VISA ☐ MasterCard ☐ American Express

Account Number _____ Expiration Date _____
Signature _____

Mail to. **Rainbow Binders, The Falsoft Building, Prospect, KY 40059.**

To order by phone (*credit card orders only*) call 800-847-0309, 8 a.m. to 5 p.m. EST.
For other inquiries call 502-228-4492.

chived polls, go to the Topics section of the SIG. Jim archives older polls to allow users to create even more polls. Only 20 polls can be active at any given time. To vote on an active poll, type POLL from the CoCo SIG prompt.

Jim has also been quite busy answering Mail and Forum messages, as well as weeding out older Forum messages that no longer have any information value. It appears we have found a quick way to correspond with other CoCo enthusiasts. For the newcomers to the CoCo SIG, we ask that certain guidelines be followed in sending messages. Questions and suggestions involving normal SIG operation should be sent to Jim Reed or me. This can be in either the Forum or via Mail, although we would like to see them in the Forum to keep them public. Questions about the database should be referred to **Marty Goodman** (MARTYGOODMAN) or **Steve Bjork** (6809ER). Any questions about the production of the RAINBOW should be sent to EDITORS and those concerning subscriptions should be sent to ORDERS. Any messages sent to EDITORS or ORDERS should be sent via the Mail section only, since they are not of general interest.

Free SIG Time!

We are pleased to announce the opening of a new section on our CoCo SIG. The section is titled Questions & Feedback and is accessible from the main CoCo SIG menu. Selections offered in this new section include Feedback to Sig Staff, Order RAINBOWfest Tickets, Request for Free Upload Time and Trouble Report.

The intent of the new section is to provide a quick method of obtaining help or services. To use this new feature just type QUE at the main CoCo SIG prompt. You will be presented with the menu of choices. Type the first three characters of the appropriate choice and then type READ. You will then be allowed to fill out a "form" that is simpler than typing your name. Just follow the prompts.

To Jim Reed goes a big chunk from that pot-o'-gold for all his perseverance (and late nights) working on getting this much-welcomed addition in operation!

Next Month

Next time I hope to continue our discussion of the database. Emphasis will be placed on uploading of files to our CoCo SIG.

ics world. Paul Normand has given us a curious *CHAIR-R-Us* program, and **Roger Bouchard** (HARBIE) has uploaded some striking animal images: in particular, a wildcat picture worth downloading and examining.

Ira Goldwyn (IRAG) recently arrived on the SIG with an immense number of graphics images. Most of these are cartoons or enhanced digitized pictures. His *Famous Faces* group includes W.C. Fields, Groucho Marx, Mr. Spock and (my favorite) Alfred E. Neuman. His *Looney Tunes* group includes Speedy, Tweety, Coyote, Elmer, Daffy and others of our friends. His cross-eyed *Mona Lisa* is an amusing bit of digitizer vandalism. I expect we'll be seeing more of Ira's material over the next few months.

In the Product News section I have uploaded a 15K piece that describes nearly all I know [Editor's exclamation!] about 80-column cards for the CoCo. This is an exhaustive comparative review of all four 80-column cards made for the CoCo, with material for the novice and dedicated hardware hacker alike. This review has already been more popular in terms of download count in its first two weeks of existence than most other reviews that have been there for months I also have uploaded a comprehensive review of the new Tandy Modem Pak for the CoCo.

In the OS-9 database **Kent Florian** (DALEK) has given us the *Dolphin Editor*, a screen editor written in C. **Denny Skala** (DENNYSKALA) has provided a patch for function keys for Version 1.0 and Version 2.0. He has also given us an OS-9 driver for the J&R Banker 256, 512K RAM upgrade. **Allan H. Smith** (LUTHER) has given us a driver for the Tandy Speech Sound Pak. (There are versions of this driver for both OS-9 Version 1.0 and Version 2.0.)

We have a number of new games. Paul Normand has provided us with three new entries: *Egyptian, Birdcreatures* and *Dicegame*. The first two are "U-Zap-Em" sorts of games. Steve Macri has given us *Drag.BAS*, a drag race game. Finally, one of the authors of *Graphicom* and *WEFAX* decided to doodle with his FORTH system, and, as a little exercise, whipped out a simple version of that classic computer game *Lunar Lander*. This is in compiled FORTH (it is downloaded and executed like any other binary program) and features very smooth graphics. A word of caution: This file is 27K long!

In the Music topic area, **Ken Bragg** (KILRCOCO) has submitted the first new music file we have seen in ages! The submission, *Open Arms*, is a darn good one.

The CoCo SIG staff heartily thanks all members for their contributions to the database.

A Look Back and a Look Forward

Our database has been steadily growing. The largest growth has been in the Graphics section, with the Utilities section close behind. Ira Goldwyn, a long-term CoCo BBS user, has amassed an immense library of Color Computer art, consisting of original art, cartoons and digitized pictures. He has contributed heavily to our Graphics database. Ira says he has over 2,000 CoCo art files in his library. I expect we'll be seeing quite a bit more from him. Soon, we expect to have the RAINBOW's "CoCo Gallery" pictures in the Graphics section, available to members without surcharge.

The labors of our new OS-9 section leader, Steve Bjork, are beginning to be felt in the OS-9 database. OS-9 files are now promptly enabled. Steve has worked closely with some of the more recent contributors to improve their files. Arrangements are now in progress for software from the OS-9 users group to start appearing in our OS-9 library. And the "KISSable OS-9" program files from RAINBOW will soon be available in the OS-9 Data Library section, though accessing those "KISSable OS-9" files will incur a $3.50 surcharge, as is the case with regular RAINBOW ON TAPE material. Members will be alerted to this by a dollar sign ($) in the filename.

Soon, I hope to find time to upload all of the *WEFAX* program material I have in my personal library, including a dozen or more graphics files of the documentation for *WEFAX*, hand-drawn by the authors of *WEFAX* and *Graphicom*. Coming from these same folks will be an RTTY program to allow amateur radio operators to receive and transmit RTTY signals using the CoCo, and a Morse Code practice program that incorporates all of the latest ideas about how to properly learn the code and improve speed. **Don Hutchison** (DONHUTCHISON) will soon be uploading some useful schematics and associated documentation for simple, rugged disk drive power supplies to the Hardware Hacking section. He and I have been working on these for the last few weeks, collaborating via Delphi Mail. I may also have time to upload some more font sets for *Graphicom*. I plan to write some new product reviews, including a comparison of all available 256K RAM disk upgrades for the CoCo, and a comprehensive product review of the new DS 69A video digitizer from Microworks, which is a most impressive product.

— Marty
(MARTYGOODMAN)
Delphi CoCo SIG Database Manager

Once you are in the file room and in ont of the appropriate file cabinet, irt opening the drawers to see what's ere. Just type DIR to get a directory the various groups. Make sure to jot wn any items you may want to download. When the directory has finished se CONTROL-'O' to abort the output), pe READ XXXX where "XXXX" is the me of the group of files you want to e. You *must* READ a group before you n download it.

What you should see now is a slew of formation about the group, such as e size, who submitted the files, what e files do and a list of the files in that oup. The last thing to appear on the reen is the ACTION> prompt. This is elphi's way of saying you can download or list the file now. If you press NTER at this prompt, the information bout the next group in the directory is nt to your screen.

eady to Download

To initiate an XMODEM download, pe XM. You are prompted with:

```
ype three consecutive <Control-
>'s to abort.
K, receive! (text)
```

In this case, the file is an ASCII file s indicated by "text" in the above xample. If the file is binary, "text" is eplaced by "blocked." At this point nitiate XMODEM receive on your erminal program. On *Mikeyterm*, this s done by using CONTROL-'4'.

The file should begin transfer into our computer. When transfer is comlete, your terminal program prompts ou. Save the file to tape or disk. It is vise to look at the contents of the buffer irst. If you can read each character in he buffer, the file should be saved as an ASCII file. If, however, the buffer contains what appears to be graphics characters and other "garbage," the file s in binary (not necessarily machine-anguage) and should be saved accordngly.

To initiate an ASCII download, type DOW at the ACTION> prompt. Delphi esponds with:

```
Ready... Press RETURN to begin:
```

At this point, open the buffer on your communications software and press RETURN. As the file is transferred, you will see its contents scroll down the screen. Since binary files cannot be transferred in this manner, remember to save the file to tape or disk in ASCII.

Final Notes on Downloading

That's all there is to it! Once the file is saved, simply return to the communications mode and continue having fun. If the group from which you downloaded contains more than one file, you will probably want to get others, too. When you return to communications, Delphi will still be just "sitting" there. If you press ENTER, Delphi responds by starting a transfer of the next file in the group. If the group only contained one file, when you press ENTER, Delphi responds by sending the information for the next directory group to the screen. This is handy for downloading several consecutive files and groups.

If there is more than one file in a particular group, you don't have to download them all. If you only want to download the third file listed in the group, for example, just type XM 3 or DOW 3 accordingly at the ACTION> prompt.

To return to the database prompt for the database you are in, use CONTROL-'Z'. To change to a different topic area, type SET XXX where "XXX" is the first three letters of the database area you want.

If you have further questions, please direct them to Marty Goodman or me in Forum so that others may learn as well.

On Other Items

CoCo SIG Manager Jim Reed is busy archiving older polls. To see the ar-

Database Report

By Marty Goodman

In May, I uploaded a file to the General topic area describing the tragic loss of a GOES weather satellite because of a malfunction in its Delta booster rocket. Also present is a file on how to use DOT commands in messages to make them appear on the forum nicely formatted.

Steve Bjork (6809ER) has contributed a random number generator in assembly language source code to our Source For 6809 Assemblers topic area. Steve, one of the best known CoCo games programmers has, over the last year, been producing a lot of code he has been placing in the public domain. His excellent *Mouse* utilities have been appearing in the pages of RAINBOW over the last couple of months. I have uploaded to the Source For 6809 Assemblers area the source code file for the *MS19SET* format program that allows a CoCo to format MS-DOS type disks. This code is highly commented, and while written to create a single-sided MS-DOS disk, can easily be modified to generate double-sided MS-DOS format. **Art Flexser** (ARTFLEXSER), author of *ADOS* and *Peeper*, has continued to upload more of his tutorials to the Source code section. Among them is a tutorial on how to program the PIAs of the CoCo to read the keyboard and an introduction to ML sorting.

Our Utilities section has been expanding with new files from many members **Mark Kowit** (TOBOR8) has uploaded *Real Estate Management and Evaluation* programs. **Jim Manning** (JIMBM) has uploaded a *Homebudget* program, and **Bill Lippert** (BEERBELLY) has given us a delete disk file utility. **Milton Webb** (MILTWEBB) contributed a disk utility program, and **Paul Normand** (PAULNORMAND) has provided a program for cataloging video tapes (*BETA.BAS*). **Chris Bergerson** (CHRISB) donated a *Disk Label Maker* utility.

In the Hardware Hacking topic area Steve Bjork has uploaded a utility for checking out the memory in a DISTO RAM Disk card. I've uploaded an article on how to upgrade all models of CoCo 2, and one discussing the use (and abuse) of high speed pokes on the CoCo. I also have uploaded a technical file for owners of the J&R Banker on how to fix the hardware so you'll never have to disable the unit to run any CoCo program. This hardware fix cures the unit's problem of not working with programs that talk to the SAM using CLR instructions. Finally, I have uploaded some alternate fonts for burning into 2716-1 EPROMs to improve the appearance of the character set of the PBJ *Wordpak-RS*. Included are utilities to create your own fonts.

In the Graphics database, there is a staggering number of new and lovely uploads **Stephan Macri** (DRACMAN) has given us a utility to convert the output of the C64 Doodle converter into *CoCo Max* file format. Mark Kowitt has provided us with a beautiful enhanced digitized image from the movie *The Color Purple*: a striking silhouette of Celie. Mark has also given us a whole group of digitized faces entitled *Strange Faces*, which further establishes digitized images as a true art form. **Keith W. Smith** (UGLY) has provided us with a poster showing some of *Murphy's Laws*, and **Loren J. Howell** (XENOS) has given us a CGP-115 dump program. Loren has also uploaded two pictures of butterflies, one of a Monarch and one of a Cyrus Morphus. I am impressed with the detail and accuracy of these images, and with their sheer beauty. Loren appears to be a budding Audubon of the CoCo graph-

Using the CoCo SIG

By Cray Augsbur
Rainbow's CoCo SIGo
User Name: RAINBOWMA

Let's take a trek into the workings of the database on the CoCo SIG, and while we're on this voyage, we'll look in detail at how to download and upload files while on Delphi. However, we first need to become more familiar with the fundamentals.

File Formats

A file is a group of related characters and symbols. Generally the term "file" refers to a program, an article or a set of data. There are two different formats for the storage of information in files: ASCII and binary. Binary files are sometimes referred to as compressed or tokenized. An ASCII file contains readable characters, while a binary file contains characters that represent the zeroes and ones the computer works with.

ASCII is the preferred format for text files or articles. It is sometimes best to store BASIC programs in the ASCII format. Incidentally, we request all BASIC files for uploading be stored in ASCII. Binary is used for the storage of tokenized BASIC files, machine language programs, graphics and music files. Infrequently, text files are stored in binary format.

File Transfers

There are two distinct methods of uploading and downloading files. These are the ASCII transfer method and XMODEM transfer. While the ASCII transfer can only be used to transfer ASCII files, XMODEM can be used to transfer both ASCII and binary files.

Cray Augsburg is RAINBOW's technical assistant and has an associate's degree in electrical engineering. He and his wife, Ruth Ann, have two children and live in Louisville, Kentucky. His username on Delphi is RAINBOWMAG.

ASCII transfer is simply the transmission or reception of a character-by-character image of a file. Since the ASCII code uses only the lowest-order seven bits of each byte, control codes and other special information (binary code) cannot be transmitted in this way. ASCII transfer involves no automatic error detection, so it is frequently unreliable for the transfer of information.

The XMODEM protocol transfers complete bytes and, therefore, allows the transfer of binary information and control codes. When a file is being transferred via XMODEM from a host computer to a remote computer, the information is sent in groups (blocks) of 128 bytes rather than a continuous stream. This allows for error detection in the transfer.

Once a block is transferred, the host computes a checksum value based on the information contained in the block. The remote computer also does this, and sends the value back to the host. The host compares the computed values and, if they are the same, transfers the next block in the file. If the values do not match, the host knows the sent block was not correct and resends the block. Most XMODEM terminal programs allow the host to send a correct block up to 10 times, if necessary. This allows for the transfer of error-free ASCII or binary files. It is for these reasons we suggest you use a terminal program that includes XMODEM capability. If you do not have access to one, you can download *Mikeyterm* from the data communications database via ASCII transfer. *Mikeyterm* is an easy-to-use XMODEM terminal program that supports several system configurations including tape-based systems.

Database Organization

The CoCo SIG database can be viewed as a room full of file cabine There are 16 file cabinets; one for ea topic area of the database. Each cabir contains several drawers (we call the groups on Delphi.) Each drawer c have one or more folders (files, programs) in it.

Type DAT to get the database for t CoCo SIG. You will see a TOPIC prompt; enter the name of the topic ar you want to peruse (see Table 1.) R member, Delphi allows you to enter t first few unique characters in place the entire name. A shorter method is include the topic name on the commar line with DAT. For instance, at the CoC SIG prompt type DAT GAM to enter tl games database.

Table 1

Topic Areas of the CoCo SIG Database

1) General Information
2) Info on RAINBOW
3) BASIC Programming
4) OS-9
5) Source For 6809 Assemblers
6) Help
7) Utilities & Applications
8) Product Reviews & Announcements
9) Hardware Hacking
10) RAINBOW ON TAPE
11) Games
12) Data Communications
13) Graphics
14) Managers Only*
15) Music & Sound
16) Preview*

* These areas are accessible only by SIG staff. Managers Only is used for the storage of suggestions by the staff. Preview is the area where new submissions wait before they are moved into the public areas.

```
59Ø IFX$="@"THEN77Ø
595 X=ASC(X$)-64:IFX<1 OR X>PC T
HEN585
6ØØ IFK(X)=1THEN615
6Ø5 PRINT:PRINT" SORRY, BUT IT I
S";Z$;:NW=NW+1
61Ø GOTO62Ø
615 PRINT:PRINT" YES! THE ANSWER
 IS"Z$;:NC=NC+1
62Ø NT=NT+1:IF NT<1ØTHEN63Ø
625 GOSUB785:NT=1
63Ø X$=INKEY$:IFX$=""THEN63Ø
635 IFX$="@"THEN77Ø
64Ø IFX$=CHR$(13)THEN37Ø
645 GOTO63Ø
65Ø CLS:PRINT:PRINT" HOW WOULD Y
OU WRITE OUT THE     FOLLOWING D
IGIT ?"
655 PRINT:PRINT"     => ";Z$
66Ø TM$=R$:TX=RND(2):IFTX=2THEN6
7Ø
665 D$(1)="A) "+R$:D$(2)="B) "+A
L$:AN$="A":GOTO675
67Ø D$(2)="B) "+R$:D$(1)="A) "+A
L$:AN$="B"
675 GOSUB68Ø:GOTO725
68Ø PRINT:FORY=1TO2:R$=D$(Y)
685 T=LEN(R$):IF T<=3ØTHEN71Ø
69Ø FORI=3ØTOØSTEP-1:IFMID$(R$,I
,1)=" "THEN7Ø5
695 IFMID$(R$,I,1)="-"THEN7Ø5
7ØØ NEXTI:GOTO71Ø
7Ø5 L$=" "+LEFT$(R$,I):R$=RIGHT$
(R$,T-I):PRINTL$:GOTO685
71Ø PRINT" "R$
715 IFY=2THENRETURN
72Ø PRINT:NEXTY
725 X$=INKEY$:IFX$="A"THEN745
73Ø IFX$="B"THEN745
735 IFX$="@"THEN77Ø
74Ø GOTO725
745 PRINT@16Ø,"";:FORI=1TO32Ø:PR
INT" ";:NEXT:PRINT@192,"";
75Ø IFX$=AN$THENPRINT" CORRECT!
THE ANSWER IS:":NC=NC+1
755 IFX$<>AN$THENPRINT" SORRY! T
HE ANSWER IS:":NW=NW+1
76Ø D$(1)=TM$:D$(2)="":GOSUB68Ø
765 GOTO62Ø
77Ø CLS:PRINT@1Ø1,"YOU TRIED"NC+
NW"PROBLEMS &":PRINT@165,"ANSWER
ED"NC"CORRECTLY"
775 PRINT@229,"WHILE DOING"NW"WR
ONG."
78Ø GOSUB785:GOTO825
785 NQ=NC+NW:IF NQ=ØTHEN NQ=1
79Ø MS=INT(NC/NQ*1ØØ)
795 IF MS<7Ø THEN RR=RR-1
8ØØ IF RR<Ø THEN RR=1
8Ø5 IF MS>95 THEN RR=RR+1
81Ø IF RR>5 THEN RR=5
815 ON RR GOSUB155,16Ø,165,17Ø,1
75
82Ø RETURN
825 PRINT@293,"YOUR SCORE IS"MS"
%."
83Ø PRINT@357,"ANOTHER TRY (Y/N/
C) ?";
835 X$=INKEY$:IFX$="Y"THEN RUN
84Ø IFX$="N"THENCLS:END
845 IFX$="C"THEN37Ø
85Ø GOTO835
```


PRINTERS!!!

NEW! Star Micronics NX-10	$295
Okidata 192 (Parallel)	$370
Okidata 192 (Serial)	$425
Okidata 182	$240
Silver Reed 550 (Daisy Wheel)	$395
Silver Reed 400 (Daisy Wheel)(Parallel or Serial)	$200

Other Printers, Monitors and Accessories for CoCo and IBM upon request.
$5 off interface with purchase of printer
Find your cheapest published price and we'll beat it!!

SP-2 INTERFACE for EPSON PRINTERS:

- 300-19,200 BAUD rates
- Fits inside printer — No AC Plugs
- Optional external switch ($5.00 extra) frees parallel port for use with other computers
- $49.95 (plus $3.00 shipping)

SP-3 INTERFACE for MOST OTHER PRINTERS:

- 300-19,200 BAUD rates
- External to printer — No AC Plugs
- Built in modem/printer switch - no need for Y-cables or plugging/unplugging cables
- $64.95 (plus $3.00 shipping)

Both also available for IBM, RS-232 and Apple IIC computers

DISK DRIVE SYSTEMS

ALL ½ HEIGHT DOUBLE SIDED

Drive 0 (addressed as 2 drives!)	$235
Drive 0,1 (addressed as 4 drives!)	$350

All above complete with HDS controller, cable, & drive in case with power supply

Bare Double Sided Drives	$109
Dual ½ Height Case w/Power Supply	$49
Double Sided Adapter	$25
HDS Controller, RS ROM & Instructions	$99
25 CDC DS/DD Diskettes	$32 & $3 s/h

We use the HDS controller exclusively. Can use 2 different DOS ROM's.
Shipping Costs: $5/drive or power supply, $10 max.
CoCo Serial Cables 15 ft —$10. CoCo/RS-232 Cables 15 ft —$20.
Other cables on request. (Add $3.00 shipping)

CNR ENGINEERING
P.O. Box 293
Raritan, NJ 08869
(201) 722-1055

```
$):L$=L$+A$(P)
34Ø RETURN
345 W=LEN(Z$):FORI=1TOW:IFMID$(Z
$,I,1)="."THEN355
35Ø NEXTI
355 D$=LEFT$(Z$,I):E$=RIGHT$(Z$,
W-I):A=VAL(D$):GOSUB265:R$=L$+"A
ND ":Q=LEN(E$):A=VAL(E$):GOSUB26
5:AL$=R$+L$+C$(Q+1):R$=R$+L$+C$(
Q):L$=""
36Ø IF LEFT$(R$,9)="ZERO AND "TH
EN R$=RIGHT$(R$,LEN(R$)-9)
365 RETURN
37Ø CLS:F=RND(G):L=RND(H)
375 Q$=" ":PQ$="":IF F=ØTHEN4Ø5
38Ø FORY=1TO F:K=RND(1Ø)-1:IF K=
Ø AND F=1 THEN K=1
385 K$=STR$(K):K$=RIGHT$(K$,1):Q
$=Q$+K$:NEXTY
39Ø IF VAL(Q$)=Ø THEN37Ø
395 IF VAL(LEFT$(Q$,2))=Ø THEN37
Ø
4ØØ IF L=Ø THEN43Ø
4Ø5 Q$=Q$+".":FORY=1TO L-1:K=RND
(1Ø)-1:IFK<4THEN K=Ø:GOTO415
41Ø K=RND(1Ø)-1
415 K$=STR$(K):K$=RIGHT$(K$,1):P
Q$=PQ$+K$:NEXTY
42Ø K=RND(9):K$=STR$(K):K$=RIGHT
$(K$,1):PQ$=PQ$+K$
425 Z$=Q$+PQ$:GOSUB345
43Ø IF DM=2THEN65Ø
435 CLS
44Ø IF DM=ØTHEN455
445 PRINT:PRINT" ENTER A DIGIT W
HICH REPRESENTS  THE FOLLOWING W
RITTEN NUMBER.":PRINT
45Ø GOTO46Ø
455 CLS:PRINT:PRINT" WHICH DIGIT
 BELOW REPRESENTS    THE FOLLOWI
NG WRITTEN NUMBER ?":PRINT
46Ø T=LEN(R$):IF T<=3ØTHEN485
465 FORI=3ØTOØSTEP-1:IFMID$(R$,I
,1)=" "THEN48Ø
47Ø IFMID$(R$,I,1)="-"THEN48Ø
475 NEXTI:GOTO485
48Ø L$=" "+LEFT$(R$,I):R$=RIGHT$
(R$,T-I):PRINTL$:GOTO46Ø
485 PRINT" "R$
49Ø IF DM=ØTHEN51Ø
495 PRINT:PRINT"    => ";:LINEIN
PUTZZ$
5ØØ IF VAL(ZZ$)=VAL(Z$)THEN615
5Ø5 GOTO6Ø5
51Ø P(1)=VAL(Z$):P(4)=P(1)*1Ø:P(
3)=P(1)*1Ø/1ØØ
515 V=P(1)-INT(P(1)):V=V*1Ø/1ØØ:
P(2)=INT(P(1))+V
52Ø IF LEFT$(PQ$,1)<>"Ø"THEN53Ø
525 TT=LEN(PQ$):QT$=RIGHT$(PQ$,T
T-1):QL$=Q$+QT$:P(2)=VAL(QL$)
53Ø P$(1)=Z$:FORI=2TO4:P$(I)=STR
$(P(I)):NEXT:P$(5)=P$(1)+"Ø"
535 FORY=1TO PC:IF RIGHT$(P$(Y),
3)<>"ØØ1"THEN55Ø
54Ø RT=LEN(P$(Y))-1:FORJ=RT TO 1
STEP-1:IF MID$(P$(Y),J,1)="Ø"THE
NNEXTJ
545 P$(Y)=LEFT$(P$(Y),J)
55Ø NEXTY
555 FORY=1TO PC
56Ø K=RND(PC):IF L(K)=1THEN56Ø
565 L(K)=1: K(Y)=K:NEXT
57Ø FORI=1TO5:L(I)=Ø:NEXTI
575 PRINT
58Ø FORI=1TO PC:PRINTTAB(6);CHR$
(64+I);") ";P$(K(I)):NEXT
585 X$=INKEY$:IFX$=""THEN585
```


Robotize Your Co Co with EMC

Our unique expansion hardware enables you to create a versatile automated control system. All EMC boards come fully assembled and computer tested.

Model 100 Parallel Port (PIA) — $53.85
Features: Two 8 Bit Bi-Directional Ports, 4 Control Lines, Sample Software Provided

Model 200 Buss Driver — $83.75
Features. TTL, Fanout of 10, 2 Card Slots and Flexible Ribbon Buss Provided. Additional Connectors Available.

Model 400 Mother Board — $54.75
Features 4 Slots, 5 Gold Pin Connectors, PC Board, for all Addr Decoded Boards.

Model 500 Motor Control Amp — $43.70
Features. TTL Compatable, LED Direction Indicators, Drives DC Motors 500 MA Max at 12 VDC.

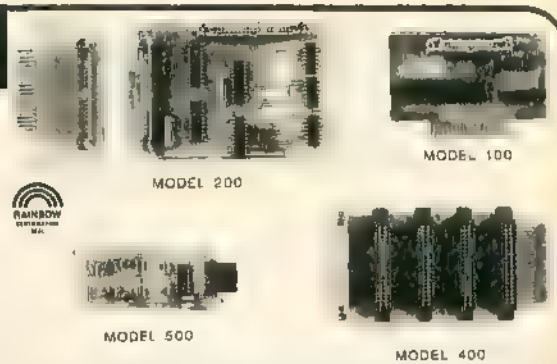

Purchases Add $3.00 Shipping & Handling with Check • Shipping is FREE with Money Orders • Flor da residents add 5% sales tax • Send for FREE Brochure • For Information Call (813) 896-8295

ELECTRONIC MOTION CONTROL
P.O. Box 17271 • ARPT Station
Clearwater, Florida 33520

Dealer Inquiries Welcome

```
175 G=4:H=4:PC=5:RETURN
18Ø PRINT@453," (D)IGIT OR (W)RI
TTEN ";
185 X$=INKEY$:IFX$="D"THEN2ØØ
19Ø IFX$="W"THEN DM=2:GOTO235
195 GOTO185
2ØØ PRINT@453," (S)ELECT OR (I)N
PUT  ";
2Ø5 X$=INKEY$:IFX$="S"THEN22Ø
21Ø IFX$="I"THEN225
215 GOTO2Ø5
22Ø DM=Ø:GOTO23Ø
225 DM=1
23Ø CLS
235 K=RND(-TIMER)
24Ø DATAONE,TWO,THREE,FOUR,FIVE,
SIX,SEVEN,EIGHT,NINE,TEN,ELEVEN,
TWELVE,THIRTEEN,FOURTEEN,FIFTEEN
,SIXTEEN,SEVENTEEN,EIGHTEEN,NINE
TEEN,TWENTY,THIRTY,FORTY,FIFTY,S
IXTY
245 DATASEVENTY,EIGHTY,NINETY,HU
NDRED,THOUSAND,TENTHS,HUNDRETHS,
THOUSANDTHS,TEN-THOUSANDTHS,HUND
RED-THOUSANDTHS
25Ø FORI=1TO19:READA$:A$(I)=A$+"
 ":NEXT:FORI=2TO9:READA$:B$(I)=A
$+" ":NEXT:READH$,TH$:H$=H$+" ":
TH$=TH$+" ":A$(2Ø)=B$(2)
255 FORI=1TO5:READC$(I):NEXT
26Ø GOTO37Ø
265 L$=""
27Ø IFA=ØTHENL$="ZERO ":GOTO34Ø
275 N$=STR$(A):W=LEN(N$):N$=RIGH
T$(N$,W-1):W=W-1
28Ø ON W GOTO32Ø,32Ø,3Ø5,3ØØ
285 P$=LEFT$(N$,2):P=VAL(P$):IFP
>2Ø THEN295
29Ø L$=L$+A$(P)+TH$:W=3:N$=RIGHT
$(N$,3):GOTO3Ø5
295 P$=LEFT$(N$,1):P=VAL(P$):L$=
L$+B$(P):P$=MID$(N$,2,1):P=VAL(P
$):L$=L$+A$(P)+TH$:N$=RIGHT$(N$,
3):GOTO3Ø5
3ØØ P$=LEFT$(N$,1):P=VAL(P$):L$=
L$+A$(P)+TH$:N$=RIGHT$(N$,3):W=3
3Ø5 P$=LEFT$(N$,1):P=VAL(P$):IF
P=ØTHEN315
31Ø L$=L$+A$(P)+H$
315 W=LEN(N$):N$=RIGHT$(N$,W-1)
32Ø P$=RIGHT$(N$,2):P=VAL(P$):IF
P>2Ø THEN335
325 L$=L$+A$(P)
33Ø GOTO34Ø
335 P$=LEFT$(N$,1):P=VAL(P$):L$=
L$+B$(P):P$=RIGHT$(N$,1):P=VAL(P
```


ADOS ENHANCED, EPROM-ABLE DISK BASIC

Now you can supercharge Basic with an impressive array of extra features WITHOUT sacrificing compatibility. ADOS is compatible with virtually 100% of commercial software. Customizing utilities are provided to allow user-defined command abbreviations, baud rate, separate tracks per disk (35 or 40), support of double sided drives and more. After customizing ADOS you can have it burned into an EPROM that plugs into the Disk Basic ROM socket or just use it in RAM as a 64K disk utility. EPROM + burning will cost about $20 we provide information concerning how you can have this done. Features include • repeat and edit of the last direct mode command • 26 definable control-key abbreviations • automatic line number prompts • DOS command • lowercase command entry (all the commands of a powerful but PBJ WordPak • COPY (rename) of drive number • AE error override option • RAM command (64K) • RUNM command • text echoing to printer • ML monitor • text file scan • enhanced directory • error trapping • and less text utility included. 42, 51 or 64 characters per line.

"I COULD NOT FIND ANY SOFTWARE THAT WOULD NOT RUN UNDER ADOS." THE RAINBOW December 1984

"I LOVE ADOS! A GENUINELY FIRST RATE PRODUCT." Color Micro Journal February 1985

"I WON'T PART WITH MY ADOS EPROM FOR ANYTHING NO COMPATIBILITY PROBLEMS." Hot CoCo, May 1985

Disk $27.95

THE PEEPER ML PROGRAM TRACER

Monitor machine language programs AS THEY ARE RUNNING. Peeper actually timeshares with the target program, giving FULL CONTROL as ML programs run. Switch instantly between watching regular program output and Peeper's trace of registers and stack on screen or printer, inspect memory in any of 26 display modes. Execution speed can be varied from full speed to the barest crawl or halted entirely as programs run. Single stepping, breakpoints, memory or register examine/change. Relocatable, supports 64K use (16K required). See February '85 review.

Disk $23.95 Tape $21.95 Assembler source listing Add 3.00

FASTAPE THE NEXT BEST THING TO A DISK DRIVE

Fastape allows cassette I/O at 3000 baud, TWICE NORMAL SPEED. Uses the high speed POKE 65495,0 mode and makes it convenient to stay in this mode throughout. Features automatic adjustment of cassette and printer parameters when speed mode is changed. Control-key functions for many Basic commands and for changing speed modes. Compatible with all file types and can be used with Talawriter 64 and many other tape utilities. (16K required) See July '85 review.

Tape ~~$24.95~~ $11.95 NEW DISCOUNT PRICE!!

SPECTROSYSTEMS

11111 N. Kendall Drive, Suite A108, Miami, Florida 33176 (305) 274-3899 Day or Eve

No delay on personal checks. Please add $2.00 shipping. Sorry, no credit cards or COD's.

- **COLOR BANKBOOK** $19.95
- **BUSINESS BANKBOOK**
  SYSTEM ONE
  FOR ONE DISK DRIVE
  $49.95
  SYSTEM TWO
  FOR TWO DISK DRIVES
  $49.95
- **SUPERDISK UTILITY**
  SEE REVIEW IN MAY '86 RAINBOW PAGE 191 $ 9.95
- **RADIOLOG** $ 9.95
  SEE REVIEW IN MAY '86 RAINBOW PAGE 209
- **CODE PRACTICE** $ 9.95

ORDERS OR INFORMATION

CALL 1-800-628-2828

EXTENSION 552

ALL PROGRAMS INCLUDE MANUALS, REQUIRE 32K AND 1 DISK DRIVE. ADD $2.00 SHIPPING & HANDLING. FLORIDA RES. ADD 5% SALES TAX

SUNRISE SOFTWARE

RAINBOW CERTIFICATION SEAL

8901 NW 26 ST DEPT R
SUNRISE, FL 33322

must enter the correct digit number to get a correct response. Keep in mind that the number entered must not have any commas in it. After a response has been given, you may press '@' for the score, but not during the input part. Otherwise, the '@' symbol is interpreted as an incorrect response.

When you finally go to the score card, either press 'C' to continue, 'Y' to run the program again, or 'N' to end the program.

The program should fit easily into a 16K CoCo, but if you have any doubts, PCLEAR1 first. You could also include the speed-up POKE as one of the lines, but quite honestly, the program runs rapidly enough as it is.

A Few Words About Title Maker

I have gotten letters from a few people who have had difficulty with the CoCo *Title Maker* from several months ago. While I don't have the time for individual replies, this should cover most of the concerns.

First, some have written and asked if there were any mistakes in the listing. No, the listing is without error. Some of you may have made typing errors when keying it in. When in doubt, subscribe to RAINBOW ON TAPE.

Some have said they get a ?DS error when trying to reload the BASIC program created by *Title Maker*. This happens only if you have left out a semicolon somewhere in the original listing. Recheck your typing. If that doesn't work, you could always load the new BASIC program into a word processor like *Color Scripsit*. First try loading the program into BASIC. If you get the ?DS error, it means you have a direct statement without a line number. List what has loaded to see in what line the problem appears. Then load the BASIC program into the word processor, and remerge the lines where this error occurs. Save the result and then relo into BASIC.

Others say they have gotten the ?F error when trying to load the new BAS program from disk. This only happe if you analyze the screen and then sa the screen to disk in machine languag What happens is that the machi language screen is saved with a /B extension. Use RENAME to give th machine language listing a /BIN exte sion, reload it into the *Title Maker*, ar then analyze it to disk. This should sol this very rare quirk.

As a rule of thumb, it is better to sa first, and then analyze second.

Conclusion

I hope this fourth installment in th Life Skills series proves valuable to yo whether you are a teacher or hav youngsters in the family. Keep thinkin up those ideas, and I'll see what I ca come up with. See you next month. [



The listing: LIFESKL4

```
1Ø REM**************************
15 REM* LIFE SKILLS MATH DRILL *
2Ø REM*    WRITTEN  NUMBERS    *
25 REM*    BY FRED B.SCERBO    *
3Ø REM*     6Ø HARDING AVE     *
35 REM*  NORTH ADAMS,MA Ø1247  *
4Ø REM*   COPYRIGHT (C) 1986   *
45 REM**************************
5Ø CLEAR8ØØ:DIMA$(2Ø),B$(9),C$(5
),P(5),P$(5),K(5),L(5),D$(2)
55 CLSØ:FORI=1TO32:PRINTCHR$(188
);:NEXT
6Ø FORI=1TO192:READA:IFA=ØTHENA=
16
65 PRINTCHR$(A+128);:NEXT
7Ø FORI=1TO32:PRINTCHR$(179);:NE
XT
75 DATA125,12Ø,8Ø,125,12Ø,116,12
6,124,122,125,124,125,,,3Ø,28,26
,29,,16,3Ø,2Ø,3Ø,2Ø,3Ø,16,2Ø,3Ø,
,21,28,29
8Ø DATA117,,,117,,,122,8Ø,12Ø,11
7,,116,112,,26,,24,21,,22,16,,26
,,26,,,26,,21,,2Ø
85 DATA117,,,117,,,123,122,8Ø,11
7,115,114,,,27,19,18,21,22,,,,26
,,26,,,26,,21,19,19
9Ø DATA117,,,117,,,122,12Ø,,117,
112,,,,,,26,21,2Ø,18,,,26,,26,,,
26,,,,21
95 DATA117,,122,117,,,122,,,117,
,113,,,26,,26,21,16,2Ø,18,,26,,2
6,21,,26,21,21,,21
1ØØ DATA119,115,122,119,114,113,
123,112,,119,115,119,,,27,19,26,
23,18,,27,17,27,17,27,23,17,27,2
3,21,19,23
1Ø5 PRINT@293,"  COMPUTER MATHDR
ILL  ";
11Ø PRINT@325,"   WRITTEN  NUMBE
RS   ";
115 PRINT@357,"   BY FRED B.SCER
BO   ";
12Ø PRINT@389,"  COPYRIGHT (C) 1
986  ";
125 PRINT@453,"  SKILL LEVEL  (1
-5)  ";
13Ø X$=INKEY$:IFX$=""THEN13Ø
135 RR=VAL(X$):IFRR<1THEN13Ø
14Ø IF RR>5THEN13Ø
145 ON RR GOSUB155,16Ø,165,17Ø,1
75
15Ø GOTO18Ø
155 G=2:H=1:PC=2:RETURN
16Ø G=2:H=2:PC=3:RETURN
165 G=3:H=3:PC=3:RETURN
17Ø G=3:H=4:PC=4:RETURN
```

Sugar Software

The CoCo Calligrapher

Use your CoCo, your 8-bit dot addressable graphics printer and the **CoCo Calligrapher** to create beautiful signs, invitations, flyers, greeting cards, diplomas, certificates, awards and love letters.

The original **Calligrapher** letters are 36 points (1/2 inch) high and variably spaced. It includes an easy-to-use, menu-oriented program and these three typestyles:

Old English

Old English

Cartoon

Cartoon

Gay Nineties

Gay Nineties

The CoCo Calligrapher requires 32K ECB.

Tape $24.95/Disk $29.95

ADDITIONAL TYPESTYLES

These tapes of additional typestyles are available for **$19.95 each.** They can be easily moved to disk. ***The original Calligrapher program is required.***

Tape 1 - Reduced, Reversed, and Reduced-Reversed versions

Old English **Gay Nineties** **Cartoon**

All typestyles on Tapes 2, 3, 4, 5, and 6 include Standard (1/2 inch), Reversed, Reduced, and Reduced-Reversed unless otherwise noted

Tape 2: Broadway/Old Style

Broadway Oldstyle

Tape 3: Business/Antique

Business Antique

*These disks of additional typestyles are available for **$49.95** each.*

Disk 1 - all type styles on Tapes 1, 2 and 3.

Disk 2 - all type styles on Tapes 4, 5 and 6.

Tape 4: Wild West/Checkers

Wild West Checkers

Tape 5: Star **Hebrew**

Stars שלום

Victorian (Standard and Reverse only)

Victorian

Tape 6: Block/Computer

Block

COMPUTER

The OS-9 Calligrapher

$39.95

Requires OS-9 Version 01.01.00 and a dot matrix printer. **The OS-9 Calligrapher** reads a standard input text file which contains text and formatting directives to produce standard utput for printer or disk. You can specify which font to use; centering; left, right or full justification; line fill; narrow mode; margin; line width; page size; page break and indentation.

*These disks of additional typestyles are available for **$49.95** each.* They are not compatible with the **CoCo Calligrapher** typestyles or program. OS-9 typestyle disk must be used with the **OS-9 Calligrapher.**

Disk 1 - OS-9 version of all type styles on Tapes 1, 2 and 3.

Disk 2 - OS-9 version of all type styles on Tapes 4, 5 and 6.

Dealer and author inquiries are always welcome. Canadian dealers should contact Kelly Software Distributors, Ltd., P.O. Box 11932, Edmonton, Alberta T5J-3L1, (403) 421-8003.

Disk software compatible with Radio Shack DOS only

SUGAR SOFTWARE
1710 N. 50th Ave.
Hollywood, Florida 33021
(305) 981-1241

A complete catalog of other sweet Sugar Software products is available.

Add $1.50 per program for postage and handling. Florida residents add 5% sales tax. COD orders are welcome. CIS orders EMAIL to 70405, 1374. **No refunds or exchanges.**

MasterCard VISA

level of the material if the work presented is either too easy or too difficult for the user.

To make this program more adaptable, I have limited the BASIC keywords to only those found in 16K Color BASIC. I have also intentionally left out any keywords which are not found in the MC-10 Color BASIC language such as ELSE or STRING$. MC-10 users should change the value in Line 235 (235 K=RND(-TIMER)) to 235 K=RND(-9999) or some other number. You may want to insert this value in the middle of Line 185, too, if you want to make the program truly random on the MC-10.

The first task I encountered in creating this program was to write an algorithm (set of program commands) to take a number and translate it to its written form. This requires storing the names of the numbers in string arrays and combining them to create the correct written equivalent.

Naturally, we can't store all the possible written numbers; our program would be gigantic. We want to store only those root parts to be combined as needed. For example, we don't save a string as sixty-three but combine the strings for sixty and three to form our answer. Therefore, the DATA statements contain all our possible written roots.

The next trick is to devise a way to create multiple-choice answers for a randomly generated number. However, since we need to deal with our numbers in their string form, a strange bug in BASIC caused me many hours of head scratching. It seems that every now and then, if we are dealing with STR$ and the VAL(X$) commands, BASIC decides to add a useless decimal tail to our number. Therefore, our string number of 23.56 may end up appearing as the mutant form 23.560001 when displayed on the screen. This causes great confusion to our user, so I had to find a way to chop off this tail whenever it appears.

After some trial and error, I was able to come across a set of lines to do just that. You may notice that the commands to create and analyze the numbers and strings are longer than necessary and may cover circumstances which our random numbers may not require. This was necessary in order to make the algorithm work.

These lines soon expanded into a full-blown program of 170 program lines. Funny how a simple idea can be expanded to such a degree. These are the steps we must take, however, in order to cover all the circumstances we want our program to deal with.

The earliest version of this listing incorporated this CPL concept only if the student checked his progress. Since my recent programs have allowed the user to check progress, then continue, I have found many students will check their progress every two minutes. I felt this would be a way to discourage that practice by having the difficulty level increase if the score was above 95 percent, or decrease if it was lower than 70 percent.

This did not prove suitable in cases where the student did not check the progress by pushing the '@' key. Therefore I included a routine to check the progress, without displaying it, every ten problems. If you want to change the minimum and maximum scores which trigger the change, alter the values of 70 and 95 in lines 795 and 805. The variable 'MS' stands for the Math Score for the program at that point.

The result of these line changes is that the student can be using the program, reviewing the material, and the program will vary the skill level to match the student's ability. Thus, if a student is left on autopilot, (which I do not advise), there is less likelihood of wasting time on unsuitable material.

If our program generates a number to be identified and has to create multiple choice answers, it usually generates them by moving the decimal place to the left or right. Some students noticed a pattern in my earliest version so I later included commands to break this pattern. Therefore, if a zero appears in the tenths place, one of the multiple choice answers will extract the zero. This allows us a truly random creation of multiple choice responses. This extraction occurs in about half of our cases.

One option I have avoided is having the user enter a written number to match a number in digits. This would cause great confusion as the user might include an extra space or misspell one of the root words. For example, if an answer is one hundred and twenty-on hundreths, but was entered as one hundred and twenty one hundreths, would be marked as incorrect. This onl frustrates our student.

Recently I was presenting some of m earlier educational programs to a grou of teachers in a private school when on of them expressed concern over m program's use of the word Wrong whe an incorrect answer was used. Sh asked, "Couldn't you say Sorry instea of Wrong? Wrong sounds so negative. Therefore, I have started using Sorr when an incorrect answer is entered.

"The program will vary the skill level to match the student's ability."

Using the Program

On running the program, our Lif Skills title card appears. I have tried t use a different color scheme with eac one. You are asked to select a skill leve from one to five with one being th easiest level. If a higher level is selected it continues to select problems from ar easier level as well in order to allow fo greater variety of selections.

Your next choice is digit or written

Choosing 'W' displays a number tha must be idenitified from the two choices listed below it. For example:

```
HOW WOJLD YOU WRITE OJT THE
FOLLOWING DIGIT ?
    72.41
A) SEVENTY TWO AND FORTY ONE
THOUSANDTHS
B) SEVENTY TWO AND FORTY ONE
HUNDRETHS
```

The user must press either 'A' or 'B' to respond. Pressing '@' gives the user a score card.

If 'D' is selected for digit, then there are two possible choices, either select or input.

The Select mode offers multiple choice digit answers to a written number. There may be anywhere from two to five multiple choice responses displayed, depending on the difficulty of the material. Pressing '@' gives the score card.

If you choose the Input mode, then a written number is displayed. The user

Computer-Paced Learning

By Fred Scerbo
Rainbow Contributing Editor

Editor's Note: If you have an idea for the "Wishing Well," submit it to Fred c/o THE RAINBOW. Remember, keep your ideas specific, and don't forget that this is BASIC. All programs resulting from your wishes are for your use but remain the property of the author.

As time passes, and more and more programs are written for our Tandy computers, software authors discover new uses for the BASIC language burned into the chips of our machine's ROM. This month's "Wishing Well" offering is no exception as we will introduce a new concept to our pages: CPL or Computer Paced Learning. This is done with our fourth Life Skills program titled *Written Numbers*.

The Wish: What is CPL?

More classrooms now have computer terminals in them. Teachers across the country have purchased millions of dollars of software and have quite often been cheated out of their school district's limited financial resources. There have been two very serious drawbacks to this development.

First, some school districts have joined in a game of one-upmanship by comparing expenditures on computers and software as if they were comparing new cars. This type of attitude can have a very negative impact on the goals of any computer program. What is needed is software geared to specific needs.

The second error that occurs is the tendency to put students on "autopilot" once appropriate software is found. Some students will gladly work on a program covering material too easy for their ability. Unless the student's level and progress are closely monitored, the student will drift off, running like a plane on autopilot, oblivious to all real learning.

Since we have a CPU (Central Processing Unit) in our machine capable of executing any logical command set given it, we can develop, with a little care, software which just might help us deal with these two problems. That's where the concept of CPL or Computer Paced Learning comes in. Our goal is to have our software actually monitor the student's progress during the running of the program and make adjustments in skill level based on that student's performance.

The Program: *Written Numbers*

Our first Life Skills program was a simulation that dealt with money handling skills and subtraction. Our second program was *Number Evaluation* in which the place value of numbers was examined. Program three dealt with *Ruler Reading Skills*. In *Written Numbers*, however, we return to the math skills originally introduced in *Number Evaluation*. Rather than identify the place in a number as was done in that program, this time we want to evaluate a number such as 55,697.25 and translate it to its written form of fifty-five thousand six hundred ninety-seven and twenty-five hundreths.

The first requirement of the program is that it have a variable skill level which can be selected from a menu. Next, it must deal with an evaluation of the numbers in both written and digit form. Third, it must allow for periodic checking of student score and progress. Finally, it must adjust the difficulty

Fred Scerbo is a special needs instructor for the North Adams Public Schools in North Adams, Massachusetts. He holds a master's in education and has published some of the first software available for the Color Computer through his software firm, Illustrated Memory Banks.

HI-RES II SCREEN COMMANDER

Are you tired of looking at the 16 line by 32 character display on your CoCo? Do you wish you could see more lines and characters? Then HI-RES II is the answer, it can give you the big screen display you've always wanted. It will display 24 lines of 32, 42, 51, 64 and even 85 true upper and lower case characters per line without any hardware modifications.

HI-RES II is the most powerful screen enhancement package available for the Color Computer, yet it is the least expensive. It is completely compatible and transparent to Basic. Once the program is loaded, everything works the same as before, only you have a much better display to work with. It even allows you to have mixed text and Hi-resolution graphics on the same screen or have separate text and graphics screens. It also has an adjustable automatic key repeat feature and allows you to protect up to 23 lines on the screen. HI-RES II features over 30 special control code functions that allow you to change characters per line, protect display lines, change background color, position cursor, switch normal/reverse video, underline, double size characters, erase line/screen/to end of screen, home cursor, character highlight and much more. It works on all models of the CoCo with 16, 32 or 64K and provides automatic reset control so HI-RES II won't disappear when you press reset

Only $24.95 for Tape and $29.95 for Disk

EDT/ASM 64D

64K DISK EDITOR ASSEMBLER w/DEBUG

EDT/ASM 64D is a Disk based co-resident Text Editor & Assembler. It has a Hi-Resolution 51, 64 or 85 column by 24 line display, so you see your program listings easily. It also supports the PBJ 80 Column Word-Pak cards The disk also contains a free standing Machine Language Debug Monitor, to help you debug your assembled programs.

The Editor in EDT/ASM 64D is the most powerfull, easy to use Text Editor available in any Editor/Assembler package for the Color Computer. It even has automatic line number generation for easy entry of program material. Some of it's features include.

- Local and Global string search and/or replace.
- Full screen line editing with immediate line update
- Easy to use Single keystroke editing commands.
- Load & Save standard ASCII formatted Tape/Disk files
- Move or Copy single & multiple text lines.
- Create and Edit disk files larger than memory
- Hi-Res Text Display 28 to 85 columns by 24 lines.
- Supports the PBJ 80 Column cards Word-Pak I & II

The Assembler portion of EDT/ASM 64D is the part that creates the Machine Language program. It processes the source file(s) created or edited by the text editor and creates a LOADM or CLOADM binary file on either Disk or Tape. Using library files you can assemble an unlimited size file, using several different disk drives.

- Supports conditional IF/THEN/ELSE assembly
- Supports Disk Library files (include)
- Supports standard motorola assembler directives
- Allows multiple values for FDB & FCB directives.
- Generates listings to Hi-Res text screen or printer
- Assembles directly to disk or tape in LOADM format
- Supports up to 9 open disk files during assembly
- Allows assembly from editor buffer, Disk or both.
- Full description text error messages

DEBUG is a free standing program debugger which provides all the functions supported by most system monitors. Some of them include:

- Examine and change the contents of memory.
- Set and display up to 10 breakpoints in memory
- Remove single or multiple breakpoints.
- Display/Change processor register contents.
- Dump Memory in Hex and ASCII format.
- Fill Memory range with a specified data pattern
- Move a block of memory.
- Search memory range for data pattern
- Disassemble memory into op-code format

Requires 32K and Disk $59.00

"The Source"

Now you can easily Disassemble Color Computer machine language programs directly from disk and generate beautiful, Assembler Source Code for a fraction of the cost of other Disassembler/ Source generator programs. And, the Source has all the features your looking for in a Disassembler.

- Automatic Label generation.
- Allows specifying FCB, FCC and FDB areas.
- Save, Load and Edit FCB, FCC, and FDB map on Disk.
- Disassembles programs directly from Disk
- Output complete Disassembled listing with labels to the Printer, Screen or both
- Generates Assembler compatible source files directly to disk
- Generated source files are in standard ASCII format.
- Built in Hex/ASCII dump/display to locate FCB, FCC and FDB areas in a program
- Built in Disk Directory and Kill file commands.
- Menu display with single key commands for smooth, Easy, almost foolproof operation
- Written in fast machine language, one of the quickest and easiest to use Disassemblers available

Requires 32K and Disk $34.95

TEXTPRO III

"The Advanced Word Processing System"

- 9 Hi-Resolution Display Formats from 28 to 255 columns by 24 lines.
- True Upper and Lower Case display format.
- Three Different Programmable Header lines, re-definable at anytime.
- Programmable Footer line & Automatic Footnote System
- 10 Programmable Tab stops & 7 Tab Function Commands
- Automatic Line Justification, Centering, Flush left and Flush right
- On screen display of underlining and Double size characters
- Change indents, margins, line length, etc. at anytime in a document
- Create and Edit files larger than memory, up to the size of a full disk
- Easily imbed any number of format and control codes for printers
- Automatic Memory sense 16-64K with up to 48K of workspace.
- Typist Friendly line and Command format entry w/ auto key repeat.
- Fully supports the use of 80 column hardware cards

TEXTPRO III is an advanced word processing system designed for speed, flexability and extensive document processing. It is not like most of the other word processing programs available for the Color Computer. If you are looking for a simple word processor to write letters or other short documents, then most likely you'll be better off with one of the other word processors. But, if you want a powerful word processing program with extensive document formatting features to handle large documents, term papers, manuals, complex formating problems and letter writing, then TEXTPRO is what your looking for. TEXTPRO works in a totally different way than most word processing programs. It uses simple 2 character abbreviations of words or phrases for commands and formatting information that you imbed directly in your text. There are over 50 different formating commands you can use without ever leaving the text your working on. There are no time comsuming, and often furstrating menu chases, you are in total control at all times. The formatted output can be displayed directly on the screen, showing you exactly what your printed document will look like before a single word is ever printed. This includes margins, headers, footers, page numbers, page breaks, underlining, column formating and full justification.

Disk $59.95 Tape $49.95

To order products by mail, send check or money order for the amount of purchase, plus $3.00 for shipping & handling to the address below

To order by VISA, MASTERCARD or C.O.D. call us at the number listed below (Monday thru Saturday, 8am to 5pm PST).

CER-COMP
5566 Ricochet Avenue
Las Vegas, Nevada 89110
☎ (702) 452-0632 ☎

HOT HARDWARE

UNIVERSAL VIDEO DRIVER

IT'S THE BEST!!! **Great Price! Only $29.95**

Carefully engineered to work with ALL Color Computer models including the newest COCO II. Enables your COCO to operate with a video monitor instead of a television.

- Works with monochrome monitors!
- Works with color monitors!
- Audio Connection included!
- Easy installation— no soldering!

PCX-II COMPUTER

Total IBM compatibility at sensational prices!!!

Complete computer systems starting as low as **$649.00.**
Check our performance and prices.

TANDY 1000 UPGRADES

640K upgrade board with real time clock	$189.95
Serial Interface Board	49.95
Parallel Interface Board	29.95
Hayes compatible 300/1200 Baud deluxe modem	189.95

QUALITY VIDEO MONITORS

Sakata SC-100 Color monitor with speaker and earphone jack	$179.95
Samsung MD-1251K Amber Screen - great price	89.95
Magnavox BM-7622 Amber Screen - high quality, low price	99.95

Order a quality monitor from us and get a Universal Video Driver for only $24.95 — Save $5.00.

PRINTERS AND ACCESSORIES

Citizen 120-D Printer, Deluxe features	Only $219.95
Star NX-10 Printer, New model for '86	279.95

GRAFX SCREEN - versatile screen dump software. Print horizontal or vertical, image magnification, positive or negative and more - 5¼" disc
ONLY $14.95

GRAFX SCREEN — FREE with your printer order.

SERIAL TO PARALLEL INTERFACE

300 to 9600 baud. Complete with all cables and connectors. **Only $49.95**

DISC DRIVES

Teac 55B DSDD Drive	$119.95
J&M JFD-CP Controller with DOS	139.95
Dual cabinet, power supply holds 2 horizontal 1/2 height drives	79.95
Drive one upgrade for new Tandy dual horizontal cabinet	119.95
Disc drive cable	24.95
Radio Shack DOS Rom 1.1 w/manual	29.95

DISCS • CASSETTES • ROMS • CHIPS

5¼" discs, double density, reinforced hub w/sleeve, guaranteed.
$12.95 for 10 discs in an attractive storage box.

C-10 Cassettes w/labels	10 for $5.50
Cassette storage box	10 for $2.00
Basic 1.2 ROM	$39.95
Extended 1.1 ROM w/Manual	$49.95

DISC STORAGE CASE - Attractive, heavy duty acrylic case with lock. Holds and protects 50 5¼" discs.

SUPER BARGAIN ONLY $9.95

Purchase this attractive storage case including 10 discs for $21.95.

64K Memory Expansion Kit.

All parts and complete instructions (for 'E' and 'F' boards and COCO II)

NOW ONLY $19.95

SUPER SOFTWARE

CyberTank



ORDER NOW! 64K Disk only. $27.95

NEW! OUTSTANDING GRAPHICS!

Tired of flying wimpy airplanes???

Want to try something macho for a change??

CYBERTANK is a real-time tank simulation that will get your adrenalin flowing!

Your survival depends upon lightening-fast tactical decisions. Penetrate deep into enemy territory with powerful intelligence gathering devices and sophisticated armaments. Cannons, heat seeking missiles, flame throwers, pill boxes, battle tanks . ***THIS ONE HAS IT ALL!!***

SHOCK TROOPER

Other Super Arcade Games:
Tut's Tomb
Time Fighter

Intelligence has intercepted a coded message revealing a plan to conquer Earth. Four of your Shocktroopers must infiltrate the heavily defended underground enemy base and steal all of the secret TRG-5 attack saucer sub-assemblies.

SUPER ACTION ARCADE GAME!!

THE VORTEX FACTOR

The Sixth & Most Challenging of our Adventures

What is it? What secrets does it hold? The seeker of treasures through time and space must find out! From the Coliseum of ancient Rome to the futuristic world of tomorrow.

UNFORGETTABLE ODYSSEY.

Other Exciting Adventures

Calixto Island
Shenanigans
Sea Search • Trekboer
Black Sanctum

All games - Cassettes $24.95 Discs $27.95 32K required.

COCO UTIL II - NEW VERSION

Transfer Coco disc files to your IBM compatible computer. You may also transfer MS-DOS files to a Color Computer disc. Save hours of retyping Coco Util has been so popular we decided to make it even more powerful and versatile... extended directories, faster, improved menu selection system and more!

$39.95

Coco [illegible] new version for only $12.95 including shipping and handling.

FOR THE SERIOUS COCO USER

Accounting System - very popular ledger system for small businesses.	$99.95 disk
Order Entry - an excellent companion to the accounting system	$99.95 disk
Easy File - get organized with this user friendly data management system	$59.95 disk

Super Screen Best screen enhancement program available
Cassette $29.95 Disk $32.95

FREE — Send for our free flier.

Mark Data Products

24001 Alicia Parkway, No. 207, Mission Viejo, CA 92691 • (714) 768-1551

SHIPPING: [illegible] shipping amount please remit U.S. funds. Software authors contact us for exciting program marketing details. We accept MasterCard and VISA. Distributed in Canada by Kelly Software.

```
14Ø '************************
15Ø '**GET FILE TO CORRECT **
16Ø '************************
17Ø '
18Ø CLS:PRINT@23Ø,"";:INPUT   "E
NTER FILE #                    T
O BE CORRECTED";FI
19Ø GOSUB 67Ø
2ØØ IFFI<1ORFI>LOF(1)THENCLOSE#1
:GOTO18Ø
21Ø GET#1,FI:A1$=A$:B$=B1$:CLOSE
#1
22Ø '
23Ø '************************
24Ø '**   PROCESS ROUTINE   **
25Ø '************************
26Ø '
27Ø PS=1:POKE65495,Ø:CLS:IFSE=1T
HENB$=STRING$(64," ")
28Ø IFSE=1THENPRINT@448,"TYPE PU
ZZLE THEN PRESS ENTER":ELSE PRIN
T@448,"DO CORRECTIONS THEN PRESS
 ENTER"
29Ø C1$=MID$(B$,PS,1):IFASC(C1$)
>64ANDASC(C1$)<91THENCUR$=CHR$(A
SC(C1$)+32):ELSECUR$=CHR$(128)
3ØØ C$=INKEY$:PRINT@Ø,B$:PRINT@P
S-1,CUR$;:IFC$=""THEN29Ø
31Ø IFC$=CR$THENPOKE65494,Ø:GOTO
38Ø
32Ø IFC$=L$ANDPS>1THENPS=PS-1:GO
TO3ØØ
33Ø IFC$=R$ANDPS<64THENPS=PS+1:G
OTO3ØØ
34Ø IF C$=L$ORC$=R$THEN3ØØ
35Ø MID$(B$,PS,1)=C$
```

```
JANES        SCORE $ 105.00
JOHNS        SCORE $ 0.00




      ** GAME OVER **
   (1)-NEW GAME (2)-END
```

```
36Ø IFPS<64THENPS=PS+1
37Ø GOTO3ØØ
38Ø CLS:PRINT@Ø,B$
39Ø PRINT@23Ø,"ENTER CATEGORY
                (1)-PHRASE
                (2)-TITLE
                (3)-PLACE
                (4)-PERSON
                (5)-PRESIDENT
               ";
4ØØ INPUT                      "
 (6)-BIBLE PHRASE
 MAKE SELECTION";A1$
41Ø IFA1$<"1"ORA1$>"6"THEN39Ø
42Ø GOSUB67Ø
43Ø LSETA$=A1$:LSETB1$=B$
44Ø IFSE=1THENPUT#1,LOF(1)+1:ELS
EPUT#1,FI
45Ø CLOSE#1:RETURN
46Ø '
47Ø '************************
48Ø '** LIST FILE ROUTINE   **
49Ø '************************
5ØØ '
51Ø CLS:PRINT@23Ø,"";:INPUT"DO Y
OU WANT                   HARD
 COPY Y/N";CO$:IFCO$<>"Y"ANDCO$<
>"N"THEN51Ø
52Ø GOSUB67Ø
53Ø CLS:PRINT"FILE LENGTH=";LOF(
1):INPUT"ENTER FILES:START,END";
ST, EN:IF EN>LOF(1)THENEN=LOF(1)
:ELSEIFST<1ORST>LOF(1)OR EN<1OR
EN >LOF(1)ORST> EN THEN53Ø
54Ø IFCO$="Y"THENPRINT#-2,CHR$(2
7);CHR$(2Ø):PRINT#-2,"CATEGORIES
";CR$;"(1)-PHRASE";CR$;"(2)-TITL
E";CR$;"(3)-PLACE";CR$;"(4)-PERS
ON";CR$;"PRESIDENT"
55Ø IFCO$="Y"THENPRINT#-2:PRINT#
-2:PRINT#-2,"RECORD  CATAGORY
NOMENCLATURE"
56Ø FORX=ST TO EN
57Ø GET#1,X:A1$=A$:B$=B1$
58Ø PRINT"RECORD";X;CR$;"CATAGOR
Y";CR$;A1$;"-";CAT$(VAL(A1$));CR
$;B$
59Ø IF CO$="Y"  THEN PRINT#-2, U
SING P$ ; X,A1$,B$
6ØØ IFCO$="N"THENFORY=1TO15ØØ:NE
XTY
61Ø NEXTX:CLOSE#1:IF CO$="Y"THEN
PRINT#-2,CHR$(27);CHR$(19);:RETU
RN:ELSE RETURN
62Ø '
63Ø '************************
64Ø '**    OPEN FILES      **
65Ø '************************
66Ø '
67Ø OPEN "D",#1,"CATEGORY",65
68Ø FIELD#1,1AS A$,64 AS B1$:RET
URN
69Ø DATA PHRASE,TITLE,PLACE,PERS
ON,PRESIDENT,BIBLE PHRASE
```

```
)2G1L2H1U1
217Ø DATA BR5BD1ØU8G4R6,BR6BD2L4
D3R3F1D3G1L2H1U1,BR6BD3H1L2G1D6F
1R2E1U3H1L1G1,BR2BD2R4D2G3D3
218Ø DATA BR3BD2R2F1D2G1L2R2F1D2
G1L2H1U2E1H1U2E1,BD9BR2F1R2E1U6H
1L2G1D2F1R2,BR4BD3D1BD3D1,BR4BD3
D1BD3D1G1
219Ø DATA BR6BD2G4F4,BD4BR2R4BD3
L4,BD2BR2F4G4,BR2BD3E1R2F1D1G2D1
BD2D1
22ØØ DATA BR4BD6H1G1F1E1U1D1R2U2
H1L3G1D3F1R4E1,BD9BR2U4R3L3U2E1R
2F1D6,BR2BD2R3F1D1G1L2R2F1D2G1L3
U7,BR6BD2D1U1L4D7R4U1
221Ø DATA BR2BD2R1D7L1R3E1U5H1L3
,BR6BD2L4D3R2L2D4R4,BR6BD2L4D3R2
L2D4,BR6BD3U1L4D7R4U3L1
222Ø DATA BR2BD2D7BR4U4L3R3U3,BR
4BD2L1R2L1D7L1R2,BR6BD2D6G1L2H1,
BR2BD2D7U4R1E3G3F3D1
223Ø DATA BR2BD2D7R4,BD9BR2U7F2E
2D7,BD9BR2U7F4D3U7,BR2BD2D7R4U7L
4
224Ø DATA BD9BR2U7R3F1D2G1L3,BR2
BD3D5F1R2E1F1H3F2U5H1L2,BD9BR2U7
R3F1D1G1L2F3D2,BR6BD3U1L4D3R4D4L
4U1
225Ø DATA BD2BR2R4L2D7,BR2BD2D7R
4U7,BR2BD2D5F2E2U5,BR2BD2D7E2F2U
7
226Ø DATA BR2BD2D1F4D2BL4U2E4U1,
BR2BD2D1F2E2U1BL2BD2D5,BD2BR2R4D
1G4D2R4,BR5BD2L3D7R3
227Ø DATA BR2BD2D1F4D2,BR3BD2R3D
7L3,BR4BD2G2E2F2H2D7,BD6E2G2F2H2
R4
228Ø DATA BR2F2,BD6BR6H1L2G1D2F1
R2E1U1D3,BR2BD2D7R2E1U2H1L1G1,BD
5BR3F1BD2G1L1H1U1E1
229Ø DATA BR5BD2D6G1L2H1U1E1R1F1
,BD6BR2R3U1H1L2G1D3F1R2E1,BD9BR3
U3L1R2L1U2E1R1F1,BD8BR2F1R2E1U4H
1L2G1D1F1R2
23ØØ DATA BR2BD2D7BR4U2H1L2G1,BR
4BD3D1BD2D3,BR5BD2D1BD2D3G1L1H1,
BR2BD3D4E3G2F3BL4U2
231Ø DATA BR4BD3D6,BD9BR2U4F2E2D
4,BD9BR2U4D2E2R1F1D3,BD9BR2U4R4D
4L4
232Ø DATA BD9BR2U5R2F1D1G1L2,BD9
BR5U4H1L2G1D1F1R2,BD9BR2U4D2E2R1
,BD9BR2R2E1H1L1H1E1R2
233Ø DATA BD9BR4U6D2L2R4,BD9BR2U
4D4R5L1U4,BD7BR2U2D2F2E2U2,BD9BR
2U4D4E2F2U4
234Ø DATA BD9BR2E4BL4F4,BD9BR4U2
H2F2E2,BR6BD9L4E4L4
235Ø '**LAST ALPHA CHARACTER**
236Ø '
237Ø '********************
238Ø '***DATA FOR MENU ***
239Ø '********************
24ØØ '
241Ø DATA ****************
242Ø DATA * (1)-SOLVE     *
243Ø DATA * (2)-BUY VOWEL *
244Ø DATA * (3)-SPIN      *
245Ø DATA ****************
246Ø DATA 125,75,5,152,92,1Ø,159
,115,9Ø,152,136,2Ø,12Ø,151,BR,92
,14Ø,3Ø,81,114,7Ø,91,9Ø,8Ø
247Ø DATA 152,8Ø,176,1Ø8,172,136
,156,16Ø,1Ø6,162,84,14Ø,84,1ØØ,1
ØØ,8Ø
248Ø DATA PHRASE,TITLE,PLACE,PER
SON,PRESIDENT,BIBLE PHRASE
249Ø '
25ØØ '************************
251Ø '**    THEME SONG        **
252Ø '************************
253Ø '
254Ø FORTS=1TO2:PLAY"T6O2L8D#EGA
L4CBAA-GG#L2AL4GG#AB-BP16O+CO-BA
A-GG#L2AL4GG#ABO+C":NEXTTS:PLAY"
T255L255O5":RETURN
```

```
190 .......27
350 ......174
540 .......20
END .....143
```

Listing 2: CREATOR

```
1Ø '*************************
2Ø '* CREATE & CORRECT FILES *
3Ø '*   FOR FORTUNE WHEEL    *
4Ø '*    (C)-OCT.1984        *
5Ø '*  BY:ARRON W.BRANIGAN   *
6Ø '*************************
7Ø '
75 FOR X=1TO6:READCAT$(X):NEXTX
8Ø CR$=CHR$(13):L$=CHR$(8):R$=CH
R$(9)
9Ø P$=" #####    %%       %

                           %"
1ØØ CLS:PRINT@23Ø,"";:INPUT   "
(1)-CREATE FILES
(2)-CORRECT FILES
(3)-LIST FILES
(4)-END
MAKE SELECTION";SE
11Ø IFSE=4THENPOKE65494,Ø:END
12Ø ON SE GOSUB 27Ø,18Ø,51Ø:GOTO
 1ØØ
13Ø '
```

```
UB187Ø
157Ø CX=1:IFWI=1THENRETURN
158Ø X1=3Ø:Y1=172:SP=8:CH=Ø:CX=Ø
:FX=Ø:GOSUB187Ø:A$="SORRY BAD GU
ESS":GOSUB114Ø:GOSUB187Ø:RETURN
159Ø '
16ØØ '************************
161Ø '**  END GAME ROUTINE   **
162Ø '************************
163Ø '
164Ø FORTG=1TORD:K$(TG)="":NEXTT
G:'***ZERO K$(TG)***
165Ø Y1=36:X1=8:Y=Ø
166Ø IFPL=1THEN177Ø
167Ø '****BUBBLE SORT****
168Ø C=Ø
169Ø FORY=1TOPL-1
17ØØ IFSC(Y)<=SC(Y+1)THEN175Ø
171Ø S=SC(Y):S$=N$(Y)
172Ø SC(Y)=SC(Y+1):N$(Y)=N$(Y+1)
173Ø SC(Y+1)=S:N$(Y+1)=S$
174Ø C=1
175Ø NEXTY
176Ø IFC=1THEN168Ø
177Ø PCLS1:LINE(Ø,Ø)-(255,192),P
RESET,B:LINE(2,2)-(253,19Ø),PRES
ET,B
178Ø X1=8:Y1=Ø:FOR BU= PL TO 1 S
TEP-1:Y1=Y1+12:A$=N$(BU)+"S"+STR
ING$(1Ø-LEN(N$(BU))  ," ")+" SCO
RE $"+STR$(SC(BU))+".ØØ":GOSUB11
4Ø:N$(BU)="":SC(BU)=Ø:NEXTBU:'**
PRINT SCORES"
179Ø X1=8*8:Y1=172-12:SP=8:A$="*
* GAME OVER **":GOSUB114Ø
18ØØ X1=8*6:Y1=172:SP=8:EX=1:A$=
"(1)-NEW GAME (2)-END":GOSUB114Ø
181Ø G$=INKEY$:'***RESET KEYBOAR
D***
182Ø G$=INKEY$:IFG$=""THEN182Ø
183Ø IFG$<"1"ORG$>"2"THEN182Ø
184Ø IFG$="1"THENGOSUB13ØELSEPOK
E65494,Ø:END
185Ø GOTO 53Ø
186Ø '
187Ø '************************
188Ø '*COPY SCREENS 5-8 TO1-4 *
189Ø '************************
19ØØ '
191Ø FORD=4TO1STEP-1:PCOPYD+4TOD
:NEXTD:RETURN
192Ø '
193Ø '************************
194Ø '**FOLLOWING DATA IS FOR**
195Ø '**LEARNING THE ARROWS  **
196Ø '************************
197Ø '
198Ø DATA U23G4E4F4
199Ø DATA E15L4R4D4
2ØØØ DATA R23H4F4G4
2Ø1Ø DATA F15U4D4L4
2Ø2Ø DATA D23E4G4H4
2Ø3Ø DATA G15U4D4R4
2Ø4Ø DATA L23E4G4F4
2Ø5Ø DATA H15R4L4D4
2Ø6Ø '
2Ø7Ø '************************
2Ø8Ø '**FOLLOWING DATA'S FOR **
2Ø9Ø '**LEARN THE ALPHABET   **
21ØØ '************************
211Ø '
212Ø DATA C1BR1BD1D1ØR1U1ØR1D1ØR
1U1ØR1D1ØR1U1ØR1D1ØR1U1ØCØ,BR4BD
2D3BD2BD1D1,BR2BD2D1BR3U1,BR3BD3
D6BR2U6BF2L6BD2R6
213Ø DATA BR4BD2D8U1H2F2E2H4E2F2
,BR3BD2D1BR3BU1D2G4D2BR3U1,BD1ØB
R6U2H4U1E2F2G4D1F2E3,CØBR4BD2D2C
1
214Ø DATA BR5BD2G2D4F2,BR3BD2F2D
4G2,BR4BD4G2F1E2F1G2,BR4BD4D4BH2
R4
215Ø DATA BR4BD9D1G1,BD6BR2R4,BR
4BD8D1,BR2BD8E5
216Ø DATA BR4BD2L1G1D6F1R2E1U6H1
L1,BR4BD2BG2E2D8L2R4,BD4BR2U1E1R
2F1D2G4D1R5,BR2BD4U1E1R2F1D2G1F1
```


THE SOFTWARE HOUSE
(A DIVISION OF DATAMATCH, INC.)

DATAMATCH DISKETTES
DOUBLE SIDE / DOUBLE DENSITY
10/$9.00 100/$85.00

DATAMATCH 'FLIPPYS'
DS/DD - 2 NOTCHES, 2 ID HOLES
10/$9.95 100/$95.00

SENTINEL COLORS
SS OR DS,DD - 12 AST'D COLORS
12/$12.95 100/$99.95

ALL DISKS COME WITH TYVEK SLEEVES, LABELS, W.P.TABS

COLOR RIBBONS: Red, Green, Blue, Brown
GEM/OKI 4/$10.00
EPSON 4/$24.00
APPLE/NEC 4/$24.00

Add $2.50 S/H in U.S.A - Canada Add $3.50
Michigan Residents Add 4% Sales Tax

Send check or money order payable to:
THE SOFTWARE HOUSE
9020 Hemingway, Redford, MI 48239
(313) 937-3442
Send Card Number and Exp. Date
Min. Charge Order $20.00

VISA MasterCard

```
1Ø8Ø NEXTX3
1Ø9Ø FL=FL+1:CH$(FL)=LT$:'**REME
MBER CHECK VALUE***
11ØØ PCOPY1TO5
111Ø CLS:X=Ø:R=Ø:SCREEN1,1:RETUR
N
112Ø '
113Ø '************************
114Ø '*DRAW CHARACTER ROUTINE *
115Ø '************************
116Ø '
117Ø Y6=Ø
118Ø X4=Ø:FORX2= 1TOLEN(A$):X$=S
TR$(X1+X4*SP):Y$=STR$(Y1+Y6):PLA
Y"1":A1=ASC(MID$(A$,X2,1))-31:DR
AW"BM"+X$+","+Y$+L$(A1):X4=X4+1:
IFY6=ØANDX4=32ANDEX=1THENY6=12:X
1=Ø:X4=Ø:NEXTX2:ELSE NEXTX2:PLAY
"V31":DRAW"S4"
119Ø RETURN
12ØØ '
121Ø '************************
122Ø '*BUY VOWEL AND DRAW    **
123Ø '*BLANKS & PUNCTUATION  **
124Ø '************************
125Ø '
126Ø IFE$="2"ANDSC(PI)<25THENRET
URN
127Ø IFE$="2"THENDRAW"S4":X1=8:Y
1=172:SP=8:GOSUB187Ø:A$=N$(PI)+"
 ENTER VOWEL ?":GOSUB114Ø
128Ø IFE$="2"THENV$=INKEY$:IFV$=
""THEN128Ø
129Ø PLAY"V31":FORDD=1TO5:PLAY"C
DEFGAB":NEXTDD:PLAY"V31"
13ØØ IFE$="2"THENIFV$=CHR$(13)OR
V$><"A"ANDV$><"a"ANDV$><"E"ANDV$
><"e"ANDV$><"I"ANDV$><"i"ANDV$><
"O"ANDV$><"o"ANDV$><"U"ANDV$><"u
"THENPLAY"AAAAAAAAAAAAA":GOTO128
Ø
131Ø VC=Ø:X1=-8:Y1=1:FORX5=1TOLE
N(C$):X1=X1+8:A$=MID$(C$,X5,1):I
FX5=33THENX1=Ø:Y1=13
132Ø IFE$=""THENIFA$="'"ORA$="!"
ORA$="#"ORA$="$"ORA$=":"ORA$=";"
ORA$=","ORA$="."ORA$="?"THENGOSU
B114Ø
133Ø IFA$=" "ANDE$=""THENL$(1)=B
K$:GOSUB114Ø:L$(1)=B1$
134Ø IFE$="2"ANDV$=A$THENCH=1:GO
SUB114Ø:VC=1
135Ø NEXTX5:IFE$="2"THENSC(PI)=S
C(PI)-25:PCOPY1TO5:RETURN:ELSE P
COPY1TO5:RETURN
136Ø '
137Ø '************************
138Ø '**   SOLVE ROUTINE    ***
139Ø '************************
14ØØ '
141Ø WI=Ø:SLV$="":X1=Ø:Y1=36:SP=
8:A$=CHR$(123):GOSUB114Ø
142Ø SV$=INKEY$:IFSV$=""THEN142Ø
143Ø IFSV$=CHR$(13)THEN154Ø
144Ø IFSV$=CHR$(8)THENSLV$=MID$(
SLV$,1,LEN(SLV$)-1):A$=CHR$(124)
:GOSUB114Ø:X1=X1-8:GOTO147Ø
145Ø IFASC(SV$)>=8ANDASC(SV$)<=1
3THENPLAY"O1AAAAAAAAAAAAAO5":GOT
O142Ø:ELSEIFASC(SV$)>=91ANDASC(S
V$)<=95ORSV$=CHR$(21)THENPLAY"O1
AAAAAAAAAAAAO5":GOTO142Ø:'***KIL
L UNWANTED KEYS***
146Ø A$=CHR$(124):GOSUB114Ø:SLV$
=SLV$+SV$:A$=SV$:GOSUB114Ø:X1=X1
+8
```

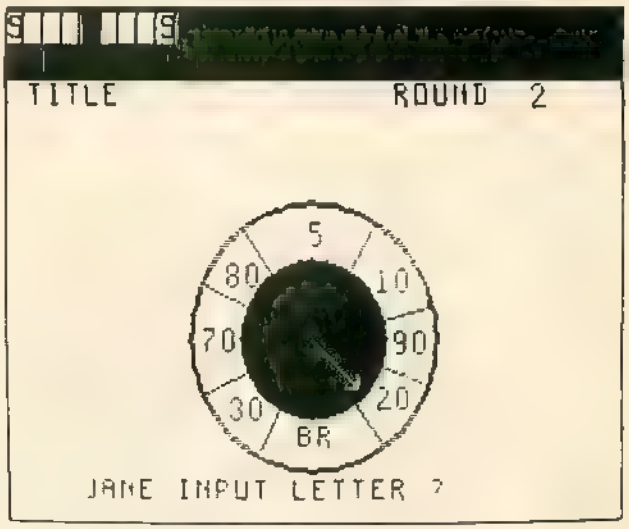


```
147Ø LS=LEN(SLV$)
148Ø IFLS>31THENY1=48
149Ø IFLS=32THENX1=Ø
15ØØ IFLS=31THENX1=248
151Ø IFLS<32THENY1=36
152Ø IFSV$=CHR$(8)THENA$=" ":GOS
UB114Ø
153Ø A$=CHR$(123):GOSUB114Ø:GOTO
142Ø
154Ø SOV$=SLV$+STRING$(64-LEN(SL
V$)," "):'***ADD BLANK SPACES***
155Ø IFC$=SOV$THENSC(PI)=SC(PI)*
3:FORTY=1TO1Ø:FORFD=ØTO1:SCREEN1
,FD:PLAY"O4EFG":NEXTFD:NEXTTY:PL
AY"O1":FORDD=1TO2:FORCC=1TO4:PLA
Y"1;2;3;4;5;6;7;8;9;1Ø;11;12O+":
NEXTCC:FORCC=1TO4:PLAY"12;11;1Ø;
9;8;7;6;5;4;3;2;1O-":NEXTCC:NEXT
DD:PLAY"O5":WI=1
156Ø IFWI=1THENX1=Ø:Y1=1:EX=1:A$
=SLV$:GOSUB114Ø:FORE=2TO4:PCOPYE
+4TOE:NEXTE:X1=8:Y1=172:SP=8:DRA
W"S4":A$=N$(PI)+" WINS ROUND $"+
STR$(SC(PI))+".ØØ":GOSUB114Ø:GOS
```

The art of entertainment

Pinball Factory *by Kary McFadden*

The video game comes full circle in this glorious tribute to the original. Classic pinball spings to life as never before, with fresh new angles that only the computer can offer. Crisp graphics, sound, and fast, smooth action give this machine-language arcade game a realistic, responsive feel you'll hardly believe. There are even "tilt" buttons that let you "bump" the machine!

In addition to playing a great game of pinball, you can enjoy hours of creative pleasure as you design, build, and edit your own screens. Save and load your favorite creations. The joystick-controlled cursor makes it all easy.

Change the board: build with bumpers, tabs, and a multitude of solid obstacles to form any configuration imaginable.
Change the face: draw your own title board with lines, rays, and shape patterns. Add text in three different colors, and two dirrent sizes.
Change the rules: alter the gravity, bounce, and scoring!

64K Color Computer required. $34.95

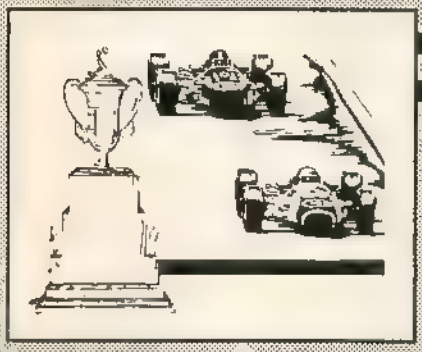

Speed Racer *by Steven Hirsch*

The checkered flag drops as your pulse rises in this lively new arcade game. The road twists to the horizon on the 3-D panorama that sets the stage for the most exciting race the CoCo has ever seen!

Vie for time as you speed through the curves at incredible speeds. Step through the gears to stay ahead of the pack, but step lively since some will stop at nothing to see the end of the race, or the end of you!

Four challenging raceways, complete with obstacles and colorful 3-D scenery, put your skills to the test in this Pole Position™ type game.

32K Color Computer required. $34.95

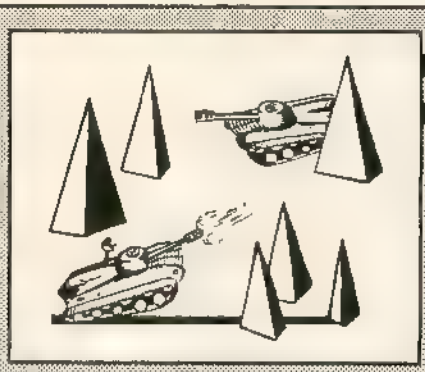

Rommel 3-D *by Kary McFadden*

You clutch the tank controls, searching for any sign of the enemy. Suddenly a blip appears on radar! Frantically, you move your tank into position. At last you spot the elusive enemy tank! Facing it, you race to lock sights and fire before he does!

Enter the ultimate battle-zone in this exciting 3-D tank combat game. Strategy, speed, and your tank's cannon are your only hope as you wind through a three-dimensional course inhabited by impenetrable barriers and enemy tanks.

Dazzling graphics and lifelike sound take you a step beyond the ordinary in this fast, machine-language arcade game. Enter the next dimension, ROMMEL'S troops are waiting for you!

32K Color Computer required. $29.95

MichTron

576 S. Telegraph, Pontiac, MI 48053
Orders and Information (313) 334-5700
Prices Do Not Include Shipping and Handling

```
1Ø:ELSE DRAW"BM128,12ØC1S5;XA$(1
);":'**COPY PAGE 5-8 TO 1-4 AND
GO PRINT PUNCTUATION AND SPACES*
**
77Ø IFGY=1THENX1=8:Y1=25:SP=8:DR
AW"S4":A$=STRING$(12," "):GOSUB1
14Ø:A$=CAT$(CAT):GOSUB114Ø:X1=16
Ø:A$=STRING$(9," "):GOSUB114Ø:A$
="ROUND "+STR$(RO):GOSUB114Ø:PCO
PY 1 TO 5:GY=Ø:GOSUB254Ø
78Ø IF CW>= CV THENE$="1":GOTO83
Ø
79Ø DRAW"CØS4":CH=Ø:CX=Ø:X1=8:Y1
=172:SP=8:A$=N$(PI)+"S TURN:SCOR
E=$"+STR$(SC(PI))+".ØØ":GOSUB114
Ø
8ØØ PUT (6Ø,96)-(196,156),M,PSET
:X1=168:Y1=132:'**DISPLAY MENU**
81Ø E$=INKEY$:IFE$><""THEN82ØELS
EA$=" ":GOSUB114Ø:A$="#":GOSUB11
4Ø:GOTO81Ø
```

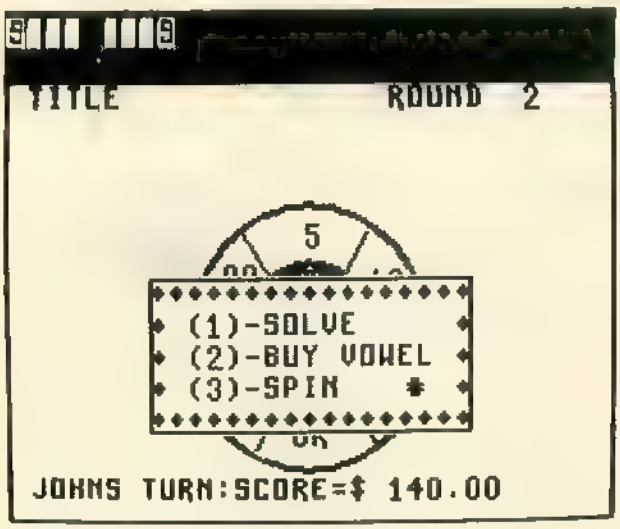


```
82Ø IF E$<"1"ORE$>"3"THEN81ØELSE
E=VAL(E$)
83Ø PLAY"V31":FORDD=1TO5:PLAY"CD
EFGABV<":NEXTDD:PLAY"V31"
84Ø IF CW >= CV THEN PZ=PZ+1:X1=
-16:Y1=172:SP=8:EX=1:DRAW"S4":GO
SUB187Ø:A$="ONLY VOWELS REMAIN "
+N$(PI)+" SOLVE":GOSUB114Ø:PLAY"
T2L2GL255T255":E=1:CH=Ø
85Ø ON E GOSUB 137Ø,121Ø,95Ø:'**
GOTO GUESS BUY VOWEL OR SPIN ROU
TINE**
86Ø IF CH=1THEN76Ø
87Ø IFCX=1ORFL=64ORWI=1 THENX1=Ø
:Y1=1:SP=8:EX=1:FOREE=1TOFL:CH$(
EE)="":NEXTEE:FL=Ø:NEXTRO:GOTO16
ØØ
88Ø IF PZ>= PL THENX1=Ø:Y1=1:SP=
8:EX=1:A$=MID$(C$,1,TL):GOSUB114
Ø:X1=8:Y1=36:EX=1:A$="SORRY NO W
INNER THIS ROUND":GOSUB114Ø:FORE
E=1TOFL:CH$(EE)="":NEXTEE:FL=Ø:N
EXTRO:GOTO16ØØ
89Ø GOTO 75Ø
9ØØ '
91Ø '************************
92Ø '**  SPIN ROUTINE       **
93Ø '************************
94Ø '
95Ø DRAW"S5":T=RND(2Ø)
96Ø GOSUB187Ø
97Ø FORE=1TOT:FORX=1TO8:Y=X-1:DR
AW"BM128,12ØCØ;XA$(Y);":DRAW"BM1
28,12ØC1;XA$(X);":PLAY"GFE":IFR>
T+1ØØTHENGOTO98Ø ELSE R=R+3:FORT
Z=1TOR:NEXTTZ:NEXTX:NEXTE:GOTO97
Ø:'***SPIN***
98Ø IFX=5THENX1=8:Y1=25:SP=8:SC(
PI)=Ø:DRAW"S4CØ":FORTP=1TO2Ø:FOR
TK=ØTO1:SCREEN1,TK:PLAY"O3BC":NE
XTTK:NEXTTP:A$=STRING$(15," "):G
OSUB114Ø:A$="BANKRUPT":GOSUB114Ø
:PLAY"T4L4":FOREC=1TO5:PLAY"O3CO
1C":NEXTEC:CH=Ø:CX=Ø:PLAY"T255L2
55O5":GOTO111Ø
99Ø DRAW"S4CØ":X1=3Ø:Y1=172:SP=8
:A$=N$(PI)+" INPUT LETTER ?":GOS
UB114Ø
1ØØØ PLAY"T255L255":W$=INKEY$:'*
*SET PLAY & RESET KEYBOARD**
1Ø1Ø LT$=INKEY$:IFLT$=""THEN1Ø1Ø
1Ø2Ø IFASC(LT$)>=8ANDASC(LT$)<=1
3THENPLAY"O1AAAAAAAAAAAAAAAAAAAA
O5":GOTO1Ø1Ø:ELSEIFASC(LT$)>=91A
NDASC(LT$)<=95ORLT$=CHR$(21)THEN
PLAY"O1AAAAAAAAAAAAAAAAO5":GOTO1
Ø1Ø:'***KILL UNWANTED KEYS***
1Ø3Ø IF LT$=CHR$(32)ORLT$="A"ORL
T$="a"ORLT$="E"ORLT$="e"ORLT$="I
"ORLT$="i"OR LT$="O"ORLT$="o"ORL
T$="U"ORLT$="u"THENPLAY"O3AAAAAA
AAAAAAAAAAO5":GOTO1Ø1Ø:'***KILL
VOWELS***
1Ø4Ø PLAY"V31O5":FORDD=1TO5:PLAY
"CDEFGABV<":NEXTDD:PLAY"V31"
1Ø5Ø FOREG=1TO52:IFLT$=CH$(EG)TH
ENX3=Ø:CH=Ø:CX=Ø:PLAY"O5":FORY5=
1TO4:PLAY"12;11;1Ø;9;8;7;6;5;4;3
;2;1O-":NEXTY5:PLAY"O5":X1=8:Y1=
172:GOSUB187Ø:A$="LETTER ALREADY
 USED":GOSUB114Ø:EG=Ø:GOTO111Ø:E
LSENEXTEG
1Ø6Ø X1=-8:Y1=1:SP=8:FORX3=1TOLE
N(C$):X1=X1+8:A$=MID$(C$,X3,1):I
FX1>248THENY1=13:X1=Ø
1Ø7Ø IFA$=LT$THENSC(PI)=SC(PI)+V
AL(NB$(X)):CH=1:CW=CW+1:GOSUB114
Ø'**INCREASE SCORE BY NUMBER OF
LETTERS CORRECT***
```

```
28Ø '**************************
29Ø '*****SET UP GRAPHICS******
3ØØ '****  &TITLE SCREEN  *****
31Ø '**************************
32Ø '
33Ø PLAY"T255L255O5"
34Ø PCLS1:X1=Ø:SP=8:FORY=ØTO4:DR
AW"CØS4":Y1=Y*12:A$=M$(Y+1):GOSU
B114Ø:NEXTY:'**DRAW MENU**
35Ø LINE(1,1)-(135,59),PRESET,B:
GET(Ø,Ø)-(136,6Ø),M,G:'**STORE M
ENU**
36Ø PCLS1:CIRCLE(128,12Ø),3Ø,Ø
37Ø PAINT(128,12Ø),Ø,Ø
```

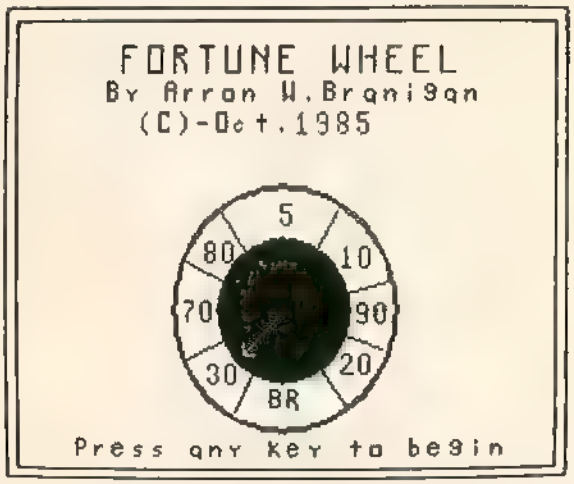


```
38Ø CIRCLE(128,12Ø),5Ø,Ø:CIRCLE(
128,12Ø),51,Ø
39Ø SP=8:FORS=1TO8:READX1,Y1,A$:
NB$(S)=A$:GOSUB114Ø:NEXTS:'***DR
AW NUMBERS ON WHEEL***
4ØØ FORS=1TO8:READX,Y:LINE(128,1
2Ø)-(X,Y),PRESET:NEXTS
41Ø FORS=1TO6:READCAT$(S):NEXTS:
'**READ CATAGORIES***
42Ø LINE(Ø,Ø)-(255,192),PRESET,B
:LINE(5,5)-(25Ø,187),PRESET,B
43Ø DRAW"BM128,12ØC1S5;XA$(1);CØ
"
44Ø FOR X=1 TO 4:PCOPY X TO X+4:
NEXTX
45Ø DRAW"C1S5BM128,12Ø;XA$(1);"
46Ø PLAY"V31O5":PMODE4,1:SCREEN1
,1:X1=51:Y1=12:SP=12:DRAW"S6CØ":
A$="FORTUNE WHEEL":GOSUB114Ø:X1=
45:Y1=27:SP=9:DRAW"S4":A$="By Ar
ron W.Branigan":PLAY"O3":GOSUB11
4Ø:X1=6Ø:Y1=39:A$="(C)-Oct.1985"
:GOSUB114Ø
47Ø X1=3Ø:Y1=172:SP=9:A$="Press
any key to begin":PLAY"O1":GOSUB
114Ø:PLAY"O5":DRAW"S5"
48Ø FORG=1TO8:DRAW"BM128,12ØC1;X
A$(G);":PLAY"BAGFED":DRAW"BM128,
12ØCØ;XA$(G);":IFINKEY$><""THEND
RAW"BM128,12ØC1;XA$(1);":GOSUB25
4Ø:GOTO49Ø:ELSE NEXTG:GOTO48Ø
49Ø DRAW"BM128,12ØC1;XA$(G);":DR
AW"S5":PMODE4,5:LINE(5,5)-(25Ø,1
87),PSET,B
5ØØ SCREEN 1,1:DRAW"S4"
51Ø '
52Ø '**************************
53Ø '********GAMEPLAY**********
54Ø '**************************
55Ø '
56Ø PT=PL
57Ø FORRO=1TORD
58Ø POKE65494,Ø:OPEN "D",#1,"CAT
EGORY",65:'**OPEN FILE**
59Ø FIELD#1,1 AS CT$,64 AS K$
6ØØ SS=Ø:DS=RND(LOF(1)):GET#1,DS
:CAT=VAL(CT$):C$=K$:GY=1
61Ø FORSS=1TORO:IFK(SS)= DS THEN
6ØØELSENEXTSS:'***COMPARE IF FIL
E IS ALREADY USED THIS GAME***
62Ø K(RO)= DS :CLOSE#1:POKE65495
,Ø:'**SAVE FILE FOR FUTURE COMPA
RE**
63Ø TL=Ø:FORTL=64TO1STEP-1:IFMID
$(C$,TL,1)><" "THEN64Ø:ELSENEXTT
L:'**FIND LENGTH OF C$ MINUS BLA
NK SPACES**
64Ø '
65Ø '**************************
66Ø '*  COUNT CONSONANTS      *
67Ø '**************************
68Ø PZ=Ø:CV=Ø:CW=Ø:FORZZ=1TO64:R
$=MID$(C$,ZZ,1)
69Ø IFASC(R$)>65THENIFR$><"A"AND
R$><"a"ANDR$><"E"ANDR$><"e"ANDR$
><"I"ANDR$><"i"ANDR$><"O"ANDR$><
"o"ANDR$><"U"ANDR$><"u"THENCV=CV
+1
7ØØ IFASC(R$)>47ANDASC(R$)<58THE
NCV=CV+1
71Ø NEXTZZ:'**END COUNT CONSONAN
TS**
72Ø PT=PT+1:IFPT> PL THENPT=Ø:'*
**SELECT WHO GOES FIRST EACH ROU
ND***
73Ø PI=PT:E$=""
74Ø PMODE4,5:SCREEN1,1:DRAW"S4":
X1=Ø:Y1=Ø:SP=8:EX=1:A$=STRING$(6
4,CHR$(125)):GOSUB114Ø:PMODE4,1:
SCREEN1,1:CX=1:'**DRAW SQUARES O
N PAGE 5**
75Ø WI=Ø:PI=PI+1:IFPI> PL THENPI
=1
76Ø GOSUB187Ø:IFE$=""THENGOSUB12
```

by the value of the spin multiplied by the number of times the letter appears in the puzzle.

After the final round is played, the computer displays the scores from highest to lowest. If all consonants are shown before the puzzle is solved, the computer asks for the solution to the puzzle. If no one guesses correctly, then it displays SORRY NO WINNERS THIS ROUND and advances to the next round.

Listing 1, *Fortune Wheel*, is the main game. Listing 2 is for creating puzzle and category files for *Fortune Wheel*. When keying in Listing 1 be careful to space it just as it is in the listing. If you don't space correctly, you will get an SN Error. Be sure to type in both listings and save them on disk before using Listing 2 to create the puzzle file. This listing creates direct files and it will write on top of any file or program saved after establishing the puzzle file. This should be a dedicated disk.

This game will only run on a 64K Extended BASIC machine. It uses direct access files so it works only with a disk drive. If you want to use it with a cassette, you need to modify lines 580 through 620.

I have used the speed up and slow down pokes (POKE 65495,0 and POKE 65494,0) in several places in the program. I found that you must use them in lines 580 and 620 because these lines are in the retrieve record routine.

One final note on Listing 1: In the alphabet DATA lines, I have created a data record for the computer to draw every alphabet character (true upper- and lowercase) and all the punctuation characters on the keyboard. So when using Listing 2 to create puzzle and category records, feel free to use lowercase letters and punctuation.

When you load and run the program, a menu appears giving the options to Create Records, Correct Record, List Records and End. When creating records, the computer enters a short word processing routine that allows you to type in a puzzle record up to 64 characters long. Once the record is the way you want it, press ENTER. The Enter Category menu pops up giving the choice of phrase, title, place, person, president and Bible phrase for categories.

If you choose the Correct Record option from the first menu, the computer asks you to enter the number of the record you want and retrieves the record so you can correct it. After all corrections are made, press ENTER and the Enter Category menu pops up again for you to enter the record category.

If you select Option 3 (List Records) the computer asks if you want a hard copy. Next it asks you to ENTER RECORD:START,END. Just enter the number for the first then the last record to be listed. The computer will list the records on the screen and printer.

(You may direct any questions about this program to Mr. Branigan at 105 Briarfield Cove, Jacksonville, AR 72076, 501-982-6067. Please enclose an SASE when writing.) □

180	71	1360	169
370	184	1540	99
490	10	1670	20
660	50	1880	88
770	216	2130	49
870	91	2220	199
990	226	2310	165
1060	205	END	136
1260	26		

Listing 1: WHEEL

```
1Ø '****************************
2Ø '**      FORTUNE WHEEL      **
3Ø '**     (C)-OCT.1985        **
4Ø '**  BY:ARRON W.BRANIGAN    **
5Ø '****************************
6Ø '
7Ø CLEAR 1ØØØ:PCLEAR8:DIM L$(94)
,M(15,15),CH$(56):PT=1:GOSUB13Ø:
GOTO16Ø
8Ø '
9Ø ' ***************************
1ØØ '** PLAYER INPUT ROUTINE  **
11Ø '***************************
12Ø '
13Ø CLS(RND(8)):PRINT@224,"";:IN
PUT"ENTER NUMBER OF ROUNDS 1-1Ø"
;RD:IFRD1ORRD>1ØTHEN13Ø
14Ø CLS(RND(8)):PRINT@224,"";:IN
PUT"ENTER NUMBER OF PLAYERS (1Ø
MAX)";PL:IFPL<1ORPL>1ØTHEN14Ø
15Ø CLSRND(8):FORX=1TOPL:PRINT"E
NTER PLAYER";X;"S NAME";:INPUTN$
(X):NEXTX:RETURN
16Ø CLS(8):PRINT@224,          "
      PLEASE WAIT WHILE
      I CREATE GRAPHICS   ":SCR
EENØ,1:PMODE4,1
17Ø POKE65495,Ø
18Ø L$(92)="BD12R8":L$(93)="C1BD
12R8CØ":'***BUILD UNDERLINE STRI
NG**
19Ø '
2ØØ '****************************
21Ø '**LEARN ALPHABET & ARROWS**
22Ø '****************************
23Ø '
24Ø FORX=1TO8:READA$(X):NEXTX:FO
RX=1TO91:READL$(X):NEXTX:FORX=1T
O5:READM$(X):NEXTX:A$(Ø)=A$(8):L
$(94)="C1BD1D12R1U12R1D12R1U12R1
D12R1U12R1D12R1U12CØL8D12R8U12"
25Ø B1$=L$(1):BK$="CØ"+MID$(L$(1
),3,LEN(L$(1)))
26Ø '**END LEARN ALPH & ARROWS**
27Ø '
```

Fortune Wheel

This challenging game provides fun and excitement for the whole family

By Arron W. Branigan

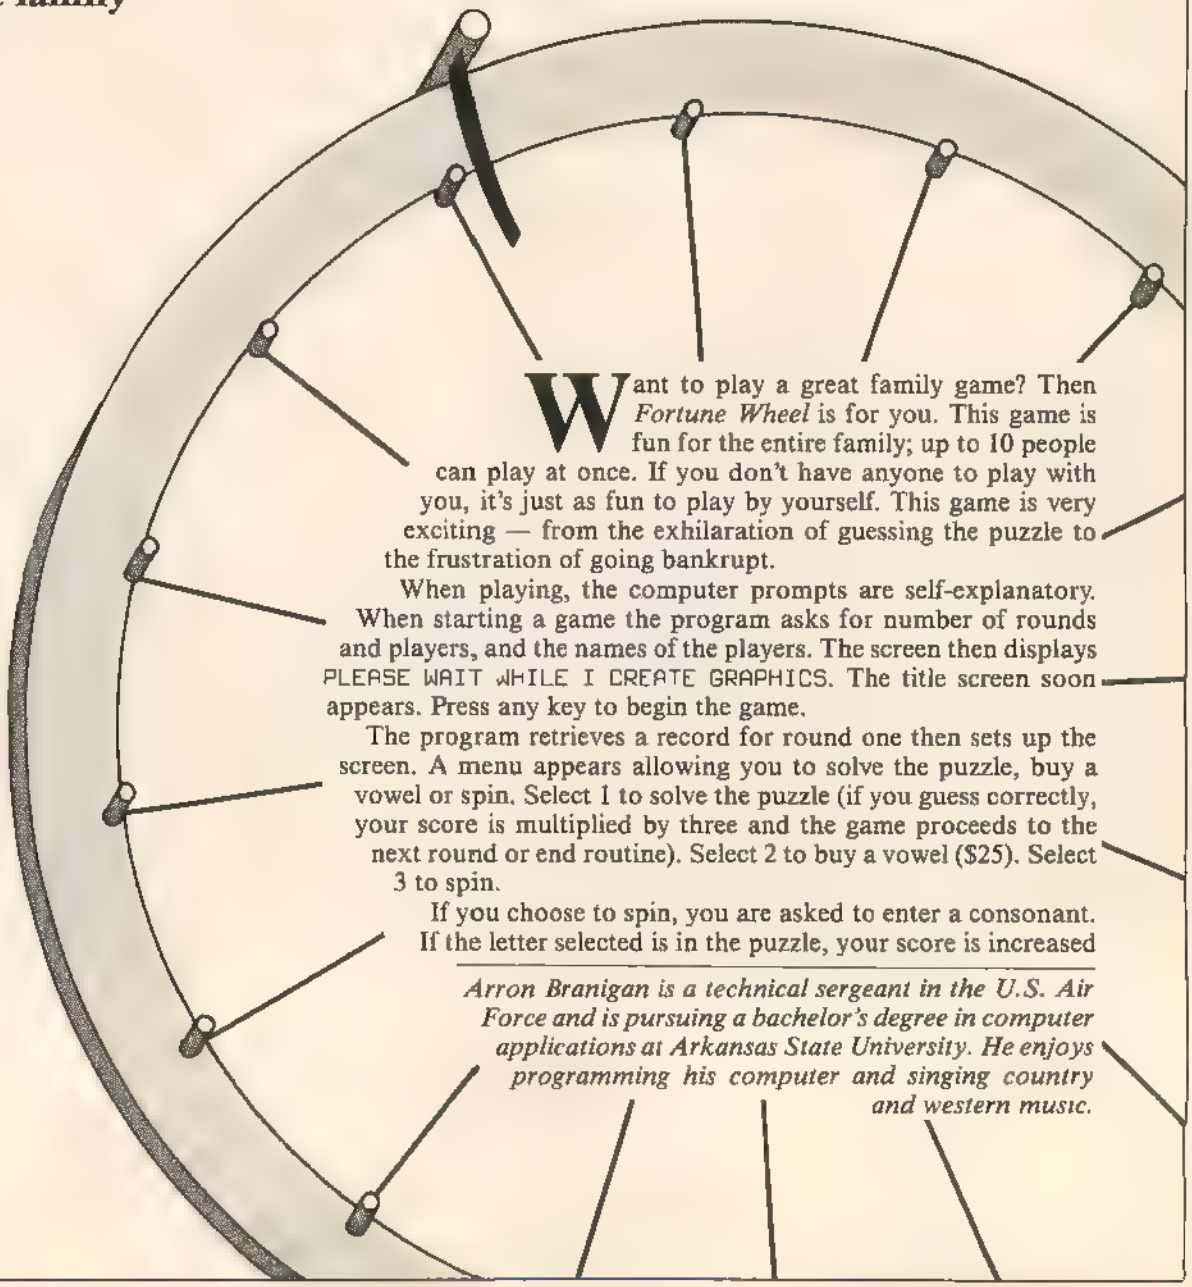

Want to play a great family game? Then *Fortune Wheel* is for you. This game is fun for the entire family; up to 10 people can play at once. If you don't have anyone to play with you, it's just as fun to play by yourself. This game is very exciting — from the exhilaration of guessing the puzzle to the frustration of going bankrupt.

When playing, the computer prompts are self-explanatory. When starting a game the program asks for number of rounds and players, and the names of the players. The screen then displays PLEASE WAIT WHILE I CREATE GRAPHICS. The title screen soon appears. Press any key to begin the game.

The program retrieves a record for round one then sets up the screen. A menu appears allowing you to solve the puzzle, buy a vowel or spin. Select 1 to solve the puzzle (if you guess correctly, your score is multiplied by three and the game proceeds to the next round or end routine). Select 2 to buy a vowel ($25). Select 3 to spin.

If you choose to spin, you are asked to enter a consonant. If the letter selected is in the puzzle, your score is increased

Arron Branigan is a technical sergeant in the U.S. Air Force and is pursuing a bachelor's degree in computer applications at Arkansas State University. He enjoys programming his computer and singing country and western music.

The Educational Answers

SCIENCE GAME
32K EB - disk only/$29 95
Over 600 questions in 9 categories Makes learning science facts fun. Game format, 1 or 2 players, teams. Grade 8 and up.

STREET MAP GAME
32K - $19.95 tape/$24.95 disk
Hi-res. screen and graphics portray a typical section of a street map. This one shows people's homes, the school, the park, etc. Questions on how to get from one place to another are asked and the footsteps are shown

CHEMISTRY TUTOR
32K - disk only - $29 95
A hi-res. 4 part program that drills high school students in Elements, Symbols, Naming Compounds, Common Ions, and Balancing Equations. Correct answer given after 2 incorrect responses. A valuable tool for studying chemistry.

5 LIGHTPEN PROGRAMS
32K EB - $44.95
Five menu driven educational programs designed for children in grade 1 and 2, and special educational students. Basic addition, basic multiplication, shape series matching, number series matching and word rhyming are included. All on a HI-RES screen, with graphics. User need only to use the light pen to operate the programs **(LIGHT PEN INCLUDED)**

VERBAL MATH PROBLEMS

PIZZA GAME
32K EB - tape/$19.95
Learn to locate coordinates on a grid. HI-RES text and graphics.

AREA & PERIMETER
32K EB - tape/$19.95
Triangles, rectangles, and circles are covered in this HI-RES text and graphics program.

SALES & BARGAINS
32K EB - tape/$19.95
Learn to find the discounted price. HI-RES text and beautiful graphics.

DISTANCE PROBLEMS
32K EB - tape/$19.95
Moving graphics and text combines on a HI-RES screen. Rate x Time = Distance in all its forms.

STREET MAP GAME **32K E.B.**
$19 95 Tape **$24.95 Disk**
Hi - res screen and graphics portray a typica section of a street map. This one shows people's homes, the schoo , the park, the post office, etc. Questions are asked on how to get from one place to another and the foo tsteps are shown after response. A fun way to improve map ski ls.

OPENING A BANK ACCOUNT
32K - Disk Only - $24.95
A set of programs designed to introduce and provide practice in the skills of filing out bank applications, deposit and withdrawal slips, and computing bank account balances. Loaded with graphic presentations. Grades 3-6

$$$

DOLLARS & SENSE
16K-Ext. - $14.95 tape/$19.95 disk
Learn to make purchases. Graphic displays of items kids love. Player buys items using dollars and coins to practice using money correctly. Solutions given.

McCOCO'S MENU
16K-Ext. - $19.95 tape/$24.95 disk
America's favorite pastime-going out to eat. Learn to buy and add up your purchases from a typical fast food restaurant menu. Gain skill in using money. Different prices each time.

COCO WHEEL OF FORTUNE
32K - $19.95 tape/$24.95 disk
Hi-res. graphics and screen in this version of the popular TV show. 1-6 players. Spin the wheel for points and guess a letter to solve one of the 200 puzzles. Have fun while strengthening LA skills.

COLORGRADE
32K - disk only - $29.95
An easy to use classroom grading program. Keeps grades for up to 6 classes of up to 40 students per class. Many options including weighted averages and hard copy to printer.

RAINBOW CERTIFICATION SEAL

Computer Island

(718) 948-2748

VISA

Dept. R 227 Hampton Green, Staten Island, N.Y. 10312

MasterCard

Send for catalog with complete descriptions.

Please add $1 00 per order for postage. N.Y. residents, please add proper tax. FREE set of BINARY DICE, including full directions, with orders of 2 or more items.

Dealer Inquiries Invited.

TRS-80 Color Computer

All Payments in U.S. Funds.

Computer Island Educational Software

227 Hampton Green, Staten Island, New York 10312

(718) 948-2748

PROGRAM TITLE	GRADES	MEMORY	PRICE
PRESCHOOL			
Preschool I - counting	Pre-K	16K Ext	11.95
Preschool II - adding	Pre-K	16K Ext.	11.95
Preschool III - alphabet	Pre-K	16K Ext.	11.95
Music Marvel-play songs	Pre-K,1	16K-Ext.	11 95
Arrow Games - 6 games	Pre-K,1	32K-Ext.	21.95
First Games - 6 games	Pre-K,1	32K-Ext.	24.95
Mr. Cocohead-facemaker	K-3	16K-Ext.	16 95
Bentley Bear	Pre-K	32K-Disk	29 95
LANGUAGE ARTS			
Beyond Words 1-3 parts	3-5	32K-Ext.	19 95
Beyond Words 2-3 parts	6-8	32K-Ext	19.95
Beyond Words 3-3 parts	9-12	32K-Ext.	19.95
Vocabulary 1-1000 words	3-5	32K-Ext.	19.95
Vocabulary 2-1000 words	6-8	32K-Ext	19.95
Vocabulary 3-1000 words	9-12	32K-Ext.	19.95
Context Clues	4,5,6,or 7	16K-Ext	17 95
Cocojot - jotto game	3-up	16K	11.95
Reading Aids - 4 parts	2-4	16K-Ext.	19.95
King Author - writing tool	2-6	16/32 Ext.	29.95
Cocowheel of Fortune	4-up	32K-Ext	19.95
Context Clues	2-3	32K-Ext.	19 95
FOREIGN LANGUAGES			
French Baseball-200wds.	4-up	16K-Ext.	11.95
French Baseball-500wds.	4-up	32K-Ext	19.95
Spanish Baseball-200wds	4-up	16K-Ext.	11 95
Spanish Baseball-500wds	4-up	32K-Ext.	19.95
Italian Baseball-200wds.	4-up	16K-Ext.	11.95
Hebrew Alphabet	beginners	16K-Ext	11.95
Hebrew Utility	drawing utility	16K-Ext.	15.95
CRITICAL THINKING PROBLEMS			
Memory Castle-Sunburst	4-up	32K-disk	44.95
Factory by Sunburst	4-up	32K-disk	44 95
Pond by Sunburst	2-up	32K-disk	44.95
Teasers by Tobbs-Sunb.	4-up	32K-disk	44.95
Inner City - simulation	7-up	32K-disk	49.95
Find The Math Sequence	4-up	32K-Ext	19.95
Stranded-graphic advent.	4-up	32K-disk	24.95
TEACHER/STUDENT AIDS			
Colorgrade - gradebook	Adult	32K-disk	29.95
Quizmaker - write quizzes	5-up	32K-Ext.	24.95
ETT typing tutor (CocoWarehouse)	4-up	16K-Ext.	21.95
The Puzzler (ColorConnection)	4-up	32K-disk	29 95

PROGRAM TITLE	GRADES	MEMORY	PRICE
MATH			
Opening a Bank Account	4-7	32K-disk	24.95
Dollars & Sense	2-4	16K-Ext	14 95
McCoco's Menu	3-5	16K-Ext.	14 95
Moneypak	2-5	32K-Ext.	24.95
Graph Tutor	3-7	32K-Ext.	19 95
Graph-It	7-up	16K-Ext.	14.95
Math Invaders	1-8	16K-Ext	17 95
Mathquiz - 4 operations	2-5	32K-Ext.	19 95
Addition & Subtraction	2-3	16K	11.95
Skill Tutor Series			
Division Tutor	3-7	16K-Ext.	14.95
Multiplication Tutor	3-7	16K-Ext.	14 95
Factors Tutor	5-8	16K-Ext	19 95
Fractions Tutors (3 programs) addition, subtraction or multiplication	4-8	16K-Ext.	19 95ea
Trigonometry	8-10	32K-Ext.	24.95
Equations Linear	7-9	32K-Ext.	19.95
Equations Quadratic	8-11	32K Ext	19 95
Arith. Diagnostic Disk	3-8	32K-disk	49.95
Fraction Diagnostic Disk	4-9	32K-disk	49 95
Verbal Problems Series			
Distance Problems	5-8	32K-Ext.	19.95
Area & Perimeter	5-8	32K-Ext.	19.95
Pizza Game	3-5	32K-Ext.	19 95
Sales & Bargains	6-8	32K-Ext.	19 95
Comparison Shopping	4-7	32K-Ext.	19 95
Binary Dice Game	4-up	32K-Ext.	19.95
SOCIAL STUDIES			
Know Your States	5-up	32K-Ext.	19.95
History Game	5-up	32K-Ext.	14.95
States & Capitals	5-up	32K-Ext.	19.95
Explorers & Settlers	4-up	32K-Ext.	19.95
Famous American Women	6-up	32K-Ext	19.95
Street Map Game	3-5	32K-Ext	19.95
MISCELLANEOUS			
Name That Song 1,2,or 3	2-up	16K-Ext	11 95
Music Drill	3-up	16K-Ext.	19 95
Science Game	8-up	32K-disk	29 95
Computer Literacy	6-up	32K-Ext	19 95
5 Educational Programs with Lightpen	1-2 or 3-6	32K-disk	44.95
Chemistry Tutor	10-up	32K-disk	29 95

Disk indicates available on disk only.
Tape prices given.
Add $5.00 for any program on disk.

Computer Island

can also be used to set up custom reports, print mailing labels, etc. The limits seem only to be in the user's ability to program in BASIC. Action templates could even be used on data files created by other programs if the user has sufficient experience.

One of the other major differences between *CoCo Base I* and other database managers is *CoCo Base I*'s ability to create and execute batch files. These are created using Schedule and executed using Jobs. Schedule creates a job file of Action templates. Schedule allows the user to specify the templates to be used as well as the order and type of execution of these templates. For example, a report could be produced by using one template to print a header, the next to find, format and print a list of selected records, and a third to print a footer and totals. Templates can be executed once, once for each record in order, or once for each record in indexed order. Since templates can contain many lines of BASIC code, each one can be quite complex.

Two final options are of interest to those who need to construct new databases from old ones, those who want to create very complex databases, or those like me who invariably enter large amounts of data into a database before they realize that the data structure is wrong. Transfer creates a new database which includes data from an existing database file. Additional fields can easily be included in the new database format, so additional fields can be added to a database. This feature alone could save countless hours of aggravation and programming. I always seem to need just one more field in any database I create after it is in use.

Update gives *CoCo Base I* its claim to being a relational database manager. Update does not access several different related data files at once. Instead it moves selected fields from one data file to another. This requires that each of the files has a field common to the other. Update places fields in the correct record in the receiving database by looking at this "related field." Of course only one related field is used.

This ability to combine data from several data files is useful for a number of things. To me, the most important use is in keeping individual files short and combining information from different files later when the combined information is needed.

If you get the feeling that I am impressed with *CoCo Base I* you are correct; it fits my needs quite well. However, it has a few problems. First is error handling. There are instructions in the manual that tell you what to type in case of an error. This works and is adequate, but it is inelegant. There should be some way of trapping errors before they dump the user back to the OK prompt. Another annoyance was with *CoCo Base I*'s inability to allow a record to be removed from a database. There are many times when a user would like to delete a record from a file. *CoCo Base I* does not allow this in a simple way.

The last complaint has to do with nearly every database management system I have used. I have to keep telling the program the name of the files I am working on. I realize that this is the price one pays for having the ability to store different versions of each file, index, etc., but I still find it a nuisance. Unfortunately, if this "problem" is fixed it would have to be at the expense of flexibility. Given the choice, I'll vote for flexibility.

The last comment I have is not so much a complaint as a suggestion to potential *CoCo Base I* users. Learn BASIC Although *CoCo Base I* can be used by any non-programmer, the power of the program is best released by someone familiar with BASIC. You could learn BASIC as you go, but previous knowledge is extremely helpful. At first the program may seem weak or difficult to use, but after some practice I find that it can do a great many powerful and useful things.

(JTJ Enterprises, P.O. Box 110841, Nashville, TN 37211, disk $49.95 plus $2 S/H)

One-Liner Contest Winner . . .

This little one-liner produces some interesting graphics designs. It is almost kaleidoscopic.

The listing:

```
Ø IFT=1THENX=9*RND(8):FORI=1TO58
STEP2:A=2Ø9-X-I:B=258-X-I:C=49+I
:PUT(X+I,I)-(X+C,C),D,NOT:PUT(X+
I,148-I)-(X+C,99-I),D,NOT:PUT(A,
I)-(B,C),D,NOT:PUT(A,148-I)-(B,9
9-I),D,NOT:NEXT:GOTOØ:ELSEPMODE4
,1:SCREEN1,1:PCLS1:DIMD(Ø,98):GE
T(Ø,Ø)-(5Ø,5Ø),D,G:T=1:GOTO
```

Rob Weinberg
San Francisco, CA

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

Co Co - Cooler

- Brings operating temperature to ambient, regardless of accessory load
- Reduces temperature of ENTIRE computer . . . not just the SAM chip
- Easy 1-minute installation
- $44.95

Companion Keyboard Cover $9.95

Send For Free Catalog Of Co Co Software & Computerware

- For Fastest Service Send Money Order Or Certified Check
- Add $2.50 Shipping For Continental U.S.
- Add $4.00 Shipping For: AK, HI, APO's, P.O. Boxes, & Canada
- Add $15.00 Shipping For Overseas
- Add $3.00 For 220-250 Volt Model
- California Residents Add 6½% Sales Tax
- Add $3.00 For C.O.D.

REM Industries, Inc.
9420 "B" Lurline Ave., Chatsworth, CA 91311
(818) 341-3719

Powerful *CoCo Base I* is Full of Surprises

By D. McGarry

CoCo Base I is the latest offering from JTJ Enterprises of Nashville, Tennessee. I mention this because there is a strong family resemblance between *CoCo Base I* and *CoCo Solver*, JTJ's other product. Several neat programming tricks were included in both programs and both use the same machine language data entry editor. *CoCo Base I* stands on its own as a good, solid database program. If, however, you own and use *CoCo Solver* you will be able to extract maximum performance and flexibility from *CoCo Base I* with less effort than someone with no prior experience. Several features help *CoCo Base I* to stand out from the crowd of other database management systems. First, *CoCo Base I* is a relational database manager. This means that it can access more than one data file by referencing a field common to all files. Second, through the use of Jobs and Schedule options it allows the processing of batch files. Third, the Action option allows for the inclusion of BASIC statements to manipulate data.

CoCo Base I comes on an unprotected disk which includes 10 program files and several sample files. All work is started by typing RUN "MENJ" at the OK prompt. Menu options are Create, Put, Index, Action, Schedule, Jobs, Transfer and Update.

The first step in creating a database is to use the Create option to create a structure file of the data fields. Each field is given a two-character name, description, length and type. Field types can be either character or numeric. The structure file can be edited at any time and can extend over several screen pages allowing for large or complex records.

Once the structure file is saved, the Put option is used to add, edit, find and print records. Put uses the structure file defined with Create to show records and for data entry. Put can use an existing file or create a new one as records are added. This allows the creation of several database files which all use the same data format.

The next option is Index which does exactly what the name implies. Index files can be saved with their own names, so several index files can exist for the same data file.

Up to this point, *CoCo Base I* looks and acts similar to most database management systems. The additional options make *CoCo Base I* different from any other database manager I have used.

The most unusual and powerful uses of *CoCo Base I* start with the Action option. Action allows the creation of template files which can act on the database. Templates are sets of BASIC language statements that are added to the Action program as it runs. Action statements can be used to do nearly anything to the data file as far as I can tell. I used Action templates to average a set of grades for one of my physics classes. The grades each had a weighting factor. Some of the grades were numeric and some alphabetic. Even though it took some experimentation to get the template correct, Action allowed me to do this job more quickly than any other method I have used. Action

TANDY COMPUTER DISCOUNTS

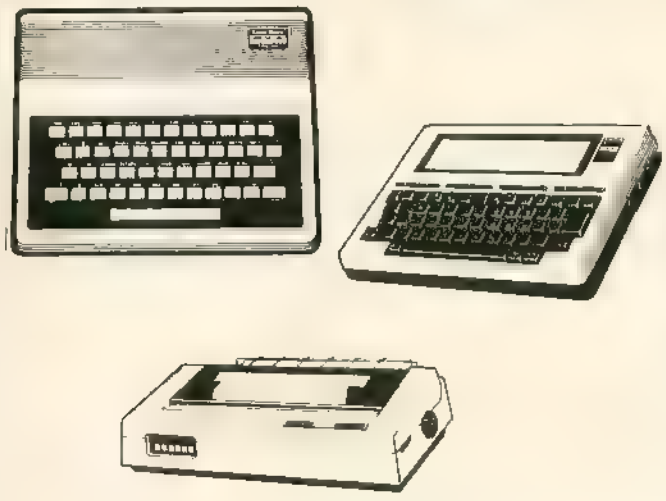

COLOR COMPUTERS

26-3127 64k color comp	165.00
26-3131 1st d sk dr ve	269.95

PRINTERS

26-1276 DMP 105	160.00
26-1277 DMP-430	660.00
26-1278 DWP-220	369.00
26-1280 DMP-130	269.00

MODEL 4 and MSDOS COMPUTERS

25-1000 mod 1000	700.00
25-1004 128K memory board	169.95
25-1005 2nd drive mod 1000	160.00
25-1020 VM-4 Monochrome monitor	125.00
26-1070 mod 4D 64k 2dr	920.00
26-5103 mod 2000 2dr	1,400.00
26-5104 mod 2000 HD	2,200.00

We Carry the Complete Line of Tandy Computer Products at Discount Prices

CALL FOR A FREE PRICE LIST 800-257-5556

IN N.J. CALL 609-769-0551

WOODSTOWN ELECTRONICS

Rt. 40 E. WOODSTOWN, N.J. 08098

CoCo Keyboard Beats the Chiclets

Imagine . . . could someone actually like the "chiclet" keyboard on their 'F' board CoCo? I did. I was accustomed to using that keyboard and I can hunt and peck with the best of them. Well, all that changed when I received my review assignment for the replacement keyboard offered by Spectrum Projects.

I received the keyboard and immediately installed it in my Color Computer. The documentation was brief and appeared incomplete. Nevertheless, replacing a keyboard is perhaps one of the easiest upgrades to perform on a CoCo. To make it even easier, the keyboard is the same as the 26-3016 keyboard retailing for $24.95 at Radio Shack (less installation). This means there is no cutting or soldering involved at all.

Simply open the case (keep in mind this voids your warranty), unplug the old keyboard, plug in the new one and close the case. That's all there is to it. After that, you have a keyboard with full-size keys and a better overall feel.

I found it very easy to get used to the new keyboard. Particularly since the key placement is the same as on my old one, but the new keyboard feels better and typing goes a lot smoother. Even touch-typists should like this keyboard more than some others on the market.

The keyboard is designed to fit into any revision of Color Computer from the old 'F' board to the present CoCos. The cable is the transparent, super-thin mylar conductor type. If you have a version earlier than the 'F' board, Spectrum also sells an adapter that allows you to easily install the keyboard in your computer as well. Keep in mind, if you have one of the newer CoCo 2s this is the same keyboard you already have.

I highly recommend this keyboard for anyone and everyone. Its low cost as well as ease of installation make it one of the best upgrade buys on the CoCo market today.

(Spectrum Projects, Inc., P.O. Box 21272, 93-15 86th Drive, Woodhaven, NY 11421, keyboard $14.95, adapter $9.95, plus $3 S/H)

— Vic Roberts

One-Liner Contest Winner . . .

Here's a little disk utility for your toolbox. Just enter the track, sector and drive numbers at the prompt and you will be able to examine the disk.

The listing:

```
1 CLEAR 3ØØ:INPUT"TRACK:";T:INPU
T"SECTOR:";S:INPUT"DRIVE:";D:DSK
I$ D,T,S,A$,B$:PRINT A$;B$:RUN
```

Anton Sipos
Los Angeles, CA

(For this winning one-liner contest entry, the author has been sent copies of both *The Rainbow Book of Simulations* and its companion *The Rainbow Simulations Tape*.)

Hardware Review

No Frills U-Buff is an Excellent Value

As much as we hate to admit it, the present-day world puts much emphasis on time. Hurry this and hurry that; it is as if we were in a race to the finish! Well, the U-Buff printer buffer from Digital Devices fits in nicely.

I have given this little gem a thorough run for its money. Over the last month and a half, I have sent it files from Delphi, files from my word processor, data from my BASIC programs and graphics. It hasn't let me down yet. It has always printed each character reliably.

For those who don't know, a printer buffer is nothing more than a go-between. It goes between your computer and printer. A printer is limited in speed. The print head can only move so fast across the page. However, a computer can send data much faster. So the buffer allows the computer to finish sending its data more quickly. Therefore, you don't have to wait all day for the printer to finish before going ahead with your work.

As an example, when I told my system to print a 40.5K file, the prompt was back on the screen in 83.5 seconds. I was already involved in my favorite game when my printer finished printing out the 30 double-spaced pages 15 minutes and 53 seconds later

The U-Buff is available in two configurations: 16K memory and 64K memory. A nice added feature is the average user can upgrade the unit from 16K to 64K by himself. The manual gives information on what chips to buy and how to install them properly. The only drawback is that the one-year warranty only applies to the configuration purchased from Digital Devices. Still, I believe this is very reasonable.

The buffer is designed to accept input from any computer having a Centronics interface. Since my serial/parallel converter terminates in a Centronics plug, I had no problems. The unit also terminates in a Centronics plug for the printer's parallel port.

The U-Buff comes with a 14-page, easy to read pamphlet. The instructions cover installation, testing, troubleshooting, upgrades and a whole slew of technical information plus a glossary.

Despite its usefulness, keep in mind a printer buffer isn't for everybody. But anyone with a business or who does a lot of printing will surely welcome anything to help them out.

The U-Buff is an excellent, no-frills printer buffer. For the reasonable price it is a good work horse with a good deal of backing from the manufacturer. This one gets four stars.

(Digital Devices Corporation, 430 Tenth St., Suite N205, Atlanta, GA 30318, 16K $119.95, 64K $149.95)

— Cray Augsburg

formatter we published recently, or the *TSWord* formatter. The *DeskMate* editor is very easy to use and a nice way to enter text. Add the dot commands required by *TSWord* or other formatter and you can print it in any way you like

Many people also like *TSEdit*. It is based on the UNIX VI text editor and does an excellent job. The only reason I haven't bothered to use it is the fact that my fingers already have the *DynaStar* diamond memorized. I would hate to have to learn to touch type all over again. Yet, a friend of mine really likes *TSEdit*. He learned to touch type on *TSEdit* first. He enjoys working with the *TSWord* formatter but he has discovered one problem. I have confirmed the problem but still haven't figured out a solution. If you come up with one, please let me know.

Since memory is limited, divide the writing into shorter files and use *TSWord*'s .NX command. That's fine. In fact, it's a good way to work, even if you don't need to. Unfortunately however, *TSWord* breaks to a new page every time it hits an .NX command. What we need is a way to disable this page break so we can print continuously one page after the other. Here's an example you can use to print three individual files at one time.

```
.nx part_one
.nx part_two
.nx part_three
```

Many people on the CoCo SIG forum seem to believe *DeskMate* files are not compatible with other OS-9 programs. Not so. The secret can be uncovered in the documentation for the terminal program in *DeskMate*. The *DeskMate* editor automatically adds an extension, .DOC, to the end of the filename. Therefore, if you save a file named "Column" it will actually be named "Column.DOC." Save a *DeskMate* file then exit and run the *dir* utility. Then, go ahead and list or dump the file using the complete filename. It worked, didn't it?

The reverse is also true and you could build a file and then edit it with the *DeskMate* editor if you give the file you are building a .DOC extension. For example:

```
OS9: build Example.DOC <ENTER>
```

While we're still talking about *DeskMate*, we should clear up another point. The *DeskMate* terminal program requires you to use the Deluxe RS-232 Pak. You cannot use the /T1 port on the back of the CoCo. Again, bit banging just doesn't work in a multi-tasking environment. If it did, the *DeskMate* programmers would have provided the option to change it. They clearly state that you need the hardware ACIA in the *DeskMate* manual.

Good News for Graphics Programmers

Eric at ColorVenture Software, P.O. Box 1729, Huntington Station, NY 11746 needs a good graphics programmer for an exciting CoCo project. He has been negotiating with Broderbound Software about porting *The Print Shop*, a best-selling program on the Apple and Commodore to the Color Computer. He wants to market it to Tandy, so it must be done in OS-9. Here's your chance! Give him a call at 516-271-8456.

The CoCo/IBM Connection

Many people use an IBM PC or clone at work these days. That's the bad news. The good news is that we can now work at home on our Color Computers, save our efforts on an IBM-compatible disk and carry it to work. In fact you can often get a lot more work done when you get away from the constant interruptions of the workplace.

We owe our new freedom to James Hornsby, who has developed a set of utilities to let you read or write standard Radio Shack DOS single-sided disks as well as standard IBM PC single-sided disks. They use Dan Johnson's Color Computer OS-9 SDisk driver and can also read and rename files on double-sided IBM PC disks. Since they run in OS-9 they also let you send OS-9 files to either Disk BASIC and IBM PC disks, or vice versa. They are most useful for transferring standard ASCII data files. Additionally, if you save a BASIC program in ASCII and transfer the file to the other computer, it should load without a problem.

Sequential ASCII text files from Disk BASIC load into IBM PC editors without a hitch, although you have to add line feeds after each carriage return when using some editors. When you move ASCII text files from an IBM to the Color Computer, you must strip off the extra linefeeds. Hornsby gives you two utilities, *addlf* and *striplf*, to take care of these jobs.

All of Hornsby's utilities use OS-9's standard input and output path. This means their output can be redirected to a file or used in a pipeline. If you avoid using pipes, you can even run these transfer utilities on a single-drive system. A typical single-drive command looks like this:

```
OS9: RSread -s #1ØK /dØ/filename.dat
  >/dØ/documents/myfile
```

Here is a typical command line that uses a pipe.

```
OS9: RSread /d1/filename.ext ! addlf
```

When you run this command, RSread reads data from a standard Color Computer disk and writes it to OS-9's standard output path. But the pipe, noted by the exclamation mark (!) diverts this output to the input of the next program in the pipeline, *addlf*. The latter command adds a linefeed after every carriage return and sends its output to OS-9's standard output path. Since there are no more pipes and the standard output has not been redirected, the output of *addlf* appears on the terminal. Programs that work like *addlf* and *striplf* are called filters.

To copy a file to an IBM disk use a command line similar to this:

```
OS9: PCWrite /D1/letter.txt
  </dØ/letters/myletter
```

Notice that PCWrite gets its input from a file named myletter, in a directory named letters on a disk mounted in Drive /d0. It does that because the standard input path it reads has been redirected to receive information from the file. It stores the file letter in an IBM file named letter.txt on a disk mounted in Drive /d1.

In addition to the standard read and write operations, you can also format IBM disks and delete or rename IBM files with additional utilities in the package. Be careful with IBM filenames containing the characters special to the OS-9 Shell — |, # and &. You can only access files stored in the root directory of an IBM disk that uses hierarchical directories.

This Month's Listings

Gregory A. Law, who has contributed several OS-9 tips in the past, has contributed his version of Dennis Derringer's *Pager.B09*. The program first appeared in MOTD several months ago. Law modified the program to make it print 66 lines per page, rather than 67 and taught it to recognize a second procedure in the source code. When the new *Pager.B09* encounters an additional procedure, it skips to the next page and changes the header on the page to the name of the new procedure. The page numbering remains intact. He also corrected the way the program handles line numbers. Additionally, it prompts for an output device so you can use any parallel printer or even /TERM. Law challenges you to come up with a way to handle a BASIC09 program line in the form of:

```
IF variable=data THEN
  variable=null \ ENDIF
```

Presently, *Pager.B09* treats the rest of the program following this line as if it were still in the IF loop. In other words, *Pager* only recognizes control structure keywords when they are at the beginning of a line.

And here's another tip. Why not write this program so that it receives input from standard input and sends output to standard output. If you do this, you could use it as a filter. To make *Pager.B09* read from the standard input path, take out this line and the conditional code following it:

```
INPUT "File to list: "filename
```

To make *Pager B09* send output to the standard output path, you must make similar changes. Take out the prompt for the output device and the code that uses it. Then, remove the following four lines:

```
OPEN #path, filename:READ
OPEN #printer,output:WRITE
CLOSE #path
CLOSE #printer
```

Then, early in the program add the following two lines:

```
path:=Ø
printer:=1
```

After you do this, the program gets input from the standard input path when it encounters the line, "READ #path, line". Likewise, it sends output to the standard output path when it encounters any line containing "print #printer".

Run *Pager.B09* with OS-9 command lines like this:

```
OS9: basic09 Pager
 <any_BASIC09_file >/P
OS9: basic09 Pager
 <more BASIC09_Source >a_spooler_file
OS9: basic09 Pager
 <any_BASIC09_Source
```

The first command line sends its output to the printer. The second line saves the output in a file on disk which you can later print, and the last line sends the output to the Color Computer screen.

While you are typing *Pager B09* into the CoCo you will find several program lines longer than the length of the screen. To get around this problem, type a linefeed character and continue to type the program line Remember, do not press the ENTER or RETURN key after you press the linefeed key — just keep typing. To generate a linefeed character on the Color Computer, hold down the CLEAR key and press the 'J' key. BASIC09 will let you enter the long series of IF . . . OR . . . OR . . . THEN statements in *Pager.B09* if you do this. This series appears twice in the listing and both times the three lines of code in the listing should be entered as one line of code.

A New *line.c*

Law also modified the standard *line.c* program that comes with the Microware C compiler from Tandy. The program now paginates the listings at 66 lines per page and includes a header that prints the filename and pager number. He also gives you the ability to add the string "/*page*/" to your own code. When the *line.c* sees this string it automatically skips to the top of the next page. This is a handy feature since it allows a way to add a simple comment to programs to keep a routine from being listed on two pages.

Our final listing this month comes from Matthew Belmonte of Alexandria, Virginia. The listing *stat.a* is written in the RMA assembler format. RMA is the assembler called C.Asm in Microware C. It just might come in handy if you are trying to port C programs from UNIX over to OS-9. The short C program, *example.c*, shows how to use "stat( )" from within your own C programs. To link stat( ) with *example.c*, use the following command line.

```
c.link /d1/lib/cstart.r
 example.r stat.r -0=/d1/
example -l=/d1/lib/clib.l
```

That's it for August! But, never fear, next month should be just as much fun as we try to come up with a way to organize your disks. Till then, keep on hacking! □

Listing 1: ***new.pager***

```
    (* BASIC09 Listing Utility *)
    (* Written by Dennis Derringer *)
    (* Modified by Greg Law *)

    DIM filename:STRING[20]; line:STRING[200]
    DIM temp:STRING[200]
    DIM xline:STRING[60]
    DIM path,printer,page,linecount,tabset:BYTE
    DIM proc:STRING[50]
    DIM output:STRING[5]
    DIM a,start,endpos:INTEGER
    DIM cnt:BYTE

    INPUT "Output device (/P): ",output
    IF output="" THEN
      output:="/p"
    ENDIF

    (* Main Loop *)
10  PRINT CHR$(12)
    PRINT "BASIC09 Listing Pager"
    PRINT "Type 'end' or press [ENTER] to exit"
    PRINT
    INPUT "File to list: ",filename
    IF filename="end" OR filename="END" OR filename="" THEN
      END
    ENDIF

    page:=1
    linecount:=1
    tabset:=10
    OPEN #path,filename:READ
    READ #path,line
    proc:=line
    OPEN #printer,output:WRITE
    GOSUB 100
    WHILE NOT(EOF(#path)) DO
      READ #path,line
      REPEAT
        start:=SUBSTR(CHR$(10),line)
        IF start<>0 THEN
          line:=LEFT$(line,start-1)+" "+MID$(line,start+1,200)
        ENDIF
      UNTIL start=0
      IF LEFT$(line,4)="ELSE" THEN
        PRINT #printer,TAB(tabset-2); line
        linecount:=linecount+1
      ELSE
        IF LEFT$(line,7)="ENDEXIT" OR LEFT$(line,5)="ENDIF" OR
          LEFT$(line ,7)="ENDLOOP" OR LEFT$(line,8)="ENDWHILE" OR
          LEFT$(line,5)="UNTIL" OR LEFT$(line,4)="NEXT" THEN
          tabset:=tabset-2
        ENDIF
        IF LEN(line)>60 THEN
          temp:=line
          xline:=LEFT$(line,60)
          start:=1
          endpos:=61
      REPEAT
        IF start=1 THEN
          a:=tabset
        ELSE
          a:=tabset+2
        ENDIF
        REPEAT
          endpos:=endpos-1
```

```
        UNTIL MID$(xline,endpos,1)=" " OR endpos>LEN(line) OR
          endpos=Ø
        IF endpos=Ø THEN
          endpos=6Ø
        ENDIF
        xline:=LEFT$(xline,endpos)
        line:=MID$(line,endpos+1,2ØØ)
        PRINT #printer,TAB(a); xline
        linecount:=linecount+1
        start:=endpos+1
        endpos:=61
        xline:=LEFT$(line,6Ø)
      UNTIL line=""
      line:=temp
    ELSE
      IF ASC(line)<58 AND ASC(line)>46 THEN
        cnt:=1
        REPEAT
          xline:=LEFT$(line,cnt)
          cnt:=cnt+1
        UNTIL MID$(line,cnt,1)=" "
        line:=MID$(line,cnt+1,2ØØ)
        PRINT #printer,TAB(5); xline; TAB(tabset); line
        linecount:=linecount+1
      ELSE
        IF LEFT$(line,9)="PROCEDURE" THEN
          FOR a=1 TO 65-linecount
            PRINT #printer,CHR$(13);
          NEXT a
          proc:=line
          GOSUB 1ØØ
        ELSE
          PRINT #printer,TAB(tabset); line
          linecount:=linecount+1
        ENDIF
      ENDIF
    ENDIF
    IF LEFT$(line,2)="IF" OR LEFT$(line,6)="EXITIF" OR
      LEFT$(line,4) ="LOOP" OR LEFT$(line,5)="WHILE" OR
      LEFT$(line,6)="REPEAT" OR LEFT$ (line,3)="FOR" THEN
      tabset:=tabset+2
    ENDIF
  ENDIF
  IF linecount>6Ø THEN
    FOR a=1 TO 65-linecount
      PRINT #printer,CHR$(13);
    NEXT a
    GOSUB 1ØØ
  ENDIF
ENDWHILE
FOR a=1 TO 65-linecount
  PRINT #printer,CHR$(13);
NEXT a
CLOSE #path
CLOSE #printer
GOTO 1Ø

(* Subroutine to print page heading *)
1ØØ PRINT #printer," "
PRINT #printer USING "t1Ø,s32,t65,'Page: ',i3",proc,page
PRINT #printer,TAB(1Ø); " Date / Time: "; DATE$
PRINT #printer," "
page:=page+1
linecount:=3
RETURN
```


* LOCAL * IN * LOS * ANGELES *

THE E.D.C. FLIPPY ATTACK!

DON'T RUIN YOUR DISKS!
Highest Quality Certified Diskettes. True Flippies—Already "Doubled". DS/DD 10/$17 95 + $2.50 S & H

2764 Eprom (10)	$4.50 ea.
27128 Eprom (10)	$5.50 ea.
6809E CPU	$17.95
6847 VOG	$17.95
6883 SAM	$24.95
LS785 NEW SAM	$29.95
RS DOS 1.1	$22.95
Ext. Bas. 1.1	$24.95
Est. Bas (28 Pin)	$29.95
4464 DRAM (2 chips)	$34.95
4164 DRAM (8 chips)	$19.95
Model 100 8K Upgrade	$34.95
Gold Rom "Y" Cable	$22.95

Quadrature Fan Module B
Piezo Electric — .11 Watts
Fits IN Coco — No Surge
5 CFM — Low Noise — UL
$29.95 + 2.50 S & H

E.D.C. carries the most complete line of software and hardware in the market.

232 RemotePlus by David Cherin
- *Requires RS232 Pak or PBJ 2SP*
- *Remote Terminal Program*
- *Parallel to Keyboard*
- *No Lost or Garbled Data*
- *Error Trapping ✓ Software Clock*
- *Disable Break Key ✓ Inkey$ Support*
- *New Terminal Program*
- *Conversation Mode*
- *All Ext. & Disk Commands*
- *20 Commands Added*
- *Perfect for BBS*
- *4 Versions Incl: Ext., 1.0,1.1 & JDOS*
- *Much More - Uses 4K*

RAINBOW CERTIFICATION SEAL

$24.95 + 2.50 S & H (CA res. + tax)

VIP Writer/Speller is so good, it doesn't need the ads.....$59.95

Always $2.50 S&H = 1 lb. Can = Call

COLOR & MICRO COMPUTERS
Software ● Hardware ● Support
Educational ● Small Business ● Games
VOICE (213) 254-6809 10 A.M.-10 P.M.
BBS (213) 258-0640 24 HRS.
300 and 1200 Baud
Extended Hours+Call before coming.

6130 YORK BOULEVARD
POST OFFICE BOX 42718
LOS ANGELES, CA. 90042
MAKE CHECKS PAYABLE TO E.D.C.

Listing 2: *line.c*

```
/* line: list lines of file with numbers */

#include <stdio.h>

main(argc,argv)
char **argv;
{
char line[256];
register int count = 0;
int linecount = 1;
int page = 1;
int a;

if(--argc)
if(freopen(*++argv,"r",stdin) == NULL) {
fprintf(stderr,"can't open file: %s\n",*argv);
exit(errno);
}

put_header(*argv, 1);
linecount = 4;
while(gets(line)) {
if(strncmp(line, "/*page*/", 8) != 0) {
printf("%5d  %s\n", ++count, line);
linecount++;
if(linecount > 64) {
for(a = 1 ; a <= 67 - linecount; a++)
printf("\n");
put_header(*argv, page++);
linecount = 4;
}
} else {
for(a=1; a <= 67 - linecount; a++)
printf('\n");
put_header(*argv, page++);
linecount = 4;

}
}
for(a = 1 ; a <= 67 - linecount; a++)
printf("\n");
}

put_header(line, page)
char *line;
int page;
{
printf("\n%-60sPage: %5d\n\n", line, page);
}
```

Listing 3: *stat.a*

```
*stat.a
*C stat() call for OS9
*by Matthew Belmonte
*8602008
READ. equ %00000001
DIR. equ %10000000
 ifp1
 use /D1/DEFS/os9defs.a
 endc
 psect stat_a,0,0,0,0,0
 nam stat_a
 ttl stat
stat:
 pshs u,y
 ldd #-65
 lbsr _stkcheck make sure enough room
 leas -33,s for scratch area
 ldx 39,s pathname argument
 leau ,x points to filename
cpynam lda ,x+
 beq cpdone
 cmpa #'/
 bne cpynam
 leau ,x save addr of last '/'
 bra cpynam
cpdone lda ,u
 sta 1,s save char after the '/'
 lda #'.+$80 parent dir
 sta ,u replace it w/ '.'
 ldx 39,s
 lda #READ.+DIR.
 os9 I$OPEN open it
 sta ,s save dir path desc
 lda 1,s
 sta ,u restore filename
 lbcs error
find   lda ,s
```


S·S·S ***OUTLINER***

SNAP·STUDY·SYSTEM

***UNIQUELY FRIENDLY**, learn in minutes.
***NO FORMS** to set up. Just start entering records. Use ARROW keys to change levels, browse MAIN headings, SUB-headings, ITEMS.
***ADD - REVISE - DELETE** at any level.
***NO FILE NAMES** TO REMEMBER. Just choose a file box (A-H) from the screen listing.
***3 SAMPLE FILES** and examples included.
***PRINT REPORT** (printer codes permitted)
***NOT COPY PROTECTED** ***CLEAR MANUAL**

Best used every day to plan, check, review. Plan an outline for reports, jobs, duties. ideas, things to do. Reference notes for studies, books, checklists etc, etc.

JOBS FILE PARTIAL PRINTOUT
HOME
  HOUSE MAINTENANCE
    Change kitchen washers
    Paint utility room
    Check smoke alarm ****
    Car service MON 9AM
  YARD
    Prune hedge, shrubs
    Gate hinges - fix
    Clean out eave troughs
    Marigolds-seed MAR 1st
ENGINEERING
  PROJECT '200
    Preliminary plan
    Call traffic consultant
      re Tues 8:45 meeting

BE ORGANIZED!

REQUIRE 32K DISK
PRINTER RECOMMENDED

ONLY $19.95
CANADA $25
ADD $2 shipping

COZY SOFTWARE
25142 53RD Ave
ALDERGROVE, B.C.
CANADA V0X 1A0

```
 leax 1,s buffer
 ldy #32 record length
 os9 I$READ directory
 bcs error
 leax 1,s
 leay ,u target filename
cmpnam lda ,x
 anda #%Ø1111111 strip MSb
 cmpa ,y+
 bne find look @ next entry
 lda ,x+
 bpl cmpnam
 lda ,y must be same length
 bne find so check for '\Ø'
 lda ,s
 os9 I$CLOSE directory
 bcs error
 leax device,pcr "@"
 lda #READ.
 os9 I$OPEN
 bcs error
 sta ,s path desc
 ldx 3Ø,s LSN (MS 16)
 lda 32,s LSN (LS 8)
 clrb
 tfr d,u
 lda ,s
 os9 I$SEEK
 bcs error
 ldx 41,s &stbuf argument
 ldy #$1ØØ sizeof(stbuf)
 lda ,s
 os9 I$READ file desc sector
 bcs error
 lda ,s
 os9 I$CLOSE
 bcs error
 ldd #Ø no error
clenup leas 33,s done w/ scratch area
 puls y,u,pc
error clra
 std errno error code
 ldd #-1 error flag
 bra clenup
device fcs "@"
 endsect
```

Listing 4: ***stat.demo***

```
/*a demonstration of the stat() call in OS9
  written by Matthew Belmonte*/
#include <stdio.h>
#include <direct.h>
main()
{
  int i, mask;
  char name[8Ø];        /*pathlist*/
  struct fildes stbuf;  /*inode info*/
  static char attrb[] = ('d','s','e','w','r','e','w','r');
  printf("filename? "); /*prompt*/
  scanf("%s",name);     /*get pathlist*/
  if(stat(name,&stbuf) == -1)  /*call stat()*/
    printf("stat: error!\n");
  else
    {
    printf("\nowned by %d\n",stbuf.fd_own);
    printf("created on %Ø2d/%Ø2d/%Ø2d\n",stbuf.fd_dcr[Ø],stbuf.fd_dcr[1],
stbuf.fd_dcr[2]);
    printf("last modified on %Ø2d/%Ø2d/%Ø2d at %Ø2d:%Ø2d\n",stbuf.fd_date[Ø],
stbuf.fd_date[1],stbuf.fd_date[2],stbuf.fd_date[3],stbuf.fd_date[4]);
    printf("%d links.\n",stbuf.fd_link);
    mask = ØX8Ø;
    for(i = Ø; i != 8; i++)
      {
      if(mask & stbuf.fd_att)
        putchar(attrb[i]);
      else
        putchar('-');
      mask >>= 1;
      }
    }
  }
```

THESE FINE STORES CARRY THE RAINBOW

The retail stores listed below carry THE RAINBOW on a regular basis and may have other products of interest to Tandy Color Computer users. We suggest you patronize those in your area.

ALABAMA
- Birmingham — Jefferson News Co.
- Brewton — McDowell Electronics
- Florence — Anderson News Co
- Greenville — M & B Electronics
- Madison — Madison Books
- Montgomery — Trade 'N' Books

ALASKA
- Fairbanks — Electronic World

ARIZONA
- Phoenix — TRI-TEK Computers
- Sierra Vista — Livingston's Books
- Tempe — Books Etc.
- Tempe — Computer Library
- Tucson — Anderson News Co.

ARKANSAS
- Fayetteville — Vaughn Electronics/Radio Shack
- Little Rock — Anderson News Co.

CALIFORNIA
- Chula Vista — R & R Software
- Citrus Heights — Software Plus
- Grass Valley — Advance Radio, inc.
- Half Moon Bay — Strawflower Electronics
- Hollywood — Levity Distributors
- Hollywood — World Book & News Co.
- Lompoc — L&H Electronics Emporium
- Los Angeles — E.D.C. Industries
- Los Angeles — Polygon Co.
- Sacramento — Tower Magazine
- Santa Rosa — Sawyer's News, inc
- Sunnyvale — Computer Literacy

COLORADO
- Westminster — Software City

CONNECTICUT
- Danbury — Computer Satv of Danbury

DELAWARE
- Middletown — Delmar Co.
- Milford — Milford News Stand
- Wilmington — Normar, Inc.—The Smoke Shop

FLORIDA
- Boca Raton — Software, Software inc
- Cocoa — The Open Door
- Davie — Software Plus More
- Ft. Lauderdale — Electronics Engineers
- Ft. Lauderdale — Mike's Electronics Distributor
- Jacksonville — The Book Nook
- Jacksonville — Book Town
- Jacksonville — Deano's TV
- Melbourne — City Newsstand
- Melbourne — The Little Store
- North Miami Beach — Armar Bookstore
- Orlando — Book Mania
- Panama City — Boyd-Ebert Corp.
- Pensacola — Anderson News Co.
- Pinellas Park — Wolf's Newsstand
- Sarasota — Family Computers
- Sunrise — Sunny's at Sunset, inc
- Tallahassee — Anderson News Co.
- Tampa — Fine Print Bookstore
- Tampa — Sound Trader & Computer Center
- Titusville — Computrac

GEORGIA
- Bremen — Bremen Electronics/Radio Shack
- Cummings — Kent Radio Shack
- Jesup — Radio Shack
- Marietta — Act One Video
- Toccoa — Martin Music Radio Shack

IDAHO
- Moscow — Johnson News Agency

ILLINOIS
- Aurora — Krochs & Brentano's
- Belleville — Software or Systems
- Champaign — Book Market
- Chicago — B. Dalton Booksellers
- Chicago — N. Wabash St
- Chicago — West Jackson St
- Chicago — Bob's in Newtown
- Chicago — Bob's News Emporium
- Chicago — Bob's Rogers Park
- Chicago — Book Market
- Chicago — East Cedar
- Chicago — North Cicero
- Chicago — West Diversey
- Chicago — E.B. Garcia & Associates
- Chicago — Krochs & Brentano's
- Chicago — South Wabash
- Chicago — West Jackson
- Chicago — 516 N. Michigan
- Chicago — 835 N. Michigan
- Chicago — Parkway Drugs
- Chicago — Parkwest Books
- Chicago — Sandmeyer's Bookstore
- Chicago — Univ of Chicago Bookstore
- Chicago — Univ of Illinois Bookstore
- Chicago — Videomat, inc.
- Chillicothe — Book Emporium
- Danville — Book Market
- Decatur — Book Emporium
- Decatur — K-Mart Plaza
- Decatur — Northgate Mall
- East Moline — Book Emporium
- Evanston — Chicago-Main News
- Geneseo — B & J Supply
- Kewanee — Book Emporium
- Lisle — Book Nook
- Newton — Bill's TV Radio Shack
- Oak Brook — Krochs & Brentano's
- Oak Park — Krochs & Brentano's
- Paris — Book Emporium
- Peoria — Book Emporium
- Peoria — Sheridan Village
- Peoria — Westlake Shopping Center
- Rockford — Book Market
- Rockford — Illinois News Service
- Schaumberg — Krochs & Brentano's
- Skokie — Krochs & Brentano's
- Springfield — Book Emporium
- Springfield — Sangamon Center North
- Springfield — Town & Country Shopping Ctr
- Sunnyland — Book Emporium
- West Frankfort — Paper Place
- Wheeling — North Shore Distributors

INDIANA
- Berne — White Cottage Electronics
- Columbus — Micro Computer Systems, inc.
- Garrett — Flinn News Agency, inc
- Greenwood — The Computer Experience
- Highland — Computer Health Consultants
- Indianapolis — Bookland, Inc.
- Indianapolis — Delmar News
- Indianapolis — Indiana News
- Jasper — Elex Mart
- Madison — Arco Office Supplies
- Martinsville — Radio Shack
- Wabash — Mitting's Electronics

IOWA
- Davenport — nterstate Book Store

KANSAS
- Topeka — Palmer News, Inc
- Topeka — Town Crier of Topeka, inc
- Wichita — Amateur Radio Equipment Co.
- Wichita — Lloyd's Radio

KENTUCKY
- Danville — Bovie Electronics
- Georgetown — Goodwin Electronics
- Hazard — Daniel Boone Gulf Mart
- Hopkinsville — Hobby Shop
- Louisville — The Computer Store
- Paducah — Radio Shack
- Paintsville — R-Kat Electronics
- Pikeville — Gus-Stan Enterprises
- Princeton — Miller Electronics

LOUISIANA
- Crowley — Acadiana Newsstand
- Monroe — The Book Rack

MAINE
- Brockton — Voyager Bookstore
- Caribou — Radio Shack
- Waterboro — Radio Shack

MARYLAND
- Silver Spring — Layhill Newsstand

MASSACHUSETTS
- Brockton — Voyager Bookstore
- Cambridge — Out Of Town News
- Fitchburg — Comers Book Shop
- Ipswich — Ipswich News
- Littleton — Computer Plus
- Lynn — North Shore News Co.
- Quincy — Soft Ware House
- Rehoboth — Arel Computer & Electronics

MICHIGAN
- Allen Park — Book Nook, Inc
- Dearborn — DSL Computer Products
- Durand — Robbins Electronics
- Harrison — Harrison Radio Shack
- Lowel — Curt's Sound & Home Arcade Center
- Mt Clemens — Key Book Shop
- Mt Clemens — Michigan Radio
- Muskegon — The Eight Bit Corner
- Owosso — C/C Computer Systems
- Perry — Perry Computers
- Perry — Perry Oil & Gas
- Roseville — New Horizons
- Royal Oak — Software City
- St. Johns — Clinton Electronics
- Sterling Heights — Sterling Book Center
- Tecumseh — White Electronics
- Wyoming — Gerry's Book Co.

MINNESOTA
- Minneapolis — Read-More News
- Wilmar — The Photo Shop

MISSISSIPPI
- Grenada — Stereo Store of Grenada, inc

MISSOURI
- Farmington — Ray's TV & Radio Shack
- Kirksville — T&R Electronics
- Moberly — Audio Hut
- St Louis — Book Emporium
- St Louis — Computer Xchange
- St Louis — Software Centre
- University City — Final Edition

MONTANA
- Whitefish — Consumer Electronics of Whitefish

NEBRASKA
- Lincoln — Hobby Town
- Omaha — Computers & Components

NEVADA
- Las Vegas — Hurley Electronics

NEW HAMPSHIRE
- West Lebanon — Verham News Corp.

NEW JERSEY
- Cedar Knolls — Village Computer & Software
- Cherry Hill — Software City
- Clinton — Micro World II
- Lawrenceville — Micro Con Software Center
- Linwood — Software City
- Marmora — Outpost Radio Shack
- Montvale — Software City
- Pennsville — Dave's Elect Radio Shack
- River Edge — Software City
- Rockaway — Software Station
- Vilas — Art's Electronics

NEW MEXICO
- Alamogordo — New Horizons Computer Systems
- Albuquerque — Desert Moon Distributors
- Albuquerque — Page One Newsstand

NEW YORK
- Brockport — Lift Bridge Book Shop, Inc.
- Elmira Heights — Southern Tier News Co., Inc
- Fredonia — On Line: Computer Access Center
- Hudson Falls — G.A. West & Co.
- Johnson City — Unicorn Electronics
- New York — Barnes & Noble—Sales Annex
- New York — Coliseum Books
- New York — Eastern Newsstand
- New York — Grand Central Station, Track 37

	200 Park Ave. (Pan Am #1)
	55 Water Street
	World Trade Center #2
	First Stop News
	Idle Hours Bookstore
	International Smoke Shop
	Joni Smoke
	Penn Book
	Software City
	State News
	Usercom Systems, Inc.
	Walden Books
	World Wide Media Services
N. White Plains	Software City
Rochester	Village Green
	World Wide News
Woodhaven	Spectrum Projects

NORTH CAROLINA

Aberdeen	King Electronics
	Radio Shack
Cary	News Center in Cary Village
Charlotte	Newsstand Int'l
	Papers & Paperback
Havlock	Computer Plus
Hickory	C² Books & Comics
Marion	Boomers Rhythm Center

NORTH DAKOTA

Fargo	Computer Associates

OHIO

Blanchester	JR Computer Control
Canton	Little Professor Book Center
Chardon	Thrasher Radio & TV
Cincinnati	Cinsoft
Columbiana	Fidelity Sound & Electronics
Coshocton	Utopia Software
Dayton	Huber Heights Book & Card
	Wilke News
Fairborn	News-Readers
Girard	Girard Book & News
Kent	The News Shop
Kenton	T.W. Hogan & Associates
Lakewood	Lakewood International News
Lima	Brunner News Agency
	Edu-Caterers
Miamisburg	Wilke News
Mount Orab	Mount Orab Radio Shack
Rocky River	Programs Unlimited
Toledo	Leo's Book & Wine Shop
Xenia	Fine Print Books

OKLAHOMA

Hobart	Shortgrass Electronics
Oklahoma City	Merit Micro Software
Tulsa	Steve's Book Store

OREGON

Portland	Fifth Ave. News

PENNSYLVANIA

Allison Park	Software City
Altoona	Newborn Enterprises
Brookville	Larry's Stereo Shop
Malvern	Personal Software
Philadelphia	City Software Center
	Newsy
Phoenixville	Stevens Radio Shack
Pittsburgh	All-Pro Souvenirs
Pleasant Hills	Pitt Computer & Software
Temple	Software Corner
Tunkhannock	The Donna Comm. Co
Wind Gap	Micro World
York	The Computer Center of York

RHODE ISLAND

Warwick	Software Connection

SOUTH CAROLINA

Charleston Hts.	Software Haus, Inc.
Gaffney	Gaffney Book Store
Greenville	Palmetto News Co.
Hilton Head	Megatron Corporation
Spartanburg	Software City
Union	Fleming's Electronics

TENNESSEE

Chattanooga	Anderson News Co.
	Guild Books & Periodicals
Dickson	Highland Electronics
Knoxville	Anderson News Co.
	First Byte Computer Co.
Memphis	Computer Center
	Software, Inc.
Nashville	Misko's Book Store
Smyrna	Delker Electronics

TEXAS

Elgin	The Homing Pigeon
Ft. Worth	Software Terminal
Houston	MicroSolutions
Orange	Northway Books & News
San Antonio	CoCo Nuts

UTAH

Murray	Deseret Book

VIRGINIA

Gafton	Electronics Marketing
Norfolk	I-O Computers
Richmond	Software City

WASHINGTON

Seattle	Adams News Co., Inc.
Tacoma	B & I Magazines & Books
	Nybbles 'N Bytes

WEST VIRGINIA

Huntington	Nick's News
Logan	Stan's Electronics & Radio Shack
Madison	Communications, LTD
Parkersburg	Valley News Service

WISCONSIN

Appleton	Badger Periodicals
Cudahy	Cudahy News & Hobby
Ladysmith	Electronics, Etc.
Milwaukee	Book Tree
	Booked Solid
	Booked Solid II
	Harvey Schwartz Bookshop
	Univ. of Wisconsin Bookshop
Sturgeon Bay	Door County Electronics

WYOMING

Casper	The Computer Store

ARGENTINA

Cordoba	Informatica Y Telecomunicaciones

AUSTRALIA:

Kingsford	Paris Radio Electronics

CANADA:

ALBERTA

Banff	Banff Radio Shack
Blairmore	L & K Sports & Music
Bonnyville	Paul Tercier
Brooks	Double "D" A.S.C. Radio Shack
Calgary	Billy's News
Claresholm	Radio Shack Associated Stores
Drayton Valley	Langard Electronics
Edmonton	CMD Micro
	Kelly Software Distributors
Edson	Radio Shack
Fairview	D.N.R. Furniture & TV
Fox Creek	Fox City Color & Sound
	A.S.C. Radio Shack
Ft. Saskatoon	Ft. Mall Radio Shack
Grande Cache	The Stereo Hut
Grande Centre	The Book Nook
Hinton	Jim Cooper
Innisfa	L & S Stereo
Leduc	Radio Shack Associated Stores
Lethbridge	Datafan
Lloydminster	Lloyd Radio Shack
Okotoks	Okotoks Radio Shack
Peace River	Radio Shack Associated Stores
	Tavener Software
St. Paul	Walter's Electronics
Stettler	Stettler Radio Shack
Strathmore	Wheatland Electronics
Taber	Pynewood Sight & Sound
Westlock	Westlock Stereo
Wetaskiwin	Radio Shack

BRITISH COLUMBIA

Burnaby	Compulit
Burns Lake	VT Video Works
Campbell River	TRS Electronics
Chilliwack	Charles Parker
Courtenay	Rick's Music & Stereo
Dawson Creek	Bell Radio & TV
Golden	Taks Home Furnishings
Langley	Langley Radio Shack
N. Vancouver	Microwest Distributors
Nelson	Oliver's Books
Parksville	Parksville TV
Penticton	D.J.'s Four Corner Grocery
Salmon Arm	Matrix Computing
Sidney	Sidney Electronics
Smithers	Wall's Home Furniture
100 Mile House	Tip Top Radio & TV

MANITOBA

Altona	L.A. Wiebe Ltd.
Lundar	Goranson Elec
Morden	Central Sound
The Pas	Jodi's Sight & Sound
Selkirk	G.L. Enns Elec.
Virden	Archer Enterprises
Winnipeg	J & J Electronics Ltd.

NEW BRUNSWICK

Moncton	Jeffries Enterprises
Sussex	Dewitt Elec.

NEWFOUNDLAND

Botwood	Seaport Elec.
Carbonear	Slade Realties

NOVA SCOTIA

Halifax	Atlantic News

ONTARIO

Aurora	Compu Vision
Concord	Ingram Software
Exeter	J. Macleane & Sons
Hamilton	Dataman
Hanover	Modern Appliance Centre
Huntsville	Huntsville Elec.
Kenora	Donny "B"
Kingston	T.M. Computers
Listowel	Modern Appliance Centre
South River	Max TV
	Dennis TV

QUEBEC

LaSalle	Messageries de Presse Benjamin Enr.
Pont Rouge	Boutique Bruno Laroche

SASKATCHEWAN

Assiniboia	Teistar News
Estevan	Kotyk Electronics
Moose Jaw	D&S Computer Place
Nipiwan	Cornerstone Sound
Regina	Regina CoCo Club
	Software Supermarket
Saskatoon	Everybody's Software Library
Shellbrooke	Gec. Laberge Radio Shack
Tisdale	Paul's Service
Unity	Grant's House of Sound

YUKON

Whitehorse	H & O Holdings

JAPAN

Tokyo	America Ado, Inc.

PUERTO RICO

San Juan	Software City

Also available at all B. Dalton Booksellers, and selected Coles Bookstores, Waldenbooks, Pickwick Books, Encore Books, Barnes & Noble, Little Professors, Tower Book & Records, Kroch's & Brentano's, and Community Newscenters.

ADVERTISER'S INDEX

We encourage you to patronize our advertisers — all of whom support the Tandy Color Computer. We will appreciate your mentioning **THE RAINBOW** when you contact these firms.

After Five Software 73
Ark Royal Games 147
B5 Software 49
Canyon County Devices 84
Cer-Comp 166
Challenger 148
Cinsoft 68
CNR Engineering 173
CoCo Trend 44
Cognitec 96
Colorware 22, 23, 25
Computer Center 35
Computer Friends 191
Computer Island 154, 155
Computer Plus 3
Computerware 53
Computize, Inc. 209
Cosmos Computer Services Inc. 55
Cozy Software 204
D & A Research 146
Dayton Associates of W. R. Hall, Inc. 128
Derringer Software 30, 31
Diecom .....IBC
Disto 65
Dragon User 13
DYNACALC 193
E.D C. Industries 203
Electronic Motion Control 172
Federal Hill Software 78
Hard Drive Specialists .....IFC
Hawkes Research Services 144
hi-tech 52
HJL div. of Touchstone Technology, Inc. 10
Howard Medical 34, 210
Intercomp Sounds 200
J & M Systems .....BC
J & R Electronics 149
Johnson, D.P. 199
Kelly Software Distributors 69
Mark Data Products 165
Metric Industries 195
MichTron 160
Micro Works, The 85
Microcom Software 16, 17
Microtech Consultants Inc. 71
MicroWorld 200
Mix, Tom Software 46
Moreton Bay 74
Novasoft 47
Other Guys Software, The 66
Owl-Ware 14, 15
PCM 130
Perry Computers 67
Plan-Net Forms 95
Preble's Programs, Dr. 99
Prickly-Pear Software 138
Public Domain 196
PXE Computing 7
Radio Shack 42, 43, 57, 59
Rainbow Adventure Book II 100
Rainbow Binder 177
Rainbow Bookshelf 117
Rainbow Gift Subscription 113
Rainbow On Tape 133
RAINBOWfest 50, 51
REM Industries 153
Selected Software 141
Software House, The 162
Software Support, Inc. 38, 39
Soistmann Enterprises, Inc. 136
Spectrogram 77
Spectrosystems 171
Spectrum Projects Inc. 105, 106, 107, 109, 110, 111
Speech Systems 118, 119, 120, 121
Sugar Software 169
Sunrise Software 171
T & D Software 62
T & M Enterprises 138
Tepco 103
Tothian Software Inc. 72
True Data Products 142, 143
VCR 20
Wasatchware 137
Woodstown Electronics 152
Workbase Data Systems 135
Zebra 63

Call:
Shackleford, Nolan, Davis, Gregg and Associates
Cindy Shackleford, president
Shirley Duranseau
Advertising Representative
12110 Meridian South, Suite 5
P.O. Box 73-578
Puyallup, WA 98373-0578
(206) 848-7766

Call:
Kim Vincent
Advertising Representative
The Falsoft Building
9509 U.S. Highway 42
P.O. Box 385
Prospect, KY 40059
(502) 228-4492

Call:
Jack Garland
Garland Associates, Inc.
10 Industrial Park Road
Hingham, MA 02043
(617) 749-5852

ARE YOU LOOKING FOR A HI-RES GRAPHIC SCREEN PRINT DUMP?

HARDCOPY - Hardcopy is more than just a screen print dump, compare these features with any ther graphic dump program on the market!

- Full GRAPHICOM/GRAPHICOM PART II compatibility! Loads STANDARD 6K images, GRAPHICOM pictures, and COCO MAX pictures too!
- BLACK & WHITE or GREY SCALE printing. In GREY SCALE printing, colors are printed as user definable patterns. Supports hi-res in all 4 GRAPHICOM display modes!
- **1x, 2x, 3x PRINTOUTS** - Three menu options are reserved for the most frequently used printout sizes, 1x (quarter page), 2x (half page), and 3x (full page).
- **GRAPHIC LABELS** - The label printing option allows the user to create custom mailing or disk labels with professional looking results.
- **GREETING CARDS** - The greeting card option allows the user to custom design greeting cards using both text and graphics.
- **GIANT POSTERS** - The poster option provides the user with a means of reproducing a hi-res graphic to a multi-sheet poster.
- **SPECIAL EFFECTS** - The special effects option allows the user to directly control the printing directives, ROTATION, X/Y SIZE, X/Y FLIP, X/Y GRID, X/Y FILL, TAB, WINDOW, POS/NEG IMAGE, and more!
- **USER CALL** - Have an application that **HARDCOPY** doesn't quite match? **HARDCOPY** routines can be added to EXTENDED BASIC through the USR command!

HARDCOPY* requires a 64K Color Computer or Color Computer II, and at least one disk drive. It supports 1 to 4 disk drives, keyboard or joystick input. Please specify **printer** and **cat. number** when ordering.

IDS 480/560-G	Cat. No. 170WD	Gemini 10X	Cat. No. 174WD
Oki 82A (Okigraph)	Cat. No. 179WD	Gemini SG-10/15	Cat. No. 178WD
Okidata 92	Cat. No. 171WD	DMP-105	Cat. No. 183WD
Epson LX-80	Cat. No. 173WD	DMP-110	Cat. No. 180WD
Epson MX-80	Cat. No. 172WD	DMP-120	Cat. No. 176WD
Epson RX-80	Cat. No. 173WD	DMP-130	Cat. No. 180WD
Epson FX-80	Cat. No. 173WD	DMP-200	Cat. No. 175WD
Riteman PLUS	Cat. No. 177WD	CGP-220	Cat. No. 181WD

* Due to hardware differences, some features may function differently on certain printers.

HARDCOPY

THE ULTIMATE PRINTER UTILITY

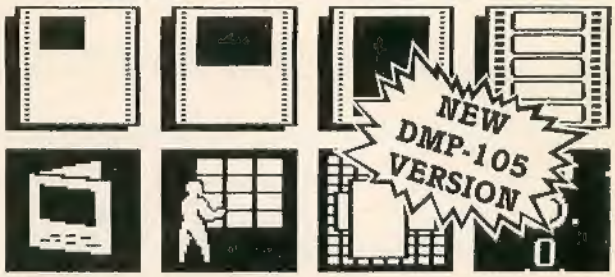

©1984 WHITESMITH V:1.0
ALL RIGHTS RESERVED

HARDCOPY PRINT UTILITY $29.95

GRAPHICOM PART II

DISTRIBUTED BY COMPUTIZE INC.

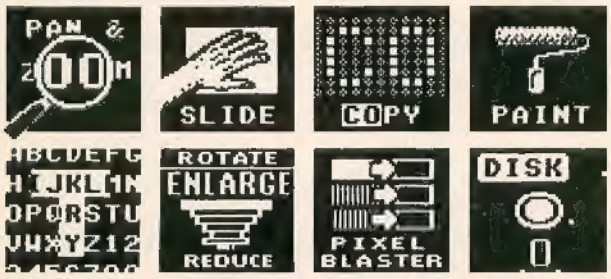

©1984 WHITESMITH V:1.0
ALL RIGHTS RESERVED

GRAPHICOM PART II $24.95

YOU COULD SPEND $100.00 OR MORE TO UPGRADE YOUR GRAPHICS SYSTEM, JUST BUY...

Eclipse (Zoom)	$19.95/Moreton Bay		
Super Paint (Paint)	$19.95/Michtron	Text Master (Hi-Res Text)	$29.95/Data Man
Shrinx (Reducer)	$21.95/Grafx	G.C.U. (Disk Utilities)	$19.95 Computize

OR YOU COULD SPEND $24.95 FOR GRAPHICOM PART II AND GET:

a video processing package that provides many functions that are missing in Graphicom. Here are just a few of the features provided by Graphicom Part II:

ENLARGE/REDUCE/ROTATE
Enlarge or reduce any portion of a graphic screen, just like a photographic enlarger! Rotate by any degree or fraction of a degree around any point on the screen.

PAINT
Paint or "fill-in" any irregular area on the screen! More than 50 different colored patterns available. Additional paint patterns may be user-defined.

PAN & ZOOM
"Zoom in" x2, x4, or x8 on any portion of the screen to do fine pixel work. Allows editing of Graphicom character sets with ease!

TYPESETTER & FONT EDITOR
Add text in 16 different sizes, also supports user definable foreground & background colors. Design & Edit characters for use in the typesetter.

PIXEL BLASTER
Allows the user to easily substitute or remove colors. Widen lines, swap BLUE & RED without effecting BLACK & WHITE, etc.

GRAPHICOM PART II DOES NOT REQUIRE GRAPHICOM TO RUN!

Graphicom Part II requires a 64K extended disk basic system, and supports 1 to 4 disk drives, keyboard or joystick (analog or switch type) input. It will load and save both **Standard BIN** files and **Graphicom** screens. All functions support color or Hi-Res operation, as well as the 4 screen display modes.

NEW LOW PRICE!
GRAPHICOM DIGITIZER $159.00

Input directly into Graphicom for easy enhancements, manipulation, stamping, and storage. Accepts composite video signal in (1.0v p-p) from video camera, VCR, video disc player, another computer, or other compatible video sources. View "off air" or "VCR" digitized video at close to real-time. "Snapshot" video frames to the digitizer's internal memory. No slow, data serial manipulation.
Use with your multi-pak, "Y" box, or a "Y" cable ("Y" cable available at $19.95) Video is input via a "BNC" connector.
External controls for HORIZONTAL POSITION, VERTICAL POSITION, HORIZONTAL WIDTH, BRIGHTNESS, and CONTRAST (FUZZ) settings.
Don't be fooled by imitations...this is the GRAPHICOM VIDEO DIGITIZER . . . the **only** digitizer that "DIRECTLY" inputs into Graphicom
REQUIRES 64K COCO, 1 DISK DRIVE, AND 2 ANALOG JOYSTICKS. FREE GRAPHICOM PROGRAM, PICTURE DISK, AND GRAPHICOM UTILITY SUPPLIED WITH PURCHASE OF VIDEO DIGITIZER (A $50 VALUE).

"Y" BOX



$29.95

GRAPHICOM $24.95

Catalog No. 111GD
Simply stated - One of the finest graphic programs written for the Color Computer!
FEATURES:
- S-U-P-E-R U-S-E-R F-R-I-E-N-D-L-Y !
- Supports 4 Hi-Res display modes
- 4 page animation mode
- Color Palette with over 15 color patterns for use with Hi-Res artifact
- Send/Receive pictures over modem
- Supplied utility allows capturing Hi-Res screens from most COCO arcade games
- Multiple Hi-Res character fonts (user redefinable)
- Supplied utility for transferring Graphicom screens to Basic or other M/L programs.
- Supplied utility for loading screens from Basic or other sources
- Built in Hi-Res SCREEN PRINT (compatible with EPSON, C-ITOH, GEMINI-10, OKI, plus Radio Shack's LP-VII, LP-VIII, DMP-100, DMP-200, and GCP-115 printers) from 110 to 9600 baud
- SEND/RECEIVE slow-scan television
- Many additional features, operating hints, hardware mod's and suggestions, etc.

REQUIRES 64K COCO, 1 DISK DRIVE, AND 2 ANALOG JOYSTICKS

NEW MASTER KEY II

New Improved Version! A hardware product that takes control of any program regardless of protection. Now use with RS Multi-pak, "Y" cable or **optional** extender cable. Captures register contents as they were when Master Key II was engaged. Complete disassembler, memory save, and much more. Requires some familiarity with Assembly Language.
ROM PAK Cat. No. 180HR . . . . . $ 99.95
Cat. No. 161HR With Ext. Cable . . . $109.95

PICTURE DISK SETS

Available from COMPUTIZE
4C - Artifact color palette
5C - Large character sets (from Derringer Software)
6C - Same as 5C but set up as stamp set
Picture Disk Set 1 . . . . . $19.95
7 - Miscellaneous Art Set #1
8 - Miscellaneous Art Set #2
9 - Miscellaneous Ads and Examples
Picture Disk Set 2 . . . . . $19.95
10 - Miscellaneous Fonts
11C - Artifact color palette type fonts
Picture Disk Set 3 . . . . . $14.95
12C - Art demo from WHITESMITH
13C - GRAPHICOM PART II function demo
Picture Disk Set 4 . . . . . $14.95

GC II FONT DISKS

Each disk contains 10 or more fonts. (4 versions of each font, one for each display mode).
14C - GCII Fonts Disk #1
15C - GCII Fonts Disk #2
16C - GCII Fonts Disk #3
GRAPHICOM PART II Font Disks . . . $19.95

TRIPLE TRANSFER UTILITY ©

Transfer contents of disk to tape • Transfer contents of tape to disk • Automatically relocates cassette programs that conflict with the disk operating system • Displays machine language program addresses • Copies ASCII, Basic, & Machine Language Programs • All contained in 1 menu driven program!
REQUIRES 32K CC EXT.
Cassette $19.95 . . Cat. No. 105CT
Disk $24.95 . . . . Cat. No. 105CD

SUPER BACK-UP UTILITY ©

...WITH S.B.U. FROM COMPUTIZE — YOU'LL NEVER NEED ANOTHER BACK-UP UTILITY FOR YOUR COCO!!!
SUPER BACK-UP UTILITY WILL PERFORM **ALL** OF THE FOLLOWING FUNCTIONS:
1. **TAPE TO TAPE** (Regardless of most protection schemes!)
2. **TAPE TO DISK** (Move Cassette programs to Disk!)
3. **AUTO RELOCATE** (For those Cassette programs that conflict with Disk operating systems.)
4. **DISK TO TAPE** (Place Disk programs onto Cassette)
5. **DISK TO DISK** (Our powerful Split-N-Image Program, Copies regardless of most protection schemes!)

- **MENU DRIVEN**
- **REQUIRES 32K EXTENDED COCO**
- **REQUIRES 1 OR 2 DRIVES**
- **ALL MACHINE LANGUAGE!!!**

COMPARE WITH OTHER INDIVIDUAL PROGRAMS COSTING IN EXCESS OF $100.00
DISK $49.95 . . . . Cat. No. 107CD

SPIT-N-IMAGE ©

M/L Disk Back-Up Utility
There is no need to suffer the heartbreak of crashed disks any longer. Spit-N-Image will create a mirror image of your valuable disk programs which do not respond to normal back-up functions. Will also initialize and back-up in one pass. Data processing experts always insist on having a back-up — it's good a practice.
REQUIRES 32K CC
DISK $34.95 . . . . Cat. No. 101CD

Check or M.O.
Add $3.00 shipping

Computize INC.

(215) 946-7260 P.O. BOX 207 • LANGHORNE, PA 19047

PA residents add 6% sales tax

800-443-1444 ORDERS

SPECIALS

Howard Medical Computers

Zenith 123A Monitor

- 12" Zenith 123A Green Screen is easy on the eyes
- High resolution: 640 dots x 200 dots
- 15 MHz band width non glare screen
- 30 day warranty at over 1200 Zenith repair locations

REPACK 80 COLUMN

$67.50
Reg. $11
($7 shipping)

pbj Word Pack RS

This ROM pack is the hardware answer for an 80 column display. It includes a built-in video controller to drive a monochrome monitor like our 123A. To get started, you need OS-9 2.0, a Y cable or multipack interface, drive 0, and a monochrome monitor.

$89
($2 shipping)

Color Monitor "Epson"

- Medium resolution 200 x 240 dots
- Built in speaker
- 2 year warranty

40 COLUMN

$149
Was $35
($14 shipping)

Payrol/BAS™	$79.95
W-2	$29.95
941	$29.95
VIP Intergrated Library	$125.

Was $149
($2 shipping)

J&M CONTROLLER

- Metal case: I/O buffered
- Parallel port for Gemini and Epson printers
- Hard Disk driver included
- Single switch lets you switch from JDOS to RS DOS
- Gold contacts & data separator

JFD-CP with JDOS

$128
Reg. $149
($2 shipping)

RS DOS ROM

- ROM chip makes J&M compatible
- 24 pin fits both versions of J&M controller
- Release 1.1

$20/ea.
Reg. $40
($2 shipping)

Howard Medical Computers

1690 Elston, Chicato, IL 60622

Hours: 8-4 Mon.-Fri.
10-3 Sat.

(312) 278-1440

Howard Medical offers a 30-day return guarantee on all hardware we sell. Return equipment to us within 30 days for a refund (less shipping) if you are unsatisfied for any reason. Quantities limited and subject to availability.

DIECOM PRODUCTS

GANTELET

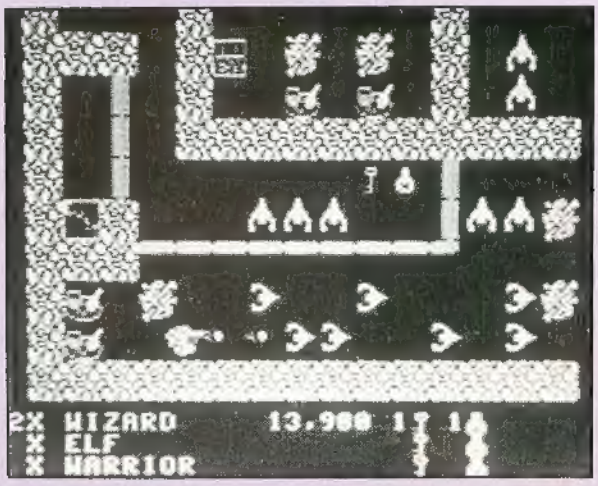

One, two or even three people can play Gantelet at the same time. You and your friends travel through the many levels in search of an exit to the next level. Avoid the Ghosts and other creatures that are out to stop you in your quest. Collect keys to open doors, treasures and magic potions to aid you in your battle. Watch out for hidden traps as you frantically search for the exit to the next level.

64 k required
tape or disk

$28.95 U.S.
$38.95 Can.

Mission: F-16 ASSAULT

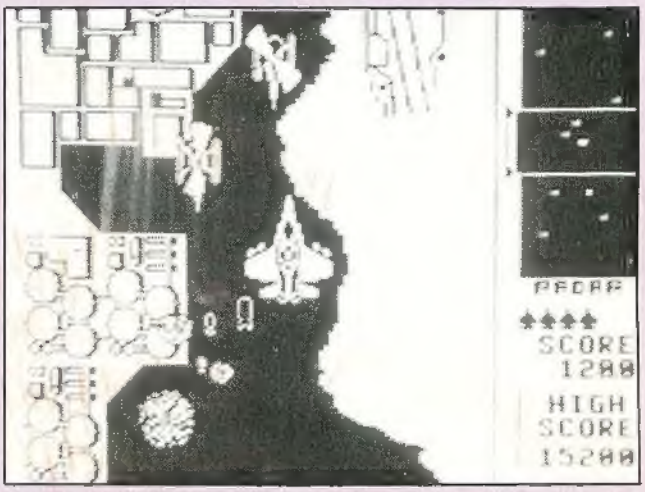

Fly your plane over land and water while avoiding enemy missiles, planes and helicopters attacking from the top and bottom of the screen. Use your radar to track objects as they approach the main screen. Bomb oil refineries, airports and destroy planes before they can take off from the airports. Watch out for missiles fired from hidden missile silos on the ground. Dozens of screens of detailed terrain plus increasing difficulty make this a great game for everyone.

64 k and joystick required
tape or disk

$28.95 U.S.
$38.95 Can.

PAPER ROUTE



As a paper boy, you ride your bike along your route delivering papers to your customers. Break customers' windows or damage their property and they will cancel their subscriptions! Earn bonus points by damaging non-subscribers' property. Avoid pedestrians, cars, and maybe even a mad dog in your attempt to deliver all of your papers! Detailed graphics and lots of surprises make this game a real challenge for everyone.

64 k
joystick required
tape or disk

$28.95 U.S.
$38.95 Can.

MARBLE MAZE

Move your marble around the mazes in your search for the finish line! Avoid marble eaters, acid puddles and other creatures that inhabit the mazes. Eight different levels and great graphics make this game a must for your collection.

joystick required

KNOCK OUT

Fight against five different boxers in this great boxing game! At first the boxers are easy to knock out, but beware, it gets harder as you move on. The boxers are out to stop you in your quest to become champion of the world. Outstanding graphics make this a must for your collection!

KARATE

Challenge the computer, or a friend to a Karate match! Use various Karate punches and kicks to knock your opponent down and earn points to win the match. When challenging the computer, your opponent's Karate skills increase as you win matches. This game is a challenge for even the expert game player.

joystick required

64 k required **tape or disk** **$28.95** U.S. **$38.95** Can.

COMING SOON:
Mission:
RUSH'N ASSAULT

DIECOM PRODUCTS

6715 FIFTH LINE, MILTON, ONT., CANADA L9T 2X8

We accept:

VISA MasterCard

cheque or money order

24 hr. order line:
(416) 878-8358
personal service 9-5

Please add $2 for shipping & handling. Ontario residents add 7% sales tax. C.O.D. Canada only. Dealer Inquiries invited Looking for new software.

HEAT UP YOUR COCO!

New HARD DRIVES

Besides the obvious advantage of increased disk access speeds and a vast amount of storage, our COCO hard drives boast many innovative features. For instance, you may boot OS/9 directly from JDOS - no intermediate boot floppy is required. Our software can run with virtually any winchester with a ST412 type interface. Our drives have capacities of 5, 10, or 20 MBytes (formatted), and may be either partitioned into up to 7 logical units or left as one large logical unit. Our COCO hard drive systems are complete with case, power supply, cables, OS/9 drivers, and instructions. Prerequisite: OS/9, JFD-CP controller.

5¼" 5 MByte full size	$495
5¼" 10 MByte ½ size	$650
3½" 20 MByte (shown above)	$795

JFD-CP DISK CONTROLLER

Our new JFD-CP, compatible with both the original COCO and the COCO 2, features a parallel port to support a Centronics compatible printer or our hard drive, and an external ROM switch, which allows you to select JDOS or an optional RS DOS-type ROM. It comes in a case and includes JDOS 1.2 and manual. JDOS implements all RS DOS commands, plus many more, including auto line numbering, error trapping, baud rate selection, OS/9* boot from floppy or hard drive, and Memory Minder**, our disk drive analysis program (Precision Alignment Disk not included).

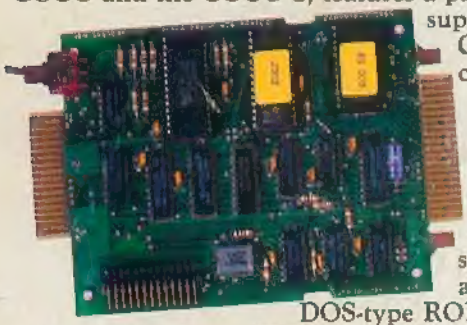

JFD-CP Disk Controller with JDOS $139

COCO-CLASSIC

Our old JFD-COCO controller remains a strong seller. Some people just like old "classics" best! So we have brought it back at the lowest price ever!

JFD-COCO Disk Controller with JDOS $99

New TERMS

One-year warranty on parts & labor; 30-day money back guarantee (except shipping) if not totally satisfied. Items must be returned in like new condition.

Free shipping via UPS in continental United States for payment by VISA, MasterCard, or cashiers check. COD requires 10% prepayment by bank card plus 3% shipping. Blue Label and foreign shipping extra.

DRIVE SYSTEMS

Upgrade your Color Computer by adding our new JFD-CP disk controller, supercharged with JDOS 1.2 operating system, and a top quality drive with case and power supply. Comes complete with cable and JDOS manual.

Drive 0 System with one single side drive	$279
Drive 0 System with one double side drive	$349
Drive 0,1 System with two single side drives	$389
Drive 0,1 System with two double side drives	$489

MEMORY MINDER**

Memory Minder is a disk drive test program now included in JDOS. Used with a Precision Alignment Disk, Memory Minder allows you to check your drives for speed, alignment, sensitivity, hysteresis, and more! You can actually align or adjust the drives while viewing the graphics on the screen. No special equipment needed!

PRECISION ALIGNMENT DISKS (From Dysan)

PAD-40X1: Tests single side disk drives	$26
PAD-40X2: Tests double/single disk drives	$33

Memory Minder is available on diskette for those who don't own a JFD-CP controller with JDOS. Includes Precision Alignment disk.

Memory Minder: single side package	$59
Memory Minder: single/double side package	$75

*OS/9 is a registered trademark of Microware, Inc.
**Memory Minder is a registered trademard of J&M Systems, Ltd.

J&M SYSTEMS, LTD.
15100-A CENTRAL SE
ALBUQUERQUE, NEW MEXICO 87123
505/292-4182